

FENAFLEX KYTKIMET

Tärinänkestävä

FF110G

Fenaflex kumielementti



- Helppo ja nopea asennus.
- max 4 ° kulmapoikkeama, 6 mm radiaalinen- ja 8 mm aksiaalinsiirtymä.
- Kumielementit saatavana FRAS ja ATEX-hyväksynnällä.
- Saatavana esiporattulla tai taperlock kiinnityksellä.
- Kunnonvalvonta helppo toteuttaa

TUOTEKUVAUS


Fenaflex on joustava kytkin joka kestää suuria radiaalisia- ja aksiaalisia siirtymiä. Kytkin kestää suuret kulmapoikkeamat akseleissa. Asennus on kytkimen rakenteen vuoksi helppoa ja kunnossapidossa kytkinelementin vaihto on helppo ja nopea. Kumielementit saatavana myöskin FRAS (Fire Resistant Anti Static) ja ATEX hyväksynnällä.

Kytkimen rakenne kestää myös tärinää.

TEKNISET TIEDOT


TIEDOT

A	279 mm
Koko	110

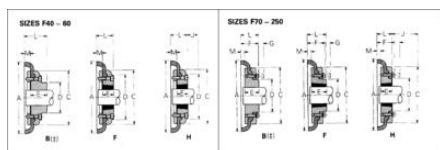


		Coasting Speed															
Speed	met/min	F40	F50	F60	F70	F80	F90	F100	F110	F120	F140	F160	F180	F200	F220	F240	
100	0.28	0.68	1.33	2.42	3.93	5.24	6.37	7.19	8.18	9.33	10.43	11.57	12.75	13.97	15.24	16.54	
200	0.50	1.28	2.56	5.74	7.85	10.50	12.14	13.80	15.29	16.87	18.49	20.17	21.90	23.68	25.51	27.37	
300	0.75	2.07	3.89	8.80	11.80	15.70	21.30	25.00	28.14	30.78	33.48	36.14	38.86	41.54	44.19	46.81	
400	1.00	2.86	5.18	11.76	16.00	21.40	28.40	33.40	37.80	41.60	45.40	49.10	52.70	56.30	59.90	63.50	
500	1.28	3.46	6.35	13.10	18.60	25.20	33.20	39.20	44.60	49.40	53.60	57.70	61.70	65.60	69.50	73.40	
600	1.50	4.06	7.50	15.56	21.60	29.20	38.40	45.20	51.40	56.80	61.60	66.20	70.70	75.10	79.50	83.90	
700	1.76	4.64	8.51	18.30	25.60	34.40	45.20	53.00	60.00	66.40	72.00	77.40	82.60	87.60	92.60	97.60	
800	2.00	5.21	9.63	20.90	29.00	39.00	50.80	59.60	68.00	75.00	81.60	87.80	93.80	99.60	105.40	111.20	
900	2.25	5.78	10.70	23.36	32.00	43.20	56.00	65.60	75.00	83.20	90.00	96.40	102.60	108.60	114.60	120.60	
960	2.41	6.03	12.80	25.10	33.70	45.60	59.60	69.60	79.60	88.00	95.20	102.00	108.80	115.60	122.40	129.20	
1000	2.50	6.25	13.50	26.50	35.60	48.00	62.40	72.80	83.20	91.60	98.80	105.60	112.40	119.20	126.00	132.80	
1100	3.00	6.25	16.00	31.40	40.70	53.60	68.80	79.60	90.40	100.00	109.20	118.00	126.80	135.60	144.40	153.20	
1200	3.50	6.75	17.50	34.40	44.80	58.40	74.40	85.60	96.80	106.40	115.20	124.00	132.80	141.60	150.40	159.20	
1400	4.32	8.08	19.00	37.70	50.50	64.80	81.60	93.20	104.80	115.60	125.60	135.60	145.60	155.60	165.60	175.60	
1600	4.62	11.00	21.30	41.40	55.20	70.40	88.00	100.00	112.00	123.20	133.60	144.00	154.40	164.80	175.20	185.60	
1800	5.00	12.00	23.80	44.70	59.60	75.60	93.60	106.40	119.20	132.00	144.00	156.00	168.00	180.00	192.00	204.00	
2000	5.50	13.80	26.90	52.40	70.00	90.40	110.40	126.40	142.40	158.40	174.40	190.40	206.40	222.40	238.40	254.40	
2200	6.00	15.00	29.60	57.20	76.40	98.40	119.60	136.80	153.60	170.40	187.20	204.00	220.80	237.60	254.40	271.20	
2400	6.63	16.60	31.60	62.40	83.20	106.40	129.60	148.80	168.00	187.20	206.40	225.60	244.80	264.00	283.20	302.40	
2600	7.25	18.00	34.00	67.20	89.60	113.60	137.60	158.40	179.20	199.20	219.20	239.20	259.20	279.20	299.20	319.20	
2800	7.94	19.50	36.70	72.30	101.00	125.00	150.00	172.00	194.00	216.00	238.00	260.00	282.00	304.00	326.00	348.00	
3000	8.54	20.70	39.60	76.80	106.00	130.00	156.00	178.00	200.00	222.00	244.00	266.00	288.00	310.00	332.00	354.00	

The figures in heavier type are for standard conditions. All these power ratings are calculated at constant torque. For speeds below 1000 met/min intermediate speed values use nominal torque values.

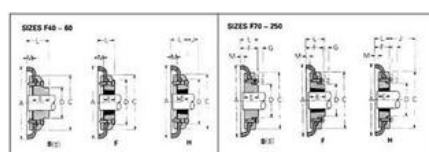

DIMENSIONS OF RENAFLEX PLANCES TYPES B, F & H

[illegible]

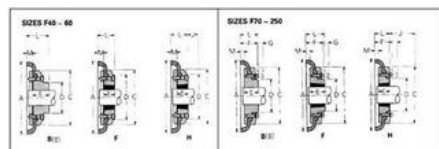

The figures in heavier type are for standard motor speeds. All these power ratings are calculated at constant torque. For speeds below 100 rev/min and intermediate speed use nominal torque ratings.

[illegible][illegible]