

FENAFLEX KYTKIMET

Tärinänkestävä

FF110GF

Fenaflex kumielementti FRAS + ATEX



- Helppo ja nopea asennus.
- max 4 ° kulmapoikkeama, 6 mm radiaalinen- ja 8 mm aksiaalinsiirtymä.
- Kumielementit saatavana FRAS ja ATEX-hyväksynnällä.
- Saatavana esiporatulla tai taperlock kiinnityksellä.
- Kunnonvalvonta helppo toteuttaa

TUOTEKUVAUS


Fenaflex on joustava kytkin joka kestää suuria radiaalisia- ja aksiaalisia siirtymiä. Kytkin kestää suuret kulmapoikkeamat akseleissa. Asennus on kytkimen rakenteen vuoksi helppoa ja kunnossapidossa kytkinelementin vaihto on helppo ja nopea. Kumielementit saatavana myöskin FRAS (Fire Resistant Anti Static) ja ATEX hyväksynnällä.

Kytkimen rakenne kestää myös tärinää.


TEKNISET TIEDOT

TIEDOT

A	279 mm
Koko	110

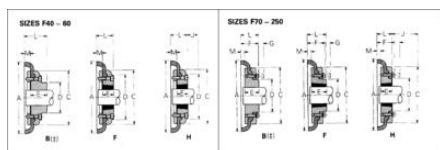


		Coasting Speed															
Speed m/min	F40	F50	F60	F70	F80	F90	F100	F110	F120	F140	F160	F180	F200	F220	F240	F260	
100	0.28	0.46	0.73	1.02	1.35	1.74	2.17	2.64	3.15	3.70	4.29	4.91	5.57	6.27	7.00	7.76	8.54
120	0.50	0.78	1.26	1.84	2.54	3.35	4.28	5.34	6.50	7.78	9.18	10.70	12.34	14.01	15.71	17.44	19.19
140	0.75	1.07	2.07	2.99	4.08	5.30	6.66	8.16	9.79	11.54	13.42	15.43	17.56	19.81	22.18	24.66	27.16
160	1.02	1.47	2.82	4.04	5.46	7.01	8.68	10.47	12.38	14.41	16.56	18.83	21.22	23.72	26.33	28.94	31.56
180	1.28	1.86	3.45	4.95	6.59	8.37	10.28	12.31	14.45	16.70	19.06	21.54	24.04	26.55	29.07	31.60	34.13
200	1.54	2.24	4.18	5.94	7.84	9.87	12.03	14.31	16.71	19.14	21.60	24.09	26.59	29.10	31.61	34.13	36.65
220	1.79	2.61	4.81	6.81	9.00	11.30	13.70	16.19	18.76	21.36	23.90	26.47	29.06	31.64	34.21	36.78	39.34
240	2.01	2.93	5.43	7.69	10.20	12.80	15.46	18.17	20.91	23.68	26.47	29.27	32.08	34.88	37.67	40.45	43.22
260	2.21	3.25	6.03	8.56	11.34	14.26	17.31	20.40	23.52	26.66	29.82	32.99	36.16	39.32	42.47	45.61	48.74
280	2.39	3.55	6.59	9.36	12.34	15.46	18.71	22.00	25.31	28.64	31.98	35.32	38.65	41.97	45.28	48.58	51.86
300	2.55	3.83	7.07	10.00	13.14	16.41	19.81	23.24	26.70	30.17	33.63	37.08	40.52	43.95	47.36	50.75	54.12
320	2.70	4.09	7.59	10.75	14.04	17.44	21.00	24.59	28.20	31.81	35.41	38.99	42.55	46.09	49.62	53.13	56.62
340	2.84	4.35	8.16	11.36	14.80	18.33	22.00	25.71	29.42	33.12	36.81	40.48	44.13	47.76	51.37	54.96	58.53
360	2.97	4.59	8.70	11.96	15.44	19.06	22.83	26.64	30.44	34.23	38.00	41.75	45.48	49.19	52.88	56.55	60.20
380	3.09	4.82	9.21	12.54	16.10	19.76	23.64	27.54	31.43	35.30	39.15	42.88	46.59	50.28	53.95	57.60	61.24
400	3.20	5.03	9.69	13.09	16.74	20.49	24.46	28.45	32.33	36.20	40.04	43.76	47.46	51.14	54.80	58.45	62.08
420	3.31	5.23	10.15	13.62	17.36	21.20	25.26	29.34	33.20	37.05	40.88	44.59	48.28	51.94	55.58	59.21	62.82
440	3.41	5.42	10.60	14.14	17.97	21.90	26.04	30.20	34.04	37.87	41.68	45.38	49.07	52.72	56.35	59.97	63.57
460	3.51	5.60	11.04	14.65	18.56	22.59	26.83	31.03	34.85	38.68	42.48	46.17	49.85	53.50	57.13	60.74	64.34
480	3.60	5.78	11.47	15.15	19.14	23.26	27.60	31.80	35.60	39.40	43.17	46.					

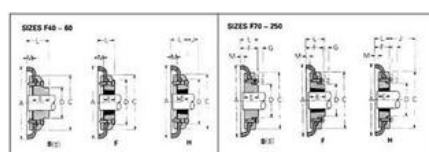

DIMENSIONS OF RENAFLEX PLANCES TYPES B, F & H

[illegible]

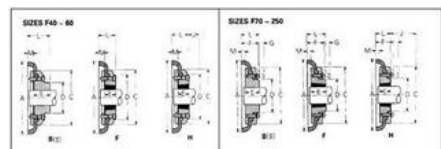

The figures in heavier type are for standard motor speeds. All these power ratings are calculated at constant torque. For speeds below 100 rev/min and intermediate speed use nominal torque ratings.

[illegible]

Category	Site	Year	Age	Sex	Height	Weight	Arm span	Hand length	Hand width	Hand area	Hand volume	Hand index	Hand length/width	Hand area/length	Hand volume/length	Hand index/length	Hand length/width	Hand area/length	Hand volume/length	Hand index/length
E3000000	E3000000	1990	10	M	1.35	25.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	M	1.45	30.0	1.80	20.0	9.0	81.0	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
	E3000000	1990	10	F	1.20	18.0	1.55	16.5	7.0	49.0	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
	E3000000	1990	10	M	1.35	24.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
E3000000	E3000000	1990	10	M	1.35	25.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	M	1.45	30.0	1.80	20.0	9.0	81.0	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
	E3000000	1990	10	F	1.20	18.0	1.55	16.5	7.0	49.0	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
	E3000000	1990	10	M	1.35	24.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
E3000000	E3000000	1990	10	M	1.35	25.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	M	1.45	30.0	1.80	20.0	9.0	81.0	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
	E3000000	1990	10	F	1.20	18.0	1.55	16.5	7.0	49.0	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
	E3000000	1990	10	M	1.35	24.0	1.70	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	E3000000	1990	10	F	1.25	20.0	1.60	17.0	7.5	56.25	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80	0.80
	E3000000	1990	10	M	1.40	28.0	1.75	19.0	8.5	72.25	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10	1.10
	E3000000	1990	10	F	1.30	22.0	1.65	18.0	8.0	64.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00