

## L12-KARAMOOTTORI

Pieni karamoottori

L12-10-50-12-S  
Karamoottori



- 6/12 VDC
- 80N
- 20% käyttöaste
- IP54
- Isku 10-100mm

### TUOTEKUVAUS

Actuonix Motion Devices valmistaa kompakteja ja pieniä karamoottoreita.


L12 sarja on monipuolinen perusominaisuuksiltaan ja lisävarusteena on saatavana potentiometri ja päätyrajakytkimet.

## TEKNISET TIEDOT

IP-luokka	IP54
Iskun pituus	10 mm
Käyttöjännite	12 V DC
Käyttösykli	20 %
Max. käyttölämpötila	50 °C
Max. työntövoima	22 N
Max. vetovoima	22 N
Min. käyttölämpötila	-10 °C
Nimellisa nopeus, ei kuormaa	25 mm/s
Paino	28 g
Pitovoima	12 N
Välityssuhde	50:1
Äänenpaine	55 dB

**L12-SS-GG-VV-C**

feature	Options
<b>SS:</b> Stroke Length	<b>10, 30, 50, 100</b>
<b>GG:</b> Gear reduction ratio (refer to load curves above)	<b>50, 100, 210</b> (lower ratios are faster but push less force, and vice versa)
<b>VV:</b> Voltage (DC volts)	<b>6, 12</b>
<b>C:</b> Controller	<b>S</b> Limit Switches <b>P</b> Potentiometer Feedback <b>I</b> Integrated Controller <b>R</b> RC Servo Integrated Controller

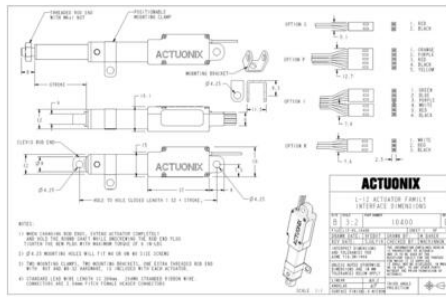

**L12-SS-GG-VV-C**

feature	Options
<b>SS:</b> Stroke Length	<b>10, 30, 50, 100</b>
<b>GG:</b> Gear reduction ratio (refer to load curves above)	<b>50, 100, 210</b> (lower ratios are faster but push less force, and vice versa)
<b>VV:</b> Voltage (DC volts)	<b>6, 12</b>
<b>C:</b> Controller	<b>S</b> Limit Switches <b>P</b> Potentiometer Feedback <b>I</b> Integrated Controller <b>R</b> RC Servo Integrated Controller

