

## L12-KARAMOOTTORI

Pieni karamoottori

L12-50-100-6-P

Karamoottori



- 6/12 VDC
- 80N
- 20% käyttöaste
- IP54
- Isku 10-100mm

### TUOTEKUVAUS

Actuonix Motion Devices valmistaa kompakteja ja pieniä karamoottoreita.


L12 sarja on monipuolinen perusominaisuuksiltaan ja lisävarusteena on saatavana potentiometri ja päätyrajakytkimet.

### TEKNISET TIEDOT

|                              |          |
|------------------------------|----------|
| IP-luokka                    | IP54     |
| Iskun pituus                 | 50 mm    |
| Käyttöjännite                | 6,0 V DC |
| Käyttösykli                  | 20 %     |
| Max. käyttölämpötila         | 50 °C    |
| Max. työntövoima             | 42 N     |
| Max. vetovoima               | 42 N     |
| Min. käyttölämpötila         | -10 °C   |
| Nimellisa nopeus, ei kuormaa | 13 mm/s  |
| Paino                        | 40 g     |
| Pitovoima                    | 22 N     |
| Välityssuhde                 | 100:1    |
| Äänenpaine                   | 55 dB    |

L12-SS-GG-VV-C

| feature                                                      | Options                                                                                                                                 |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>SS:</b> Stroke Length                                     | <b>10, 30, 50, 100</b>                                                                                                                  |
| <b>GG:</b> Gear reduction ratio (refer to load curves above) | <b>50, 100, 210</b><br>(lower ratios are faster but push less force, and vice versa)                                                    |
| <b>VV:</b> Voltage                                           | <b>6, 12</b><br>(DC volts)                                                                                                              |
| <b>C:</b> Controller                                         | <b>S</b> Limit Switches<br><b>P</b> Potentiometer Feedback<br><b>I</b> Integrated Controller<br><b>R</b> RC Servo Integrated Controller |

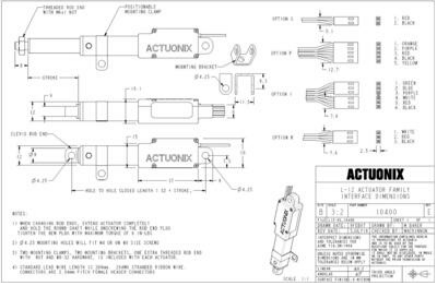

L12-SS-GG-VV-C

| feature                                                      | Options                                                                                                                                 |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <b>SS:</b> Stroke Length                                     | <b>10, 30, 50, 100</b>                                                                                                                  |
| <b>GG:</b> Gear reduction ratio (refer to load curves above) | <b>50, 100, 210</b><br>(lower ratios are faster but push less force, and vice versa)                                                    |
| <b>VV:</b> Voltage                                           | <b>6, 12</b><br>(DC volts)                                                                                                              |
| <b>C:</b> Controller                                         | <b>S</b> Limit Switches<br><b>P</b> Potentiometer Feedback<br><b>I</b> Integrated Controller<br><b>R</b> RC Servo Integrated Controller |

