

HRC KYTKIMET

Sähkömoottoreihin

HRC 070 B

Kytkin esiporattu akselireikä

- Helppo ja nopea asennus
- Saatavana myöskin antistaattisena
- Erinomainen suorituskyky edullisesti




TUOTEKUVAUS

HRC kytkimet ovat joustavia ja ne on helppo ja nopea asentaa paikalleen, esimerkiksi Taper-Lock -holkeilla. Ne soveltuvat siksi erinoimaisesti sähkömoottorien kanssa käytettäväksi. Saatavilla myös esiporattuna. HRC kytкимиä on myöskin saatavana palonkestävänä ja antistaattisena.

TEKNISET TIEDOT


TIEDOT

A	69 mm
B	60 mm
C	20 mm
D	23,5 mm
E	31 mm
F	25 mm
G	18 mm
Koko	70
Ruuvien koko	M6
Onton akselin maksimi halkaisija	32 mm
Maximum bore	32 mm



Speed RPM/min	Coupling Size						
	70	90	110	130	150	200	280
100	2,32	2,84	3,68	4,36	5,28	6,96	10,00
200	0,66	0,83	1,09	1,30	1,59	2,10	3,00
400	0,32	0,41	0,54	0,65	0,79	1,05	1,50
600	0,26	0,33	0,45	0,54	0,66	0,87	1,25
720	0,27	0,33	0,44	0,53	0,64	0,85	1,22
900	0,27	0,34	0,45	0,54	0,65	0,86	1,23
1100	0,26	0,33	0,44	0,53	0,64	0,85	1,22
1400	0,25	0,32	0,43	0,52	0,63	0,84	1,21
1600	0,24	0,31	0,42	0,51	0,62	0,83	1,20
1800	0,24	0,31	0,42	0,51	0,62	0,83	1,20
2000	0,23	0,30	0,41	0,50	0,61	0,82	1,19
2200	0,23	0,30	0,41	0,50	0,61	0,82	1,19
2400	0,22	0,29	0,40	0,49	0,60	0,81	1,18
2600	0,22	0,29	0,40	0,49	0,60	0,81	1,18
2800	0,21	0,28	0,39	0,48	0,59	0,80	1,17
3000	0,21	0,28	0,39	0,48	0,59	0,80	1,17
3600	0,20	0,27	0,38	0,47	0,58	0,79	1,16

Nominal Torque (Nm)	31,5	80	160	315	600	960	2000	3150
Max Torque (Nm)	72	180	360	720	1000	2000	5000	7200




PHYSICAL DIMENSIONS AND CHARACTERISTICS

Size	Common Dimensions					Type F & H				Type B						
	A	B	E	F, I	G	Bush size	Max. Bore	C	D	J†	Max. Flange HB	Screw (over key)	C	D		
70	69	60	31	20.0	18.0	1008	25	17	20.0	23.5	29	32	8	M 6	20	23.5
80	85	70	32	20.5	22.5	1108	28	17	19.5	23.5	29	42	10	M 6	20	20.0
110	112	100	45	40.0	29.0	1610	42	17	18.5	28.5	38	50	10	M10	37	45.0
120	120	100	60	53.0	36.0	1610	42	17	18.5	28.5	38	60	15	M10	39	47.5
150	150	115	67	60.0	40.0	2070	50	27	22.5	33.5	42	70	20	M10	46	56.0
160	160	125	77	73.0	49.0	2517	60	27	34.5	46.5	48	80	25	M12	77	50.0
200	225	150	89	88.5	58.5	3020	75	27	38.5	52.5	50	100	25	M12	77	50.0
260	275	200	119	105.5	78.5	3025	100	4	51.0	66.5	67	115	30	M16	90	105.5


† J † is the wrench clearance required for tightening/loosening the bush on the shaft. A shortened wrench will allow this dimension to be reduced.
 † F † refers to combinations of flanges: FF, FH, HH, FB, HB, BB.
 Bore limits H7 unless otherwise specified.

Size	Assembled Length (L*) Comprising Flange Types			Mass kg†	Inertia M ² kgm ² †	Dynamic Stiffness (N/m) ²	Maximum Misalignment		Nominal Torque (Nm)
	FF FH HH	FB HB	BB				Parallel	Axial	
70	65.0	65.0	65.0	1.50	0.00089	-	0.3	+0.2	31
80	89.5	76.0	82.5	1.78	0.00175	-	0.3	+0.5	80
110	160.0	189.5	118.0	5.30	0.00490	85	0.3	+0.6	180
120	160.0	153.0	131.0	5.49	0.00790	130	0.4	+0.8	315
150	202.0	129.5	152.0	7.11	0.01510	175	0.4	+0.9	600
160	142.0	165.5	169.0	16.60	0.04340	229	0.4	+1.1	950
200	164.5	202.0	208.5	26.60	0.12688	567	0.5	+1.3	2000
260	207.5	248.5	285.5	50.00	0.46653	1025	0.5	+1.7	3150



Speed rpm†	Coupling Size									
	70	80	110	130	150	160	200	230	260	290
100	0.33	0.84	1.68	3.30	6.28	9.96	20.90	33.00		
200	0.66	1.68	3.36	6.60	12.56	19.92	41.80	65.00		
400	1.32	3.36	6.72	13.20	25.12	39.84	83.60	130.00		
600	1.98	5.04	10.08	19.80	37.70	59.76	125.40	195.00		
720	2.37	6.03	12.06	23.80	45.20	71.60	151.00	238.00		
800	2.64	6.72	13.44	26.40	50.40	75.60	166.00	258.00		
960	3.17	8.04	16.08	31.70	60.30	90.50	201.00	312.00		
1000	3.30	8.40	16.80	33.00	62.80	95.50	209.00	320.00		
1140	3.76	9.54	19.08	37.60	71.52	109.20	232.40	354.00		
1600	5.28	13.44	26.88	52.80	100.80	151.20	325.00	528.00		
1800	5.94	15.12	30.24	59.40	113.00	170.00	372.00	590.00		
2000	6.60	16.80	33.60	66.00	126.00	190.00	416.00	660.00		
2200	7.26	18.48	36.96	72.60	138.00	210.00	461.00	726.00		
2400	7.92	20.16	40.32	79.20	150.00	228.00	503.00	792.00		
2600	8.58	21.96	43.92	85.80	162.00	246.00	545.00	858.00		
2800	9.24	23.76	47.52	92.40	174.00	264.00	587.00	924.00		
3000	9.90	25.56	51.12	99.00	186.00	282.00	629.00	990.00		
3600	11.88	30.78	61.56	118.80	228.00	342.00	771.00	1188.00		

Nominal Torque (Nm) 315 60 160 315 600 960 3000 3150
 Max Torque (Nm) 72 180 360 720 1500 2350 5000 7200

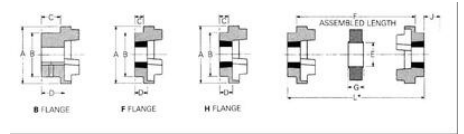

PHYSICAL DIMENSIONS AND CHARACTERISTICS

Size	Common Dimensions					Type F & H				Type B						
	A	B	E	F, I	G	Bush size	Max. Bore	C	D	J†	Max. Flange HB	Screw (over key)	C	D		
70	69	60	31	20.0	18.0	1008	25	17	20.0	23.5	29	32	8	M 6	20	23.5
80	85	70	32	20.5	22.5	1108	28	17	19.5	23.5	29	42	10	M 6	20	20.0
110	112	100	45	40.0	29.0	1610	42	17	18.5	28.5	38	50	10	M10	37	45.0
120	120	100	60	53.0	36.0	1610	42	17	18.5	28.5	38	60	15	M10	39	47.5
150	150	115	67	60.0	40.0	2070	50	27	22.5	33.5	42	70	20	M10	46	56.0
160	160	125	77	73.0	49.0	2517	60	27	34.5	46.5	48	80	25	M12	77	50.0
200	225	150	89	88.5	58.5	3020	75	27	38.5	52.5	50	100	25	M12	77	50.0
260	275	200	119	105.5	78.5	3025	100	4	51.0	66.5	67	115	30	M16	90	105.5

† J † is the wrench clearance required for tightening/loosening the bush on the shaft. A shortened wrench will allow this dimension to be reduced.
 † F † refers to combinations of flanges: FF, FH, HH, FB, HB, BB.
 Bore limits H7 unless otherwise specified.

Size	Assembled Length (L*) Comprising Flange Types			Mass kg†	Inertia M ² kgm ² †	Dynamic Stiffness (N/m) ²	Maximum Misalignment		Nominal Torque (Nm)
	FF FH HH	FB HB	BB				Parallel	Axial	
70	65.0	65.0	65.0	1.50	0.00089	-	0.3	+0.2	31
80	89.5	76.0	82.5	1.78	0.00175	-	0.3	+0.5	80
110	160.0	189.5	118.0	5.30	0.00490	85	0.3	+0.6	180
120	160.0	153.0	131.0	5.49	0.00790	130	0.4	+0.8	315
150	202.0	129.5	152.0	7.11	0.01510	175	0.4	+0.9	600
160	142.0	165.5	169.0	16.60	0.04340	229	0.4	+1.1	950
200	164.5	202.0	208.5	26.60	0.12688	567	0.5	+1.3	2000
260	207.5	248.5	285.5	50.00	0.46653	1025	0.5	+1.7	3150