

HRC KYTKIMET

Sähkömoottoreihin

HRC 070 H

Kytkin H taper-lock kiinnityksellä

- Helppo ja nopea asennus
- Saatavana myöskin antistaattisena
- Erinomainen suorituskyky edullisesti




TUOTEKUVAUS

HRC kytkimet ovat joustavia ja ne on helppo ja nopea asentaa paikalleen, esimerkiksi Taper-Lock -holkeilla. Ne soveltuvat siksi erinoimaisesti sähkömoottorien kanssa käytettäväksi. Saatavilla myös esiporattuna. HRC kytкимиä on myöskin saatavana palonkestävänä ja antistaattisena.


TEKNISET TIEDOT

TIEDOT

A	69 mm
B	60 mm
C	20 mm
D	23,5 mm
E	31 mm
F	25 mm
G	18 mm
J	29 mm
Koko	70
Taper-lock holkin koko	1008
Onton akselin maksimi halkaisija	25 mm
Maximum bore	25 mm



Speed rpm/min	Coupling Size									
	70	90	110	130	150	180	230	280		
100	0.33	0.84	1.68	3.36	6.28	9.96	20.90	33.00		
200	0.66	1.68	3.36	6.72	12.56	19.92	41.80	66.00		
400	1.32	3.36	6.72	13.44	25.12	39.84	83.60	132.00		
600	1.98	5.04	10.08	20.16	37.68	59.76	125.20	198.00		
800	2.64	6.72	13.44	26.88	50.24	79.68	166.40	264.00		
1000	3.30	8.40	16.80	33.60	62.56	95.52	209.00	330.00		
1200	3.96	10.08	20.16	40.32	75.12	113.76	250.80	396.00		
1400	4.62	11.76	23.52	47.04	87.68	131.52	292.00	462.00		
1600	5.28	13.44	26.88	53.76	100.00	149.00	333.20	528.00		
1800	5.94	15.12	30.24	60.48	112.00	166.40	374.40	594.00		
2000	6.60	16.80	33.60	67.20	124.00	183.84	415.60	660.00		
2200	7.26	18.48	36.96	73.92	136.00	201.28	456.80	726.00		
2400	7.92	20.16	40.32	80.64	148.00	218.72	498.00	792.00		
2600	8.58	21.84	43.68	87.36	160.00	236.16	539.20	858.00		
2800	9.24	23.52	47.04	94.08	172.00	253.60	580.40	924.00		
3000	9.90	25.20	50.40	100.80	184.00	271.04	621.60	990.00		
3600	11.88	30.24	60.48	121.00	220.00					
Nominal Torque (Nm)	315	60	160	315	600	950	2000	3150		
Max Torque (Nm)	72	180	360	720	1500	2350	5000	7200		




PHYSICAL DIMENSIONS AND CHARACTERISTICS


Common Dimensions							Type F & H					Type B				
							Max. Bore					Bore Dia's				
Size	A	B	E	F	G	Bush Size	mm	in.	C	D	J1	Max.	Pilot Hole	Screw Hole	C	D
70	69	31	25.0	18.0	1008	28	1"	25.0	23.5	29	32	8	M 6	20	23.5	
90	85	39	32	30.5	1275	36	1 1/8"	30.5	29	42	40	10	M 8	26	30.5	
110	112	50	45	40.0	1587	42	1 3/4"	40.0	38	55	50	15	M10	31	45.0	
130	130	60	60.0	36.0	1810	42	1 3/4"	60.0	38	60	55	15	M10	39	47.5	
150	150	77	77.0	40.0	2057	50	2	77.0	42	70	65	20	M12	46	56.0	
180	180	105	105.0	40.0	2357	60	2 1/4"	105.0	48	80	75	25	M16	55	70.0	
230	225	150	150.0	50.0	3020	75	3	150.0	55	100	95	30	M12	77	80.0	
280	275	200	199	105.5	3525	100	4	200.0	65	125	120	30	M16	90	105.5	

1" J1 is the wrench clearance required for tightening/loosening the bolt on the shaft. A shortened wrench will allow this dimension to be reduced.
 F, F1 refers to combinations of flanges: FF, FH, HH, FB, HB, BB.
 Bore limits M10 unless otherwise specified.

Size	Assembled Length (L*) Coupling Flange Types				Mass (kg)	Inertia Ix (kgm²)	Dynamic Stiffness (Nm/m)	Maximum Misalignment		Nominal Torque (Nm)
	FF	FH	HH	FB				Parallel	Axial	
70	65.0	65.0	65.0	65.0	1.00	0.00095	-	0.3	+0.2	31
90	85.0	85.0	85.0	85.0	1.78	0.00115	-	0.3	+0.5	60
110	112.0	112.0	112.0	112.0	3.00	0.00140	60	0.3	+0.8	160
130	130.0	130.0	130.0	130.0	5.48	0.00180	120	0.4	+0.8	315
150	150.0	150.0	150.0	150.0	9.50	0.00240	220	0.4	+0.9	600
180	180.0	180.0	180.0	180.0	16.00	0.00340	360	0.4	+1.1	950
230	230.0	230.0	230.0	230.0	26.00	0.00580	560	0.5	+1.3	2000
280	280.0	280.0	280.0	280.0	50.00	0.00950	1020	0.5	+1.7	3150



Speed rpm/min	Coupling Size									
	70	90	110	130	150	180	230	280		
100	0.33	0.84	1.68	3.36	6.28	9.96	20.90	33.00		
200	0.66	1.68	3.36	6.72	12.56	19.92	41.80	66.00		
400	1.32	3.36	6.72	13.44	25.12	39.84	83.60	132.00		
600	1.98	5.04	10.08	20.16	37.68	59.76	125.20	198.00		
800	2.64	6.72	13.44	26.88	50.24	79.68	166.40	264.00		
1000	3.30	8.40	16.80	33.60	62.56	95.52	209.00	330.00		
1200	3.96	10.08	20.16	40.32	75.12	113.76	250.80	396.00		
1400	4.62	11.76	23.52	47.04	87.68	131.52	292.00	462.00		
1600	5.28	13.44	26.88	53.76	100.00	149.00	333.20	528.00		
1800	5.94	15.12	30.24	60.48	112.00	166.40	374.40	594.00		
2000	6.60	16.80	33.60	67.20	124.00	183.84	415.60	660.00		
2200	7.26	18.48	36.96	73.92	136.00	201.28	456.80	726.00		
2400	7.92	20.16	40.32	80.64	148.00	218.72	498.00	792.00		
2600	8.58	21.84	43.68	87.36	160.00	236.16	539.20	858.00		
2800	9.24	23.52	47.04	94.08	172.00	253.60	580.40	924.00		
3000	9.90	25.20	50.40	100.80	184.00	271.04	621.60	990.00		
3600	11.88	30.24	60.48	121.00	220.00					
Nominal Torque (Nm)	315	60	160	315	600	950	2000	3150		
Max Torque (Nm)	72	180	360	720	1500	2350	5000	7200		

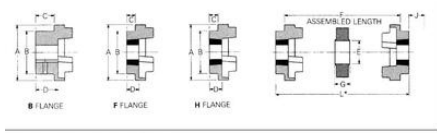

PHYSICAL DIMENSIONS AND CHARACTERISTICS

Common Dimensions							Type F & H					Type B			
							Max. Bore				Bore Dia's				
Size	A	B	E	F	G	Bush Size	mm	in.	C	D	J1	Max.	Pilot Hole	Screw Hole	Cover Key
70	69	31	25.0	18.0	1008	28	1"	25.0	23.5	29	32	8	M 6	20	23.5
90	85	39	32	30.5	1275	36	1 1/8"	30.5	29	42	40	10	M 8	26	30.5
110	112	50	45	40.0	1587	42	1 3/4"	40.0	38	55	50	15	M10	31	45.0
130	130	60	60.0	36.0	1810	42	1 3/4"	60.0	38	60	55	15	M10	39	47.5
150	150	77	77.0	40.0	2057	50	2	77.0	42	70	65	20	M12	46	56.0
180	180	105	105.0	40.0	2357	60	2 1/4"	105.0	48	80	75	25	M16	55	70.0
230	225	150	150.0	50.0	3020	75	3	150.0	55	100	95	30	M12	77	80.0
280	275	200	199	105.5	3525	100	4	200.0	65	125	120	30	M16	90	105.5

1" J1 is the wrench clearance required for tightening/loosening the bolt on the shaft. A shortened wrench will allow this dimension to be reduced.
 F, F1 refers to combinations of flanges: FF, FH, HH, FB, HB, BB.
 Bore limits M10 unless otherwise specified.

Size	Assembled Length (L*) Coupling Flange Types				Mass (kg)	Inertia Ix (kgm²)	Dynamic Stiffness (Nm/m)	Maximum Misalignment		Nominal Torque (Nm)
	FF	FH	HH	FB				Parallel	Axial	
70	65.0	65.0	65.0	65.0	1.00	0.00095	-	0.3	+0.2	31
90	85.0	85.0	85.0	85.0	1.78	0.00115	-	0.3	+0.5	60
110	112.0	112.0	112.0	112.0	3.00	0.00140	60	0.3	+0.8	160
130	130.0	130.0	130.0	130.0	5.48	0.00180	120	0.4	+0.8	315
150	150.0	150.0	150.0	150.0	9.50	0.00240	220	0.4	+0.9	600
180	180.0	180.0	180.0	180.0	16.00	0.00340	360	0.4	+1.1	950
230	230.0	230.0	230.0	230.0	26.00	0.00580	560	0.5	+1.3	2000
280	280.0	280.0	280.0	280.0	50.00	0.00950	1020	0.5	+1.7	3150