OEM Finland Oy | Puh: 0207 499 499 | info@oem.fi | www.oem.fi
PL 9, 20101 TURKU

P16-KARAMOOTTORI

Pieni karamoottori

P16-50-22-12-S
P16-50-22-12-S karamoottori



- 12VDC
- 250N
- 20% käyttöaste
- IP54
- Isku 50-200mm

TUOTEKUVAUS

Actuonix Motion Devices valmistaa kompakteja ja pieniä karamoottoreita.


P16 sarja on monipuolinen perusominaiksuuksiltaan ja lisävarusteena on saatavana potentiometri ja päätyrajakytkimet.

TEKNISET TIEDOT

IP-luokka	IP54
Iskun pituus	50 mm
Käyttöjännite	12 V DC
Käyttösykli	20 %
Max. käyttölämpötila	50 °C
Max. työntövoima	50 N
Min. käyttölämpötila	-10 °C
Nimellisnopeus, ei kuormaa	46 mm/s
Paino	95 g
Pitovoima	75 N
Välityssuhde	22:1
Äänenpaine	62 dB


P16-SS-GG-VV-C

Feature	*Options*
SS: Stroke	**50, 100, 150,200** (mm)
GG: Gear reduction ratio (refer to load curves above)	**22, 64, 256** :1 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**12** Volts DC
C: Controller	**P** Potentiometer Feedback **S** Limit Switches

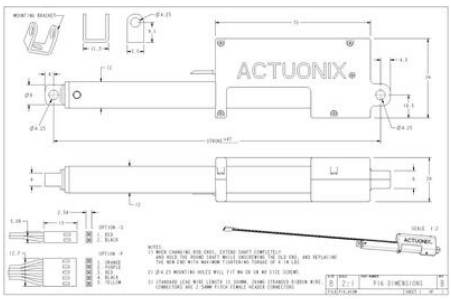

P16-SS-GG-VV-C

Feature	*Options*
SS: Stroke	**50, 100, 150,200** (mm)
GG: Gear reduction ratio (refer to load curves above)	**22, 64, 256** :1 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**12** Volts DC
C: Controller	**P** Potentiometer Feedback **S** Limit Switches

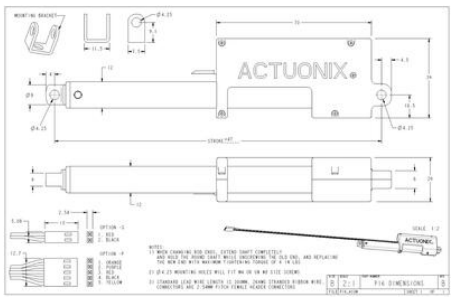
MOUNTING BRACKET
ACTUONIX
STROKE**
OPTION -S
1. RED
2. BLACK
OPTION -P
1. ORANGE
2. PURPLE
3. RED
4. BLACK
5. YELLOW
NOTES:
1) WHEN CHANGING ROD END, ENTIRE SHAFT COMPLETELY
MUST BE USED. THE ORIGINAL SHAFT MUST UNSCREWING THE OLD END, AND REPLACING
THE NEW END WITH MAXIMUM TIGHTENING TORQUE OF 0.1N.M.
2) Ø4.25 MOUNTING HOLES WILL FIT M4 OR UNC #8 SIZE SCREWS.
3) STANDARD LEAD WIRE LENGTH IS 300MM. 28AWG STRANDED RIBBON WIRE.
CONNECTORS ARE 2.54MM PITCH FEMALE HEADER CONNECTORS
SCALE: 1:2
SIZE: B
SCALE: 2:1
DWG NAME: P16 DIMENSIONS
REV: B
TITLE/LOCATION
SHEET 1 OF 1