

## HRC KYTKIMET

Sähkömoottoreihin

HRC 150 H

Kytin H taper-lock kiinnityksellä

- Helppo ja nopea asennus
- Saatavana myöskin antistaattisena
- Erinomainen suorituskyky edullisesti




### TUOTEKUVAUS

HRC kytimet ovat joustavia ja ne on helppo ja nopea asentaa paikalleen, esimerkiksi Taper-Lock -holkeilla. Ne soveltuvat siksi erinoimaisesti sähkömoottorien kanssa käytettäväksi. Saatavilla myös esiporattuna. HRC kytimiä on myöskin saatavana palonkestävänä ja antistaattisena.


## TEKNISET TIEDOT

### TIEDOT

|                                  |         |
|----------------------------------|---------|
| A                                | 150 mm  |
| B                                | 115 mm  |
| C                                | 23,5 mm |
| D                                | 33,5 mm |
| E                                | 62 mm   |
| F                                | 60 mm   |
| G                                | 40 mm   |
| J                                | 42 mm   |
| Koko                             | 150     |
| Taper-lock holkin koko           | 2012    |
| Onton akselin maksimi halkaisija | 50 mm   |
| Maximum bore                     | 50 mm   |



| Speed<br>rpm/min    | Coupling Size |       |       |        |        |        |        |        |  |  |
|---------------------|---------------|-------|-------|--------|--------|--------|--------|--------|--|--|
|                     | 70            | 90    | 110   | 130    | 150    | 180    | 230    | 280    |  |  |
| 100                 | 0.33          | 0.84  | 1.68  | 3.36   | 6.28   | 9.96   | 20.90  | 33.00  |  |  |
| 200                 | 0.66          | 1.68  | 3.36  | 6.72   | 12.56  | 19.92  | 41.80  | 66.00  |  |  |
| 400                 | 1.32          | 3.36  | 6.72  | 13.44  | 25.12  | 39.84  | 83.60  | 132.00 |  |  |
| 600                 | 1.98          | 5.04  | 10.08 | 20.16  | 37.68  | 59.76  | 125.40 | 198.00 |  |  |
| 800                 | 2.64          | 6.72  | 13.44 | 26.88  | 50.24  | 79.68  | 167.20 | 264.00 |  |  |
| 1000                | 3.30          | 8.40  | 16.80 | 33.60  | 62.56  | 95.52  | 209.00 | 330.00 |  |  |
| 1200                | 3.96          | 10.08 | 20.16 | 40.32  | 75.12  | 113.76 | 250.80 | 396.00 |  |  |
| 1400                | 4.62          | 11.76 | 23.52 | 47.04  | 87.68  | 131.52 | 292.60 | 462.00 |  |  |
| 1600                | 5.28          | 13.44 | 26.88 | 53.76  | 100.00 | 149.00 | 334.40 | 528.00 |  |  |
| 1800                | 5.94          | 15.12 | 30.24 | 60.48  | 112.00 | 166.40 | 376.20 | 594.00 |  |  |
| 2000                | 6.60          | 16.80 | 33.60 | 67.20  | 124.00 | 183.80 | 418.00 | 660.00 |  |  |
| 2200                | 7.26          | 18.48 | 36.96 | 73.92  | 136.00 | 201.20 | 459.80 | 726.00 |  |  |
| 2400                | 7.92          | 20.16 | 40.32 | 80.64  | 148.00 | 218.60 | 501.60 | 792.00 |  |  |
| 2600                | 8.58          | 21.84 | 43.68 | 87.36  | 160.00 | 236.00 | 543.40 | 858.00 |  |  |
| 2800                | 9.24          | 23.52 | 47.04 | 94.08  | 172.00 | 253.40 | 585.20 | 924.00 |  |  |
| 3000                | 9.90          | 25.20 | 50.40 | 100.80 | 184.00 | 270.80 | 627.00 | 990.00 |  |  |
| 3600                | 11.88         | 30.24 | 60.48 | 121.00 | 220.00 |        |        |        |  |  |
| Nominal Torque (Nm) | 315           | 60    | 160   | 315    | 600    | 950    | 2000   | 3150   |  |  |
| Max Torque (Nm)     | 72            | 180   | 360   | 720    | 1500   | 2350   | 5000   | 7200   |  |  |




# PHYSICAL DIMENSIONS AND CHARACTERISTICS


| Common Dimensions |     |     |      |       |      |           | Type F & H |        |       |      |    | Type B     |            |            |       |       |
|-------------------|-----|-----|------|-------|------|-----------|------------|--------|-------|------|----|------------|------------|------------|-------|-------|
|                   |     |     |      |       |      |           | Max. Bore  |        |       |      |    | Bore Dia's |            |            |       |       |
| Size              | A   | B   | E    | F     | G    | Bush Size | mm         | in.    | C     | D    | J1 | Max.       | Pilot Hole | Screw Hole | C     | D     |
| 70                | 69  | 31  | 25.0 | 18.0  | 1008 | 28        | 1"         | 25.0   | 23.5  | 29   | 32 | 8          | M 6        | 20         | 23.5  |       |
| 90                | 85  | 39  | 32   | 30.5  | 1275 | 36        | 1 1/8"     | 30.5   | 29    | 42   | 40 | 10         | M 6        | 26         | 30.5  |       |
| 110               | 112 | 50  | 45   | 40.0  | 1600 | 42        | 1 1/2"     | 40.0   | 38    | 55   | 50 | 15         | M10        | 31         | 45.0  |       |
| 130               | 130 | 60  | 60.0 | 36.0  | 1810 | 42        | 1 1/2"     | 60.0   | 38    | 60   | 55 | 15         | M10        | 39         | 47.5  |       |
| 150               | 150 | 70  | 60.0 | 40.0  | 2032 | 50        | 2"         | 60.0   | 38    | 70   | 65 | 20         | M12        | 46         | 56.0  |       |
| 180               | 180 | 85  | 77   | 73.0  | 49.0 | 2517      | 60         | 2 1/4" | 85.0  | 68.5 | 48 | 25         | M12        | 57         | 77.0  |       |
| 230               | 225 | 105 | 95   | 85.0  | 58.0 | 3250      | 75         | 3"     | 105.0 | 85.0 | 65 | 30         | M16        | 77         | 105.0 |       |
| 280               | 275 | 200 | 119  | 105.5 | 30.5 | 3525      | 100        | 4"     | 110   | 66.5 | 48 | 115        | 30         | M16        | 90    | 105.5 |

1" J1 is the wrench clearance required for tightening/loosening the bolt on the shaft. A shortened wrench will allow this dimension to be reduced.  
 1" F refers to combinations of flanges: FF, FH, HH, FB, HB, BB.  
 Bore limits M10 unless otherwise specified.

| Size | Assembled Length (L*)<br>Coupling Flange Types |       |       |       | Mass<br>(kg) | Inertia Ix<br>(kgm²) | Dynamic<br>Stiffness<br>(Nm/m) | Maximum<br>Misalignment |       | Nominal<br>Torque<br>(Nm) |
|------|------------------------------------------------|-------|-------|-------|--------------|----------------------|--------------------------------|-------------------------|-------|---------------------------|
|      | FF                                             | FH    | HH    | FB    |              |                      |                                | Parallel                | Axial |                           |
| 70   | 65.0                                           | 65.0  | 65.0  | 65.0  | 1.00         | 0.00095              | -                              | 0.3                     | +0.2  | 31                        |
| 90   | 85.0                                           | 85.0  | 85.0  | 85.0  | 1.78         | 0.00115              | -                              | 0.3                     | +0.5  | 60                        |
| 110  | 112.0                                          | 112.0 | 112.0 | 112.0 | 3.00         | 0.00140              | 60                             | 0.3                     | +0.8  | 160                       |
| 130  | 130.0                                          | 130.0 | 130.0 | 130.0 | 5.48         | 0.00180              | 120                            | 0.4                     | +0.8  | 315                       |
| 150  | 150.0                                          | 150.0 | 150.0 | 150.0 | 9.50         | 0.00240              | 220                            | 0.4                     | +0.9  | 600                       |
| 180  | 180.0                                          | 180.0 | 180.0 | 180.0 | 16.00        | 0.00340              | 360                            | 0.4                     | +1.1  | 950                       |
| 230  | 225.0                                          | 225.0 | 225.0 | 225.0 | 26.00        | 0.00580              | 580                            | 0.5                     | +1.3  | 2000                      |
| 280  | 275.0                                          | 275.0 | 275.0 | 275.0 | 50.00        | 0.00950              | 950                            | 0.5                     | +1.7  | 3150                      |



| Speed<br>rpm/min    | Coupling Size |       |       |        |        |        |        |        |  |  |
|---------------------|---------------|-------|-------|--------|--------|--------|--------|--------|--|--|
|                     | 70            | 90    | 110   | 130    | 150    | 180    | 230    | 280    |  |  |
| 100                 | 0.33          | 0.84  | 1.68  | 3.36   | 6.28   | 9.96   | 20.90  | 33.00  |  |  |
| 200                 | 0.66          | 1.68  | 3.36  | 6.72   | 12.56  | 19.92  | 41.80  | 66.00  |  |  |
| 400                 | 1.32          | 3.36  | 6.72  | 13.44  | 25.12  | 39.84  | 83.60  | 132.00 |  |  |
| 600                 | 1.98          | 5.04  | 10.08 | 20.16  | 37.68  | 59.76  | 125.40 | 198.00 |  |  |
| 800                 | 2.64          | 6.72  | 13.44 | 26.88  | 50.24  | 79.68  | 167.20 | 264.00 |  |  |
| 1000                | 3.30          | 8.40  | 16.80 | 33.60  | 62.56  | 95.52  | 209.00 | 330.00 |  |  |
| 1200                | 3.96          | 10.08 | 20.16 | 40.32  | 75.12  | 113.76 | 250.80 | 396.00 |  |  |
| 1400                | 4.62          | 11.76 | 23.52 | 47.04  | 87.68  | 131.52 | 292.60 | 462.00 |  |  |
| 1600                | 5.28          | 13.44 | 26.88 | 53.76  | 100.00 | 149.00 | 334.40 | 528.00 |  |  |
| 1800                | 5.94          | 15.12 | 30.24 | 60.48  | 112.00 | 166.40 | 376.20 | 594.00 |  |  |
| 2000                | 6.60          | 16.80 | 33.60 | 67.20  | 124.00 | 183.80 | 418.00 | 660.00 |  |  |
| 2200                | 7.26          | 18.48 | 36.96 | 73.92  | 136.00 | 201.20 | 459.80 | 726.00 |  |  |
| 2400                | 7.92          | 20.16 | 40.32 | 80.64  | 148.00 | 218.60 | 501.60 | 792.00 |  |  |
| 2600                | 8.58          | 21.84 | 43.68 | 87.36  | 160.00 | 236.00 | 543.40 | 858.00 |  |  |
| 2800                | 9.24          | 23.52 | 47.04 | 94.08  | 172.00 | 253.40 | 585.20 | 924.00 |  |  |
| 3000                | 9.90          | 25.20 | 50.40 | 100.80 | 184.00 | 270.80 | 627.00 | 990.00 |  |  |
| 3600                | 11.88         | 30.24 | 60.48 | 121.00 | 220.00 |        |        |        |  |  |
| Nominal Torque (Nm) | 315           | 60    | 160   | 315    | 600    | 950    | 2000   | 3150   |  |  |
| Max Torque (Nm)     | 72            | 180   | 360   | 720    | 1500   | 2350   | 5000   | 7200   |  |  |

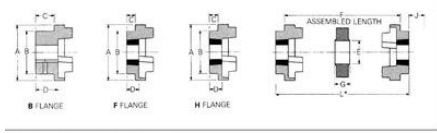

# PHYSICAL DIMENSIONS AND CHARACTERISTICS

| Common Dimensions |     |     |       |       |      |           | Type F & H |       |      |     |            | Type B |            |            |           |
|-------------------|-----|-----|-------|-------|------|-----------|------------|-------|------|-----|------------|--------|------------|------------|-----------|
|                   |     |     |       |       |      |           | Max. Bore  |       |      |     | Bore Dia's |        |            |            |           |
| Size              | A   | B   | E     | F     | G    | Bush Size | mm         | in.   | C    | D   | J1         | Max.   | Pilot Hole | Screw Hole | Cover Key |
| 70                | 69  | 31  | 25.0  | 18.0  | 1008 | 28        | 1"         | 25.0  | 23.5 | 29  | 32         | 8      | M 6        | 20         | 23.5      |
| 90                | 85  | 39  | 32    | 30.5  | 1275 | 36        | 1 1/8"     | 30.5  | 29   | 42  | 40         | 10     | M 6        | 26         | 30.5      |
| 110               | 112 | 50  | 45    | 40.0  | 1600 | 42        | 1 1/2"     | 40.0  | 38   | 55  | 50         | 15     | M10        | 31         | 45.0      |
| 130               | 130 | 60  | 60.0  | 36.0  | 1810 | 42        | 1 1/2"     | 60.0  | 38   | 60  | 55         | 15     | M10        | 39         | 47.5      |
| 150               | 150 | 70  | 60.0  | 40.0  | 2032 | 50        | 2"         | 60.0  | 38   | 70  | 65         | 20     | M12        | 46         | 56.0      |
| 180               | 180 | 85  | 85.0  | 40.0  | 2300 | 50        | 2"         | 85.0  | 48   | 80  | 75         | 25     | M12        | 55         | 60.0      |
| 230               | 225 | 105 | 105.0 | 50.0  | 2668 | 75        | 3"         | 105.0 | 55   | 100 | 95         | 30     | M16        | 77         | 105.0     |
| 280               | 275 | 200 | 119   | 105.5 | 3025 | 100       | 4"         | 110   | 66.5 | 115 | 110        | 30     | M16        | 90         | 105.5     |

1" J1 is the wrench clearance required for tightening/loosening the bolt on the shaft. A shortened wrench will allow this dimension to be reduced.  
 1" F refers to combinations of flanges: FF, FH, HH, FB, HB, BB.  
 Bore limits M10 unless otherwise specified.

| Size | Assembled Length (L*)<br>Coupling Flange Types |       |       |       | Mass<br>(kg) | Inertia Ix<br>(kgm²) | Dynamic<br>Stiffness<br>(Nm/m) | Maximum<br>Misalignment |       | Nominal<br>Torque<br>(Nm) |
|------|------------------------------------------------|-------|-------|-------|--------------|----------------------|--------------------------------|-------------------------|-------|---------------------------|
|      | FF                                             | FH    | HH    | FB    |              |                      |                                | Parallel                | Axial |                           |
| 70   | 65.0                                           | 65.0  | 65.0  | 65.0  | 1.00         | 0.00095              | -                              | 0.3                     | +0.2  | 31                        |
| 90   | 85.0                                           | 85.0  | 85.0  | 85.0  | 1.78         | 0.00115              | -                              | 0.3                     | +0.5  | 60                        |
| 110  | 112.0                                          | 112.0 | 112.0 | 112.0 | 3.00         | 0.00140              | 60                             | 0.3                     | +0.8  | 160                       |
| 130  | 130.0                                          | 130.0 | 130.0 | 130.0 | 5.48         | 0.00180              | 120                            | 0.4                     | +0.8  | 315                       |
| 150  | 150.0                                          | 150.0 | 150.0 | 150.0 | 9.50         | 0.00240              | 220                            | 0.4                     | +0.9  | 600                       |
| 180  | 180.0                                          | 180.0 | 180.0 | 180.0 | 16.00        | 0.00340              | 360                            | 0.4                     | +1.1  | 950                       |
| 230  | 225.0                                          | 225.0 | 225.0 | 225.0 | 26.00        | 0.00580              | 580                            | 0.5                     | +1.3  | 2000                      |
| 280  | 275.0                                          | 275.0 | 275.0 | 275.0 | 50.00        | 0.00950              | 950                            | 0.5                     | +1.7  | 3150                      |