

JOYSTICK Ø22,5 MM

LMV2A

Joystick 3-asentoa palautuva KM-kytkin

- IP65
- 1 nopeus/suunta
- Palautuva tai lukkiutuva toiminto
- Tahattoman käytön estomekanismi, ns. kuolleen miehen kytkin



TUOTEKUVAUS

Joystick-ohjainsauvoja on saatavana kahteen tai neljään suuntaan liikkuvana. Sauvassa voi olla mekanismi joka estää tahattoman liikkeen, ns. "kuolleen miehen" -toiminto. Ohjainsauvassa käytetään erityisiä kosketinyksiköitä, jotka eivät ole yhteensopivia muihin Baco ohjauskalusteisiin. 3-asentoisessa ohjaimessa tarvitaan yksi kosketinyksikkö ja 5-asentoisessa kaksi yksikköä.

TEKNISET TIEDOT


YLEISTÄ

Asentojen määrä	3
Toiminta	Palautuva

MUUTA

IP-luokka	IP65
Suojausluokka	II
Min. käyttölämpötila	-25 °C
Max. käyttölämpötila	70 °C
Min. varastointilämpötila	-40 °C
Max. varastointilämpötila	70 °C
Ilmastollinen kestävyys, jatkuva kostea lämpö	IEC 60068-2-30
Ilmastollinen kestävyys, meri-ilman kestävyys	IEC 60068-2-52
Ilmastollinen kestävyys, syklinen kostea lämpö	IEC 60068-2-3

Återfjädrande funktion 3-läges

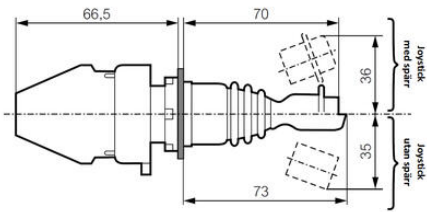

Kontaktfunktion 3-läges joystick

			A	O	B
LM11	13		14	X	
	11		12		X
LM11	23		24		X
	21		22	X	

MECHANICAL OPERATION - JOYSTICKS

For Joysticks

2 position

Two Push Cap (M1) - Standard with Switch Head				
Wire in Cap location	Terminal Numbers	Position		
		A	O	B
1	2-4	X	O	O
	1-2	O	O	X
2	2-4	O	O	X
	1-2	X	O	O

4 position

Two block clip (M1) - standard with service head					
Wires in Clip location	Terminal Number	Position			
		A	B	C	D
Y	24	O	O	O	X
	12	O	O	O	X
Z	24	O	X	O	O
	12	X	O	O	O

2 position

Wires in Circuit Location	Terminal Numbers	Position		
		A	0	B
1	2-6	X	0	0
	1-2	0	0	X
2	2-6	0	0	X
	1-2	X	0	0
3	2-6	X	0	0
	1-2	0	0	X
4	2-6	0	0	X
	1-2	X	0	0

4 position

Wire in Circuit location	Terminal Number	Position			
		A	B	C	D
1	24 12	O O	O O	O O	X X
	24 12	O X	X O	O O	O O
3	24 12	O O	O O	O O	X X
	24 12	O X	X O	O O	O O

MECHANICAL OPERATION - JOYSTICKS

For Joysticks

2 position

Two-subc clip [ME3 - STANDARD WITH JOYSTICK HEAD]				
Wire in Clip location	Terminal Numbers	Position A O B		
1	2-4	X	O	O
	1-1	O	O	X
2	2-4	O	O	X
	1-1	X	O	O

4 position

PUSH BUTTON CAP (M1) - STANDARD WITH SWITCH HEAD					
Wires in Circuit Location	Terminal Number	Position			
		A	B	C	D
1	24	○	○	○	○
	12	○	○	○	○
2	24	○	○	○	○
	12	○	○	○	○

2 position

Wire in (Circuit Location)	Terminal Number	Position		
		A	0	B
1	2-4	X	0	0
	1-2	0	0	X
2	2-4	0	0	X
	1-2	X	0	0
3	2-4	X	0	0
	1-2	0	0	X
4	2-4	0	0	X
	1-2	X	0	0

4 position

Wire in Circuit location	Terminal Number	Position					
		A	B	C	D	E	F
1	24	O	O	O	O	X	O
	12	O	O	O	X	O	O
2	24	O	X	O	O	O	O
	12	X	O	O	O	O	O
3	24	O	O	O	O	X	O
	12	O	O	O	X	O	O
4	24	O	X	O	O	O	O
	12	X	O	O	O	O	O