

JOYSTICK Ø22,5 MM

LMV2F

Joystick 3-asentoa lukkiutuva KM-kytkin

- IP65
- 1 nopeus/suunta
- Palautuva tai lukkiutuva toiminto
- Tahattoman käytön estomekanismi, ns. kuolleen miehen kytkin



TUOTEKUVAUS

Joystick-ohjainsauvoja on saatavana kahteen tai neljään suuntaan liikkuvana. Sauvassa voi olla mekanismi joka estää tahattoman liikkeen, ns. "kuolleen miehen" -toiminto. Ohjainsauvassa käytetään erityisiä kosketinyksiköitä, jotka eivät ole yhteensopivia muihin Baco ohjauskalusteisiin. 3-asentoisessa ohjaimessa tarvitaan yksi kosketinyksikkö ja 5-asentoisessa kaksi yksikköä.

TEKNISET TIEDOT

YLEISTÄ


Asentojen määrä	3
Toiminta	Pysyvä

MUUTA

IP-luokka	IP65
Suojausluokka	II
Min. käyttölämpötila	-25 °C
Max. käyttölämpötila	70 °C
Min. varastointilämpötila	-40 °C
Max. varastointilämpötila	70 °C
Ilmastollinen kestävyys, jatkuva kostea lämpö	IEC 60068-2-30
Ilmastollinen kestävyys, meri-ilman kestävyys	IEC 60068-2-52
Ilmastollinen kestävyys, syklinen kostea lämpö	IEC 60068-2-3

Kvarstående funktion 3-läges

A — 0 — B

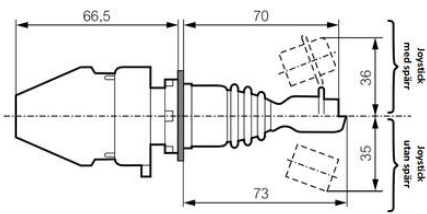

Kontaktfunktion 3-läges joystick

			A	O	B
LM11	13		14	X	
	11		12		X
LM11	23		24		X
	21		22	X	

MECHANICAL OPERATION - JOYSTICKS

For Joysticks

2 position

Joystick with stop (JMS) - standard with service reset			
Letter in Circuit Location	Terminal Number	Position	
		A	B
1	24	O	O
1	12	O	X

4 position

Two Block Clip (JMS) - Standard with Service Head						
LM in Clip Location	Terminal Number	Position				
		A	B	C	D	
Y	2-4	O	O	O	O	X
	1-2	O	O	O	X	O
Z	2-4	O	X	O	O	O
	1-2	X	O	O	O	O

Joystick with stop (JMS)

Letter in Circuit Location	Terminal Number	Position	
		A	B
1	24	X	O
1	12	O	X

Joystick with stop (JMS)

Letter in Circuit Location	Terminal Number	Position			
		A	B	C	D
1	24	O	O	O	X
1	12	O	O	X	O

MECHANICAL OPERATION - JOYSTICKS

For Joysticks

2 position

Joystick with stop (JMS) - standard with service reset			
Letter in Circuit Location	Terminal Number	Position	
		A	B
1	24	X	O
1	12	O	X

4 position

Two-Block Clip (JMS) - Standard With Service Head					
Letter in Clip Location	Terminal Number	Position			
		A	B	C	D
Y	2-4	○	○	○	○ X
	1-3	○	○	○	X ○
Z	2-4	○	X	○	○ ○
	1-3	X	○	○	○ ○

Joystick with stop (JMS)

Letter in Circuit Location	Terminal Number	Position	
		A	B
1	24	X	O
1	12	O	X

Joystick with stop (JMS)

Letter in Circuit Location	Terminal Number	Position			
		A	B	C	D
1	24	O	O	O	X
1	12	O	O	X	O