


MIKROKYTKIN V4

Pienoismikrokytkin

83170902

Mikrokytkin V4, pieni virta, herkkä kytkentävoima, W2

- 0,1-10 A/250 V AC
- Min. virta 1 mA 4 V DC
- Myös sienipainikkeella
- Toimivarsi voidaan asentaa molempiin päihin

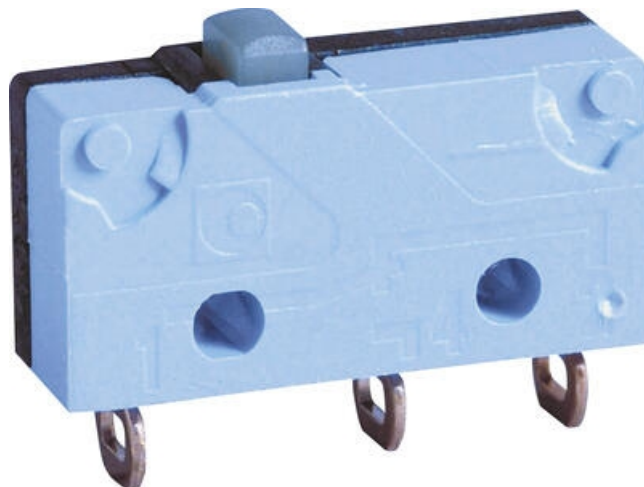

TUOTEKUVAUS

Standardien EN 61058 ja UL 1054 mukainen.

Valittavana toimipäitä 2 mahdollisella kiinnitysasennolla.

TEKNISET TIEDOT

TIEDOT

Koskettimet	Vaihtokosketin
IP-luokka	IP40
Liitäntä	W2
Max. jännite AC	250 V
Min. jännite	4 V
Min. virta	0,001 A
Nimellisvirta 250 V AC	5 A
Nimellisvirta, 250 V AC	6 A
Min. käyttölämpötila	-40 °C
Max. käyttölämpötila	125 °C
Max. käyttövoima	1 N
Max. lepoasento	9,2 mm
Max. ohjausvoima	0,6 N
Min. jälkiliikevoima	0,5 mm
Min. paluuliikkeen voima	0,1 N
Max. hystereesi	0,15 mm

Max. jälkiliikevoima


10 N

KytKentäpiste


8,4 ±0,3 mm

Kontaktiväli


0,4 mm

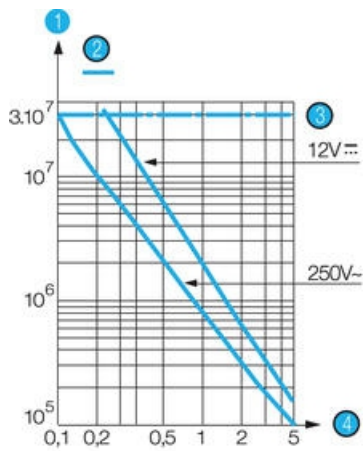

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

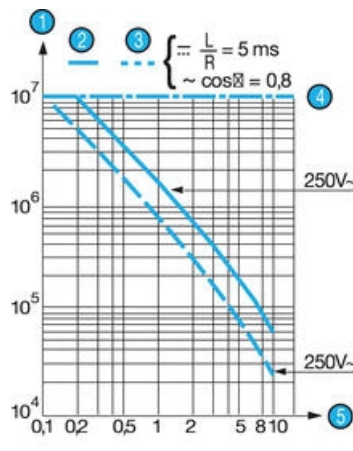

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

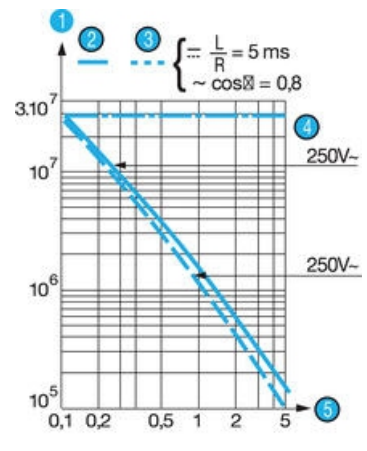

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




W2

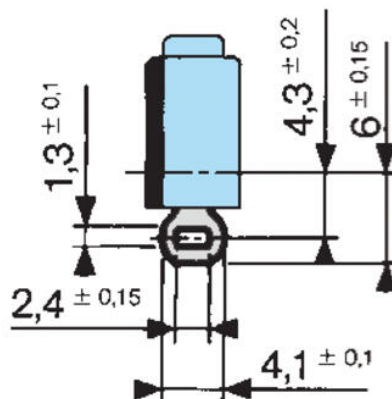


83 170

Asymmetric version

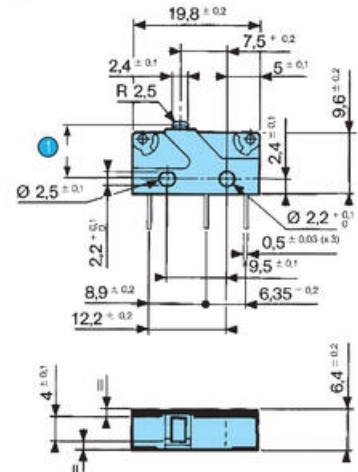


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

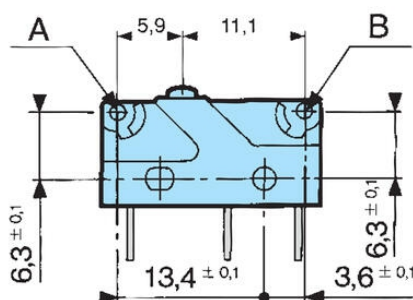


W2




W7A5




X1 - X1S




X2 - X2S





X3 - X3S



83 170 Symmetrical version


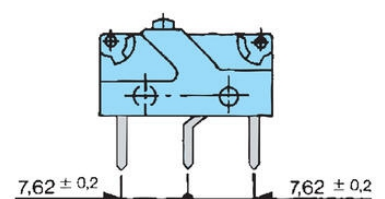


170 E
Arm with roll

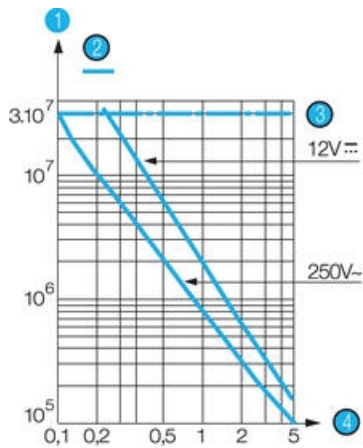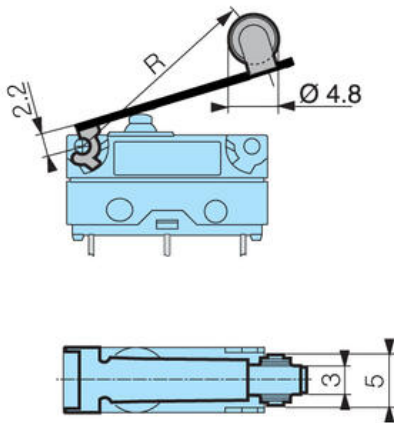



- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 A
Straight-arm

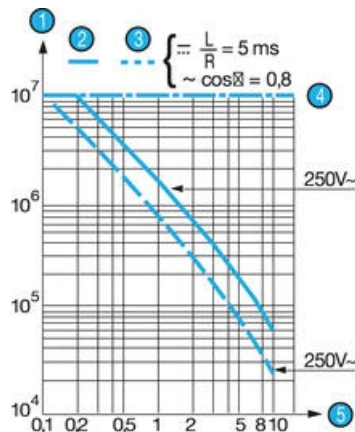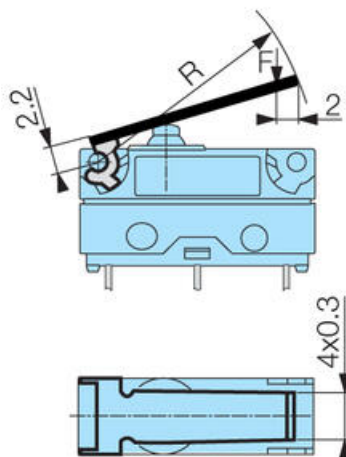

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

170 F
Arm with simulated scroll

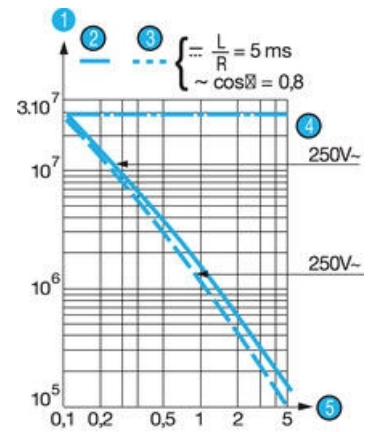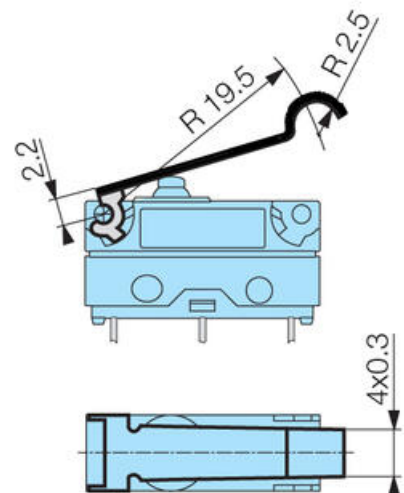

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Electrical function

Partially




Breaking



Conclusion




83 170
Asymmetric version

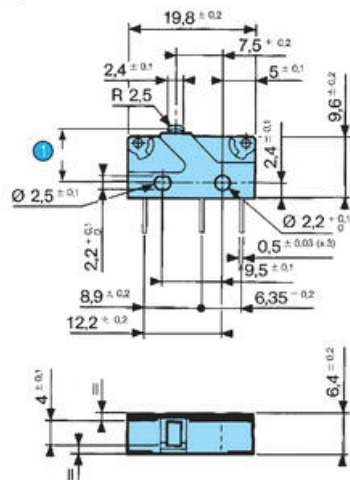


1 OL = 7.6


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

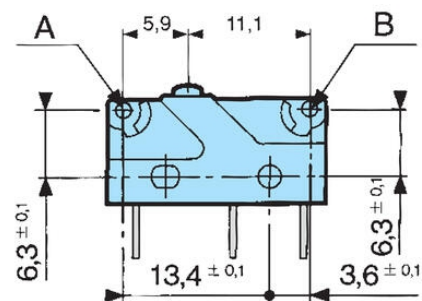


W2




W7A5




X1 - X1S




83 170 Symmetrical version

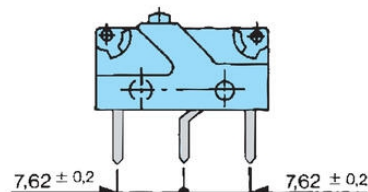



X2 - X2S




X3 - X3S



170 E
Arm with roll

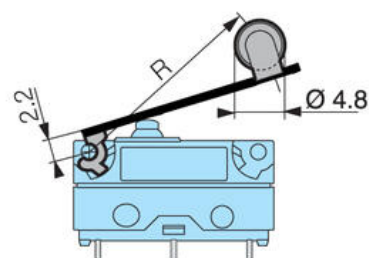

170 A
Straight-arm

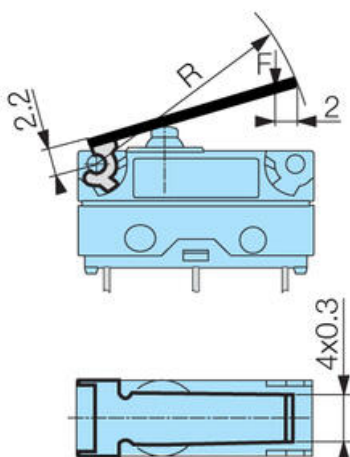

170 F
Arm with simulated scroll

