

AS58 CANOPEN-ANTURI

CanOpen

AMC59-1314CB15RM

Canopen, monikrs, reikä, M12-liitin

- CanOpen ulostulo
- 58mm, akseli- tai reikämalli
- Yksi- (18-bit) tai monikierros (16x14-bit)
- IP65
- M12-liittimellä



TUOTEKUVAUS

LIKAn 58 mm CanOpen-anturi on valittavissa joko akseli- tai reikämallisena. Valikoimassa on myös muita väyliä saatavilla, kysy näistä tarkemmin.

TEKNISEET TIEDOT

TIEDOT

Anturin tyyppi	Absoluuttianturi
Kotelon halkaisija	58 mm
Akselin halkaisija	15 mm
Resoluutio	13x14-bit
Liitäntä	M12-liitin
IP-luokka	IP65
Max. pyörimisnopeus	6000 rpm
Min. syöttöjännite DC	10 V DC
Max. syöttöjännite DC	30 V DC
Min. käyttölämpötila	-25 °C
Max. käyttölämpötila	85 °C
Ulostulo	CANopen
Versio	Monikierros

DIP A = BAUD RATE
Default = 1101 = 500Kbit/s, binary value

ON

2	3	4
1	3	4

LSB MSB ON / OFF

DIP B = NODE-ID
Default = 00000001, binary value

ON

2	3	4	5	6	7	8
1						

LSB OFF MSB Not used




RT BUS TERMINATION

ON

1	2
1	2

1 = 2 = ON (first or last device in the network)
1 = 2 = OFF

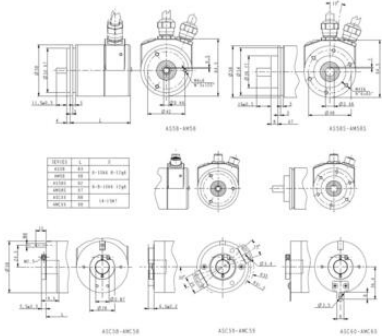

Electrical connection			
Description	Symbol	M12 5-pin	
CAN Shield	PG	1, orange	
+15VDC ± 5%	V+	2	
0VDC	0V	3	
CAN HIGH	HD	4	
CAN LOW	LD	5	

1 Connect the cable shield to the cable gland.
2 CAN signals (V+ referenced, 0V not connected to 0VDC supply voltage.

Connector type
Frontal view, A coding
ISO 15717-1
ISO 15717-1



DIP A = BAUD RATE
Default = 1101 = 500Kbit/s, binary value

ON

2	3	4
1	3	4

LSB MSB ON / OFF

DIP B = NODE-ID
Default = 00000001, binary value

ON

2	3	4	5	6	7	8
1						

LSB OFF MSB Not used




RT BUS TERMINATION

ON

1	2
1	2

1 = 2 = ON (first or last device in the network)
1 = 2 = OFF

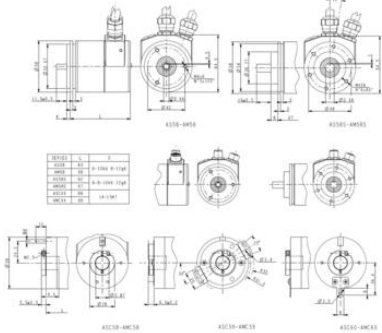

Electrical connection			
Description	Symbol	M12 5-pin	
CAN Shield	PG	1, orange	
+15VDC ± 5%	V+	2	
0VDC	0V	3	
CAN HIGH	HD	4	
CAN LOW	LD	5	

1 Connect the cable shield to the cable gland.
2 CAN signals (V+ referenced, 0V not connected to 0VDC supply voltage.

Connector type
Frontal view, A coding
ISO 15717-1
ISO 15717-1

