OEM Finland Oy | Puh: 0207 499 499 | info@oem.fi | www.oem.fi
PL 9, 20101 TURKU

L12-KARAMOOTTORI

Pieni karamoottori

L12-10-50-12-S
Karamoottori



- 6/12 VDC
- 80N
- 20% käyttöaste
- IP54
- Isku 10-100mm

TUOTEKUVAUS


Actuonix Motion Devices valmistaa kompakteja ja pieniä karamoottoreita.
L12 sarja on monipuolinen perusominaiksuuksiltaan ja lisävarusteena on saatavana potentiometri ja päätyrajakytkimet.

TEKNISET TIEDOT

IP-luokka	IP54
Iskun pituus	10 mm
Käyttöjännite	12 V DC
Käyttösykli	20 %
Max. käyttölämpötila	50 °C
Max. työntövoima	22 N
Max. vetovoima	22 N
Min. käyttölämpötila	-10 °C
Nimellisnopeus, ei kuormaa	25 mm/s
Paino	28 g
Pitovoima	12 N
Välityssuhde	50:1
Äänenpaine	55 dB

L12-SS-GG-VV-C

feature	*Options*
SS: Stroke Length	**10, 30, 50, 100**
GG: Gear reduction ratio (refer to load curves above)	**50, 100, 210** (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**6, 12** (DC volts)
C: Controller	**S** Limit Switches **P** Potentiometer Feedback **I** Integrated Controller **R** RC Servo Integrated Controller

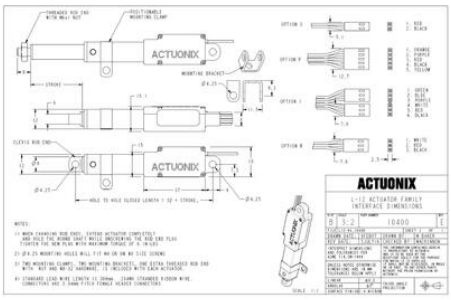

L12-SS-GG-VV-C

feature	*Options*
SS: Stroke Length	**10, 30, 50, 100**
GG: Gear reduction ratio (refer to load curves above)	**50, 100, 210** (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**6, 12** (DC volts)
C: Controller	**S** Limit Switches **P** Potentiometer Feedback **I** Integrated Controller **R** RC Servo Integrated Controller

