



OEM Finland Oy | Puh: 0207 499 499 | info@oem.fi | www.oem.fi
PL 9, 20101 TURKU



L12-KARAMOOTTORI

Pieni karamoottori

L12-30-210-6-R
Karamoottori

- 6/12 VDC
- 80N
- 20% käyttöaste
- IP54
- Isku 10-100mm



TUOTEKUVAUS

Actuonix Motion Devices valmistaa kompakteja ja pieniä karamoottoreita.


L12 sarja on monipuolinen perusominaisuuksiltaan ja lisävarusteena on saatavana potentiometri ja päätyrajakytkimet.

TEKNISET TIEDOT

IP-luokka	IP54
Iskun pituus	30 mm
Jännite DC	6 V
Käyttösykli	20 %
Max. käyttölämpötila	50 °C
Max. vetovoima	80 N
Min. käyttölämpötila	-10 °C
Nimellisa nopeus, ei kuormaa	6,5 mm/s
Pitovoima	45 N
Välityssuhde	210:1
Äänenpaine	55 dB

L12-SS-GG-VV-C

feature	Options
SS: Stroke Length	10, 30, 50, 100
GG: Gear reduction ratio (refer to load curves above)	50, 100, 210 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	6, 12 (DC volts)
C: Controller	S Limit Switches P Potentiometer Feedback I Integrated Controller R RC Servo Integrated Controller

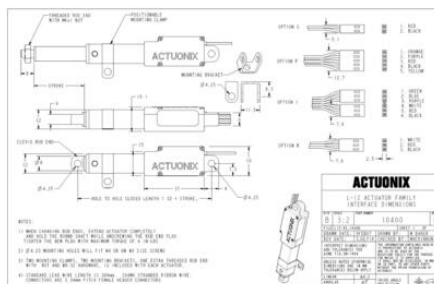

L12-SS-GG-VV-C

feature	Options
SS: Stroke Length	10, 30, 50, 100
GG: Gear reduction ratio (refer to load curves above)	50, 100, 210 (lower ratios are faster but push less force, and vice versa)
VV: Voltage	6, 12 (DC volts)
C: Controller	S Limit Switches P Potentiometer Feedback I Integrated Controller R RC Servo Integrated Controller

