OEM Finland Oy | Puh: 0207 499 499 | info@oem.fi | www.oem.fi
PL 9, 20101 TURKU

PQ12-KARAMOOTTORI

Kompaktein malli

PQ12-30-12-S
Karamoottori



- 6/12 VDC
- 40N
- 20% käyttöaste
- 20mm isku
- IP54

TUOTEKUVAUS

PQ12 on kompaktein malli Actuonixin karamoottoreista. Se painaa vain 15 grammaa.
Tämä malli onkin erittäin sopiva kohteisiin, jossa tarvitaan tarkkaa liikettä, mutta asennustilaa ei ole paljon.


Tästä mallista on saatavilla kolme eri versiota:
- PQ12-P paikkatietoa-anturilla
- PQ12-S rajakytkimillä
- PQ12-R lineaariservo

TEKNISET TIEDOT

IP-luokka	IP54
Iskun pituus	20 mm
Käyttöjännite	12 V DC
Käyttösykli	20 %
Max. käyttölämpötila	50 °C
Max. työntövoima	18 N
Min. käyttölämpötila	-10 °C
Nimellisnopeus, ei kuormaa	28 mm/s
Paino	15 g
Pitovoima	9 N
Välityssuhde	30:1
Äänenpaine	55 dB

PQ12-GG-VV-C

feature	*options*
GG: Gear reduction ratio (refer to load curves above)	**30**, **63**, **100** (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**6**, **12** (DC volts)
C: Controller	**P** Potentiometer Feedback **S** Limit Switches **R** RC Linear Servo (6V Only)

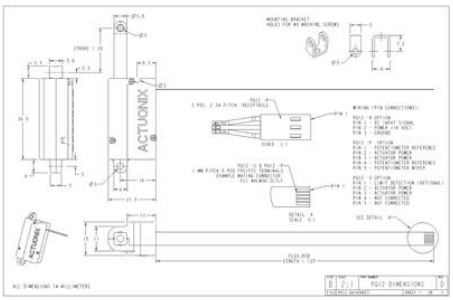

PQ12-GG-VV-C

feature	*options*
GG: Gear reduction ratio (refer to load curves above)	**30**, **63**, **100** (lower ratios are faster but push less force, and vice versa)
VV: Voltage	**6**, **12** (DC volts)
C: Controller	**P** Potentiometer Feedback **S** Limit Switches **R** RC Linear Servo (6V Only)

