


VETOSUKAT K

K-sarja

K40/1

K-Vetosukka 30-40

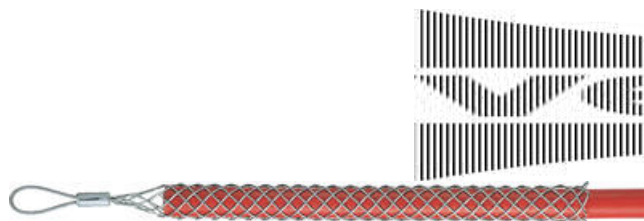

- Raskaiden kaapeliden vetoon
- Valmistettu galvanoidusta teräksestä
- Helppo käyttää

TUOTEKUVAUS



Raskaiden kaapeleiden vetoon

TEKNISET TIEDOT

Kaapelin halkaisija	30-40 mm
Paino	0,42 kg
Vetolujuus	35,1 kN

[illegible][illegible][illegible][illegible][illegible]

The technical drawing shows a cable-stayed bridge with a central pylon and two side pylons. The main span is labeled L1, and the side spans are labeled L2 and L3. The drawing includes a detailed view of the cable profile, showing the arrangement of strands and the central core. Below the drawing is a table with 10 columns: Code, Type, Span, Distance, L1, L2, L3, S, C, and N. The table lists various cable types and their corresponding dimensions. To the right of the table is a cross-section diagram of the bridge deck, showing the internal structure and the location of the cables. The diagram is labeled with 'K' and 'D' and includes a scale of 1:20. Below the diagram is a table with 2 columns: Code and Value. The table lists various cable types and their corresponding values. The drawing is dated 1973 and is labeled '1773 N10102'.

Code	Type	Span	Distance	L1	L2	L3	S	C	N
217.0	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.1	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.2	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.3	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.4	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.5	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.6	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.7	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.8	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
217.9	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.0	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.1	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.2	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.3	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.4	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.5	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.6	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.7	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.8	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
218.9	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.0	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.1	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.2	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.3	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.4	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.5	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.6	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.7	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.8	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
219.9	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.0	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.1	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.2	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.3	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.4	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.5	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.6	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.7	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.8	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
220.9	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
221.0	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
221.1	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
221.2	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
221.3	1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
221.4	1	1.2	1.						

