



PANEELIASENNETTAVAT SUMMERIT Ø22 MM

812510405

ESV summeri 30mm 12-24 V AC/DC

- Korkeaääninen paneelisummeri
- Säädettyä äänen voimakkuus (ESG/ESM)
- 3 valittavaa äänisignaalia (ESG)
- Asennus 22,5 mm tai 30,5 mm aukkoon



TUOTEKUVAUS

Paneeliasennettava summeri laajalla jännitealueella ja korkealla kotelointiluokalla, IP65. Asennuspistoke ruuviliittimillä. Asennus 22 mm aukkoon.

TEKNISET TIEDOT

Halkaisija	30 mm
IP-luokka	IP65
Johdinkoko	2,5 mm ²
Kaapelin läpivienti	Asennuspistoke ruuviliittimillä
Kotelon väri	Musta
Max. käyttölämpötila	60 °C
Max. nimellisvirta	0,04 A
Max. taajuus	3500 Hz
Max. äänenpaine	85 dB
Min. käyttölämpötila	-25 °C
Min. syöttöjännite AC/DC	10 V
Min. äänenpaine	80 dB
Moduulien lukumäärä	0 kpl
Paino	30 g

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.


Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
100		40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80			
200		39	44	48	49	50	52	54	56	58	60	62	64	66	68	70	72	74				
500			38	40	42	44	46	48	50	52	54	56	58	60	62	64	66					

The sound pressure decreases by 6 dB when doubling the distance


Tone table

Tone and light selection on terminal			Tone and light synchronized		
La	N	Lb	X	X	pushing tone / LED flashing light
X	X	X	X	X	continuous tone / steady light

ESV

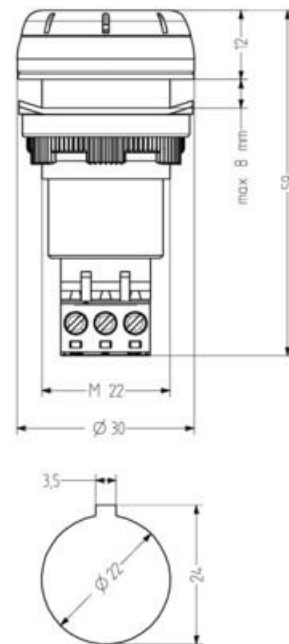

Justerbar volym med hjälp av potentiometer, (ej ESK.)

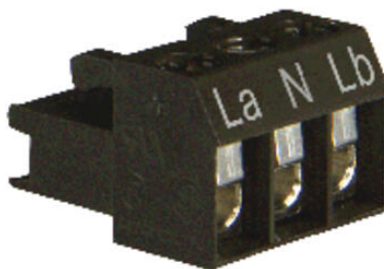

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)																					
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112	114	116	118	120	
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106	108	110	112	114	
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102	104	106	108	110	
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98	100	102	104	106	
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100	
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	
100		40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80			
200		39	44	48	49	50	52	54	56	58	60	62	64	66	68	70	72	74				
500			38	40	42	44	46	48	50	52	54	56	58	60	62	64	66					

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym med hjälp av potentiometer, (ej ESK.)

