

PEHMOKÄYNNISTIN ADXNF 6-45 A

NFC

ADXNF045

Pehmokäynnistin ADXNF 45A 22kW 400V/11kW 230V
(230 VAC ohjaus), NFC

- 2,2-22 kW/400V, 1,1-11 kW/230V
- 3-vaihe 208-600 V AC
- NFC-ohjelmointi
- Ohitus- ja ohjelmoitava relelähtö





TUOTEKUVAUS

[Linkki ADXN-pehmokäynnistimien asennusohjeisiin.](#)

TEKNISET TIEDOT

Asennus	Ruuviasennus, DIN-kiskoon
Hyväksynnät	CE, CSA C22.2-N°14, cULus, IEC 60947-1, UL 508
IP-luokka	IP20
Johdinkoko	4-10 mm ²
Korkeus	129 mm
Leveys	45 mm
Max. käyttölämpötila	60 °C
Max. syöttöjännite AC	240 V AC
Max. taajuus	60 Hz
Max. varastointilämpötila	80 °C
Min. käyttölämpötila	-20 °C
Min. syöttöjännite AC	100 V AC
Min. taajuus	50 Hz
Min. varastointilämpötila	-30 °C

Moottorin jännite max.	600 V AC
Moottorin jännite min.	208 V AC
Moottorin teho max.	22 kW
Moottorin tyyppi	3-vaiheinen asynkronimoottori
Moottorin virta max.	45 A
Moottorin virta min.	0 A
Nimellinen eristysjännite Ui	600 V
Paino	0,67 kg
Pakkauskoko	1 kpl
Suosittelu kiristysmomentti	2
Syvyys	160 mm
Väri	Harmaa RAL 7035

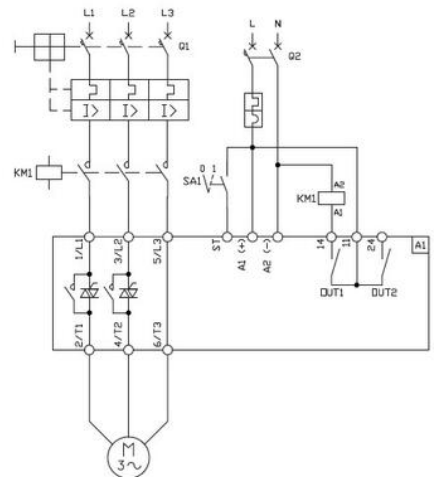
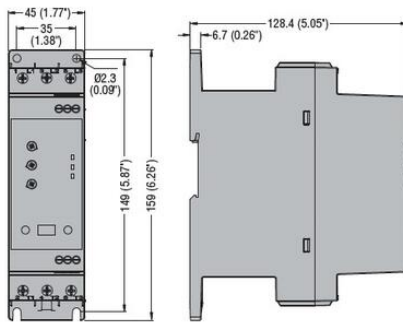


Type of application	Starting voltage (%)	Acceleration time (s)	Deceleration time (s)
Pump	40	10	10
Hydraulic pump	40	2	2
Process compressor	40	2	2
Process compressor	50	10	10
Small compressor	40	1	1
Line motor fan	40	10	10
High speed fan	40	10-20	10
Centrifugal fan	40	1	1
Compressor unit	50	1-10	1
Appliances	40	20	1

Soft starter	In	Nr starts/hour 400%In, 6s ramp	
		Without fan	With fan
ADXN..6..	6 A	60	90
ADXN..12..	12 A	30	70
ADXN..18..	18 A	30	60
ADXN..25..	25 A	10	70
ADXN..30..	30 A	10	60
ADXN..38..	38 A	*	40
ADXN..45..	45 A	*	20

*built-in fan as standard on these sizes.



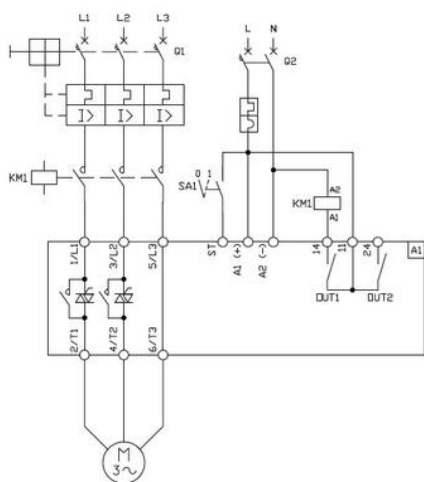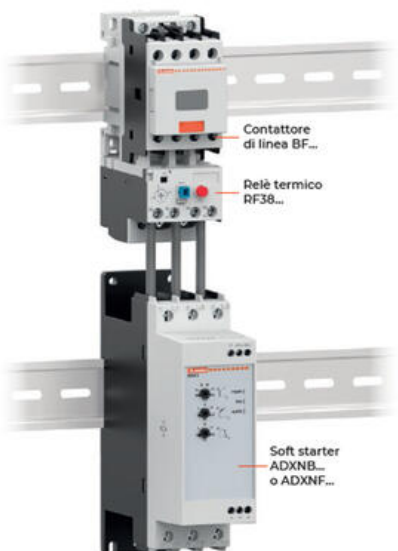

Type of application	Starting value	Acceleration using time	Deceleration using time
	[m]	[m]	[m]
Pump	40	2	10
Hydraulic jump	40	1	2
Platen compression	40	3	3
Screen compression	30	10	0
Steel compression	40	1	0
Low inertia fan	40	10	0
High inertia fan	40	10-20	0
Overhaul fan	40	0	0
Compressor ball	40	0-10	0
Compressor	40	0	0

		Nr starts/hour 400%In, 6s ramp	
Soft starter	In	Without fan	With fan
ADNX..6..	6 A	60	90
ADNX..12..	12 A	30	70
ADNX..18..	18 A	30	60
ADNX..25..	25 A	10	70
ADNX..30..	30 A	10	60
ADNX..38..	38 A	*	40
ADNX..45..	45 A	*	20

*built-in fan as standard on these sizes.

