

TAIPUISA MONIPISTEINEN LÄMPÖTILAMITTARI FLEX-O

TC96-O

TC96-O

Joustava putkiston lämpötilan monipistemittaus

- Jopa 10 mittauspistettä
- Erittäin joustava asennus
- Helppo puhdistaa
- Pituus aina 40m asti
- Saatavana vastusanturina






TUOTEKUVAUS

Jotta saavutetaan nopea vasteaika, on mittauselementti painettu jousivoimalla kiinni suojaakuoren pintaan, jolloin mittapää ja suojaakuori muodostaa yhden kokonaisuuden.

Liittimet ja lämpötilalähettimet asennetaan kytkentäkoteloon, joka on liitettyä monipistemittaukseen tai ne voidaan asentaa erillisenä keskusketeloon.

TEKNISET TIEDOT















Aineen kanssa kosketuksissa olevien osien materiaali	Alloy, Hiiliteräs
Materiaali	Ruostumaton teräs 316L, Ruostumaton teräs 316Ti

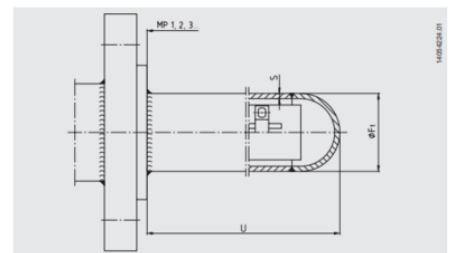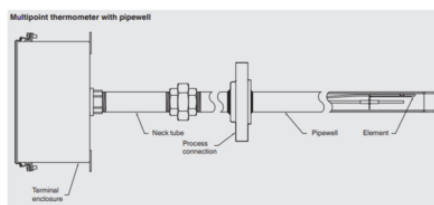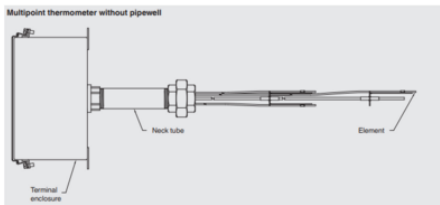

Pipe dimensions $\varnothing F_1$
 ■ 1 1/4 NPS
 ■ 1 1/2 NPS
 ■ 2 NPS
 ■ 3 NPS
 Other sizes available

Insertion length U
 Freely selectable (max. 40 m)
Material
 ■ Stainless steel 316
 ■ Stainless steel 316L
 Other materials available

■ Process connection

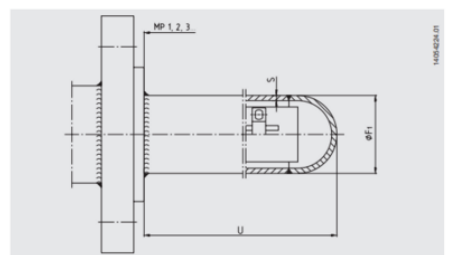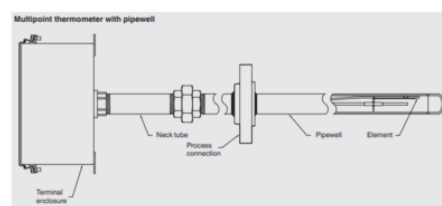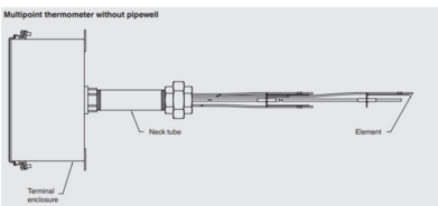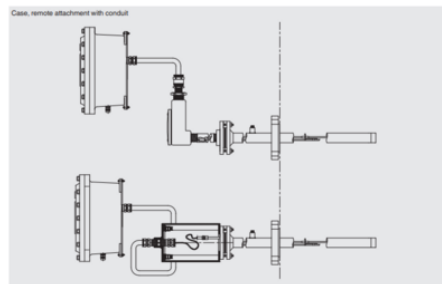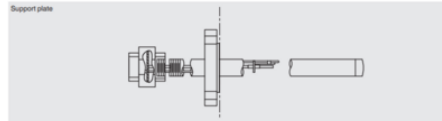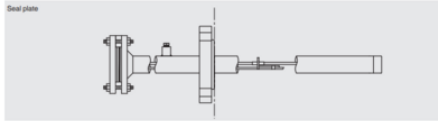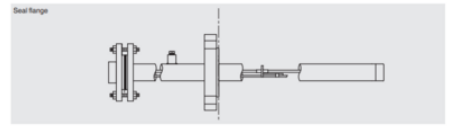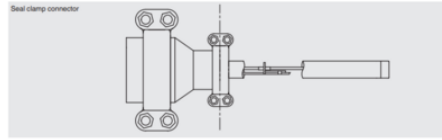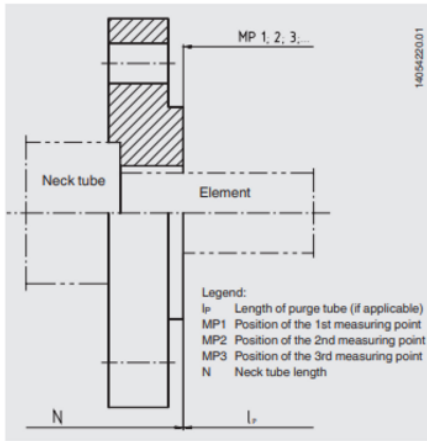

Pipe dimensions $\varnothing F_1$

- 1 1/4 NPS
- 1 1/2 NPS
- 2 NPS
- 3 NPS

Other sizes available

Insertion length U

Freely selectable (max. 40 m)

Material

- Stainless steel 316
- Stainless steel 316L

Other materials available

■ Process connection

