

LANGATTOMAT RAJAKYTKIMET

Pienisraja-kytkin

APWT41RFH8

Rullarajakytkin APW 868 MHz



- Yhdistetään langattomasti releyksikköön, kantama jopa 80m
- Ei paristoja tai akkuja
- IP66




TUOTEKUVAUS

EI PARISTOJA, EI KAAPELEITA, EI RAJOITTEITA!

Sarjaan on saatavissa raja-, köysi- tai jalkakytkin sekä painonappi ja painonappikotelo. Toimilaite yhdistetään langattomasti releyksikköön, josta saadaan releulostulo. Yhteen releeseen voidaan yhdistää jopa 28 toimilaitetta. Toimilaite saa energiansa kineettisestä liike-energiasta, joka syntyy kun esim. rajakytkimen toimipäätä painetaan. Tehdasympäristössä kantama on 30 m ja vapaassa tilassa jopa 80 m. Lisäksi on saatavissa antenni, jolla kantamaa voidaan vahvistaa.

Tilausavain

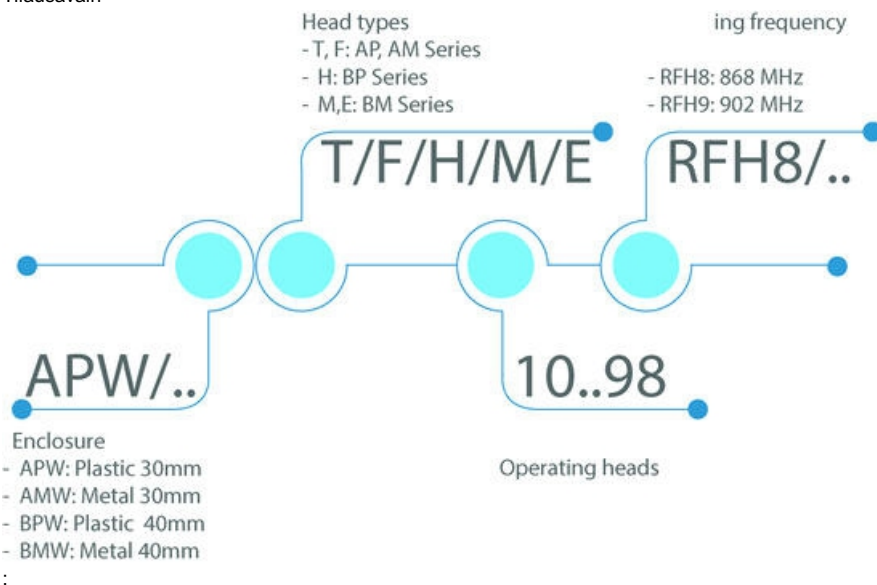

TEKNISET TIEDOT

IP-luokka

IP66

Max. käyttölämpötila	70 °C
Min. käyttölämpötila	-25 °C
Rungon materiaali	Muovi

**Installation tips**

RRH8 (868MHz) and RRH9 (902MHz) receivers

Main features

The wireless signal works at its best when the space is free between the receiver and the transmitter.
Eliminate as far as possible obstacles, mostly if they are metallic!

SGN

CH4



CH3

CH2

CH1

PRK

● COMING



Receiver	Frequency of signal through the window
RRH8 (868MHz)	Between 10 and 15%
RRH9 (902MHz)	Between 10 and 15%
CH4	Between 10 and 15%
CH3	Between 10 and 15%
CH2	Between 10 and 15%
CH1	Between 10 and 15%
PRK	Between 10 and 15%

NOTE: The signal strength is not guaranteed. The signal strength is only a reference value. The signal strength is not guaranteed. The signal strength is only a reference value.

**Installation tips**

RRH8 (868MHz) and RRH9 (902MHz) receivers

Main features

The wireless signal works at its best when the space is free between the receiver and the transmitter.
Eliminate as far as possible obstacles, mostly if they are metallic!

SGN

CH4



CH3

CH2

CH1

PRK

● COMING



Receiver	Frequency of signal through the window
RRH8 (868MHz)	Between 10 and 15%
RRH9 (902MHz)	Between 10 and 15%
CH4	Between 10 and 15%
CH3	Between 10 and 15%
CH2	Between 10 and 15%
CH1	Between 10 and 15%
PRK	Between 10 and 15%

NOTE: The signal strength is not guaranteed. The signal strength is only a reference value. The signal strength is not guaranteed. The signal strength is only a reference value.

