

JALKAKYTKIN

Teollisuuskäyttöön

606.1600.006

Jalkakytin F1-U1ZUN, 1-poljin, 1 NO+1 NC,
hidaskosketin, suoja

- Tukeva rakenne
- Kotelointiluokka IP65
- Rele, kontaktori ym. voidaan asentaa suojan sisään
- Saatavana myös erikoismalleja esim. sairaalakäyttöön



TUOTEKUVAUS

Koodien selitykset:

F1 = 1 poljin

F2 = 2 poljinta

UN = Varvassuoja

U1Z = Hidaskosketin, 1 NO+1 NC

U2Z =	Hidaskosketin, 2 NO+2 NC
SU1Z =	Momenttikosketin, 1 NO+1 NC (kosketin vaihtaa tilaansa vakionopeudella, "nakshtava")
SU2Z =	Momenttikosketin, 2 NO+2 NC (kosketin vaihtaa tilaansa vakionopeudella, "nakshtava")
U1Y =	"Push-push" –kosketin. Kerran painettaessa koskettimet vaihtavat tilaansa, ja toisen kerran painettaessa palautuvat alkutilaansa, 1 NO+1 NC.
U2ZD =	Kaksoistoiminta: ensimmäinen kosketinpari toimii painettaessa poljinta vasteeseen asti, toinen pari kytkeytyy mukaan kun poljinvoimaa lisätään ja painetaan pohjaan asti, 2 NO+2 NC.

TEKNISET TIEDOT

TIEDOT

Koskettimet	1 NO, 1 NC
IP-luokka	IP65
Max. jännite	240 V
Nimellisvirta, terminen	10 A
Kaapelisisäänmeno	1xM20x1,5
Rungon materiaali	Alumiini
Polkien määrä	1
Polkimen materiaali	Muovi
Min. käyttölämpötila	-30 °C
Max. käyttölämpötila	80 °C
Max. toimintataajuus	50 kertaa/min
B10d	20x10^6
Hyväksynnät	CCC, CE, CSA US

Standard values for safety technology

EN60959-1:2011

4 x 10⁶ Restrictions in article designation "C"

4 x 10⁶ Restrictions in article designation "D"

4 x 10⁶ Restrictions in article designation "E"

4 x 10⁶ Restrictions in article designation "F"

Standards

EN60959-1:2011, DIN EN 60959-1, IEC 60959-1

EN60959-2:2011, DIN EN 60959-2, IEC 60959-2

Approvals*

CE, ATEX, Q300 (same policy)

UL, ENEC (in type designation "D")

250V (only switches that have an appropriate label)

* Approvals depend on type.

More information can be found in the data sheet.

Mechanical data

Exhaust: Cast aluminum (powder coated)

Cover, Protective shield DIN: Cast aluminum (powder coated)

Foot pedal: Thermoplastic

Operating temperature (with no icing / no condensation): -30°C to +80°C (-20°C to +40°C in type designation "D")

Storage temperature: -30°C to +80°C (-20°C to +40°C in type designation "D")

Mechanical service life: > 1 x 10⁶ switching cycles when using switches with potentiometer 1 x 10⁶

Switching frequency: 10 min⁻¹ when using switches with potentiometer (20 min⁻¹)

Type of connection: Screw connections (M5.5)

Conductor cross sections: Single wire 0.3 - 1.5 mm² or stranded wire with female 0.3 - 1.5 mm²


Cable entry: M20 x 1.5

Weight with cover: 0.1 to 0.8 kg F2 = 1.7 kg F3 = 3.0 kg

Weight with protective shield DIN: 0.1 to 1.5 kg F2 = 3.0 kg F3 = 5.0 kg

Protection class: Protection class depends on type. Standard is IP 65.

Technical drawing of the switch showing front and side views with dimensions: 76, 94, 250, 93, 60, 147, 66, 156.

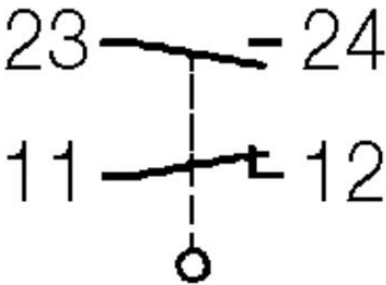

Standard values for safety technology	
WMI	20 x 10°
5 x 10° Restrictions in article designation "X" *	
2 x 10° Restrictions in article designation "Y" *	
4 x 10° Restrictions in article designation "Z" *	
1 x 10° Restrictions in article designation "T" *	
* Once a restriction exists, the lowest value needs to be applied.	

This technical data is generic to our standard foot switch range, please refer to individual technical data sheets for exact product information as the technical data above may vary.

Standards	
VDE 0660 1100, DIN EN 60947-1, IEC 60947-1	
VDE 0660 7260, DIN EN 60947-5-1, IEC 60947-5-1	
Approvals*	
CE, CE-UK, CE-Mark, CE-Mark, CE-Mark, CE-Mark	
UL, ENEC, BSI, VDE, TUV, CE, CE-Mark, CE-Mark, CE-Mark	
* Approvals depend on type.	
More information can be found in the data sheet.	

Mechanical data	
Enclosure	Cast aluminium (powder-coated)
Cover, Protective shield UN	Cast aluminium (powder-coated)
Foot pedal	Thermoplastic
Operating temperature (with no load / no condensation)	-30°C to +80°C, 20°C to +80°C in type designation "XT"
Storage temperature	-30°C to +80°C, 20°C to +80°C in type designation "XT"
Mechanical service life	> 1 x 10 ⁶ switching cycles when using switches with potentiometer 5 x 10 ⁶
Switching frequency	50 min ⁻¹ when using switches with potentiometer 20 min ⁻¹
Type of connection	Socket connection (M12)
Conductor cross sections	Single wire 0.5 - 1.5 mm ² or stranded wire with ferrule 0.5 - 1.5 mm ²
Cable entry	M20 x 1.5
Weight with cover	F1 = 0.8 kg, F2 = 1.7 kg, F3 = 3.0 kg
Weight with protective shield UN	F1 = 1.5 kg, F2 = 2.8 kg, F3 = 5.4 kg
Protection class	Protection class depends on type. Standard is IP 65.