OEM Finland Oy | Puh: 0207 499 499 | info@oem.fi | www.oem.fi
PL 9, 20101 TURKU

26-1000-SARJAN PAINEENSÄÄDIN

Korkeaan paineeseen

26-1000
26-1000-sarja

- Max. sisääntulopaine: 690 bar
- Max. ulostulopaine: 690 bar
- Lämpötila alue: -40 - 74°C
- CV: 0.06, 0.02, 0.12, 0.30
- Vuototestaus: Kuplatiivis

TUOTEKUVAUS

26-1000-sarjan paineenalennussäädin soveltuu jopa 10 000 psig (690 bar) paineen säätelyyn. Se tarjoaa vakioilmaventtiilin, joka auttaa hallitsemaan ja alentamaan ulostulopainetta tarkasti. Säädintä voi muokata tarpeen mukaan vaihdettavan jousen ja anturin ansiosta, mikä tekee siitä erittäin monipuolisen. Kevyesti säädettävä käsinuppi vaatii vain pienen vääntömomentin, mikä helpottaa käyttöä.

Laite on ihanteellinen testauslaitteistoihin, kalibrointitelineisiin ja erilaisiin tuotantoympäristöihin.



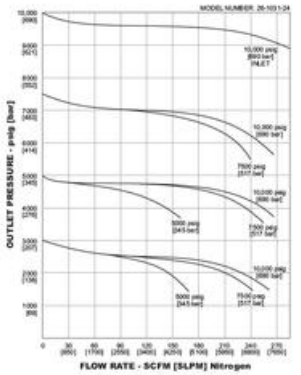

26-10	1	4	-	3	4	[BLANK]
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGE		INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	OPTIONS
26-10	1 – Brass 6 – 316 Stainless Steel	1 – 200-10,000 psig 14-690 bar (Stainless Steel Body Only) 2 – 50-6000 psig 2.4-415 bar 3 – 25-4000 psig 1.7-275 bar 4 – 15-2500 psig 1-175 bar 5 – 10-1500 psig 0.7-105 bar 6 – 5-890 psig 0.3-55 bar 7 – 5-500 psig 0.3-35 bar		3 – SAE¹ (SAE¹ for Europe) 2 – NPTF 3 – MS33649¹ 4 – High Pressure 6 – Medium Pressure 1. Two inlet and outlet ports standard at 90°	4 – 1/4" 6 – 3/8" (NPTF only)	[BLANK] – None 005 – FKM (Viton®-A) O-rings 008 – 1/4" NPTF inlet and outlet gauge ports 045 – Non-venting 163 – 1/2" inlet and outlet ports 249 – 15,000 psig / 1034 bar inlet capability (Stainless Steel model only)

NOTE: All pressure ranges vent to zero psig.

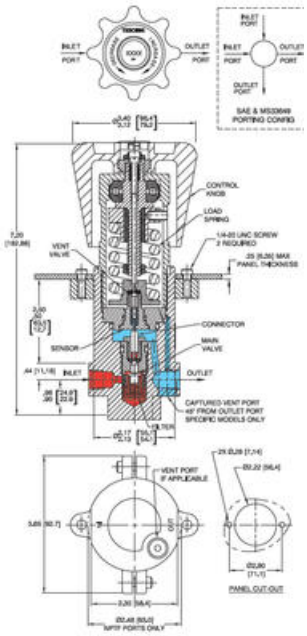



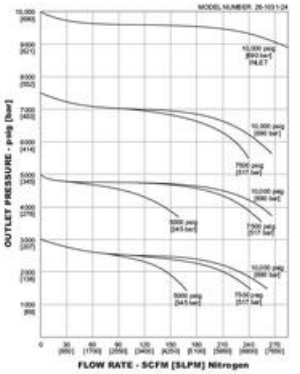

26-10	1	4	-	3	4	[BLANK]
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE RANGE		INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	OPTIONS
26-10	1 – Brass 6 – 316 Stainless Steel	1 – 200-10,000 psig 14-690 bar (Stainless Steel Body Only) 2 – 50-6000 psig 3.4-415 bar 3 – 25-4000 psig 1.7-275 bar 4 – 15-2500 psig 1-175 bar 5 – 10-1500 psig 0.7-105 bar 6 – 5-800 psig 0.3-55 bar 7 – 5-300 psig 0.3-25 bar		1 – SAE¹ (SAE¹ for Europe) 2 – NPTF 3 – MS33649 4 – High Pressure 6 – Medium Pressure 1. Two inlet and outlet ports standard at 90°	4 – 1/4" 6 – 2/8" (NPTF only)	[BLANK] – None 005 – FKM (Viton®-A) O-rings 008 – 1/4" NPTF inlet and outlet gauge ports 045 – Non-venting 162 – 1/2" inlet and outlet ports 249 – 15,000 psig / 1034 bar inlet capability (Stainless Steel model only)
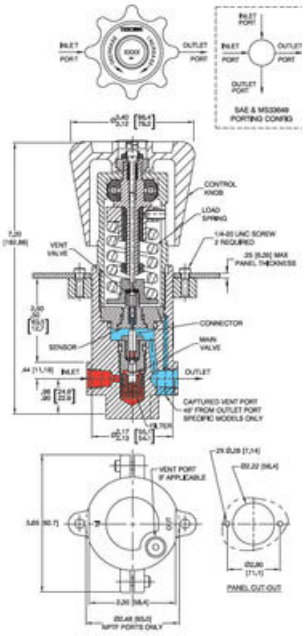
NOTE: All pressure ranges vent to zero psig.