

44-3200-SARJAN PAINEENSÄÄDIN



Kalvotoiminen

44-3200
 44-3200-sarja

- Max. sisääntulopaine: 207 bar
- Max. ulostulopaine: 13.8
- Lämpötila alue: -40 - 60°C
- CV: 1.0, 1.8
- Vuototestaus: Kuplatiivis < 2 x 10⁻⁸ atm cc/sec He



TUOTEKUVAUS







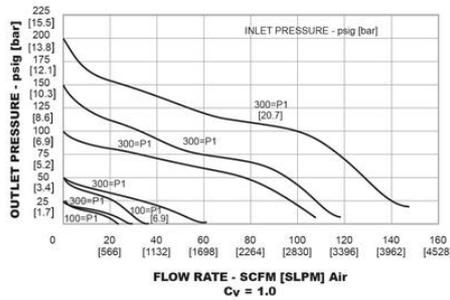
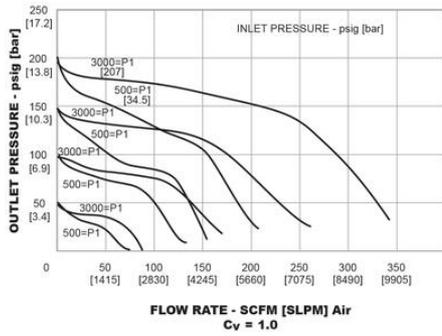


Threaded End Connection Part Number Selection

44-32	6	1		J		2		8		1	
		BODY MATERIAL	OUTLET PRESSURE RANGES	SEAL	SOFT GOODS	SEAL	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	MAXIMUM INLET PRESSURE	OPTIONS	
44-32	1 - Brass 6 - 316 Stainless Steel	0 - 0.25 psig 0 - 1.7 bar 0 - 0.50 psig 0 - 3.4 bar 2 - 0.100 psig 0 - 6.9 bar 3 - 0.100 psig 0 - 6.9 bar 4 - 0.200 psig 0 - 13.8 bar	H - PTFE J - PTFE, O-ring PTFE, O-ring Energized lip seal	PTFE, O-ring PTFE, O-ring Energized lip seal	2 - NPT 4 - 1/2"	6 - 1/2" 8 - 1/2"	1 - 3000 psig 787 bar 3 - 500 psig 34.5 bar	1 - 3000 psig 787 bar C _v = 1.8 403 - No gauge ports 206 - One 1/2" gauge port at 90° C _v = 1.8			

Flanged End Connector Part Number Selection:

44-32W	6	2	1		8		1	S2	1		
BASIC SERIES	BODY, PIPE & FLANGE MATERIAL	OUTLET PRESSURE RANGES	DASH NO	FLOW CAPACITY	SEAT	SEAL	OPERATING TEMPERATURE	GAUGE PORT OPTIONS	FLANGE SIZE	FLANGE CLASS	FLANGE FACE
44-32W	6 - 316 SS	0 - 0.25 psig 0 - 1.7 bar 1 - 0.50 psig 0 - 3.4 bar 2 - 0.100 psig 0 - 6.9 bar 3 - 0.100 psig 0 - 6.9 bar 4 - 0.200 psig 0 - 13.8 bar	1	1.0	PC/TFE	PTFE	20 to 140°F -29 to 60°C	A - E.I.L. Inlet, 90° gauge port B - E.I.L. Inlet, 180° gauge port C - E.I.L. Inlet, 270° gauge port D - E.I.L. Inlet, 360° gauge port	1 - 1/2" 3 - 1/2"	11 - 1508 21 - 3009	1 - 81 2 - 813

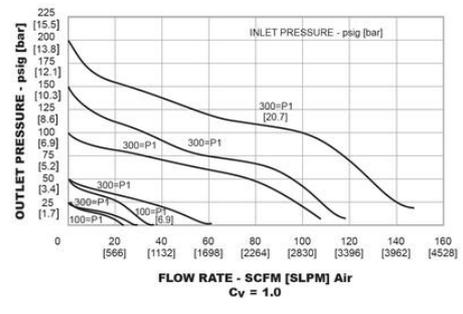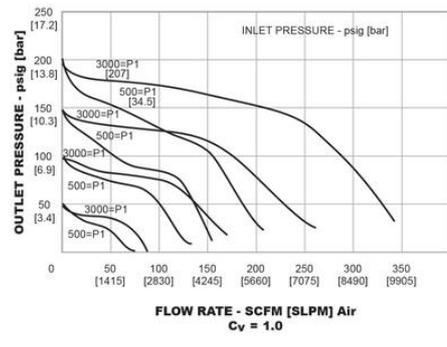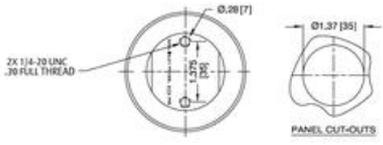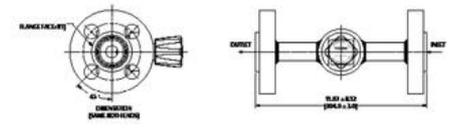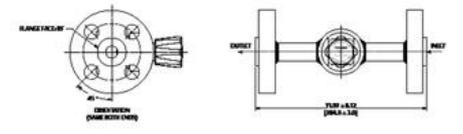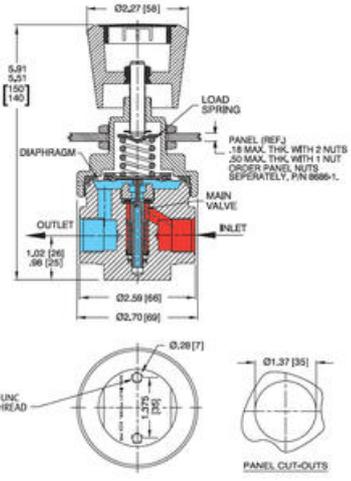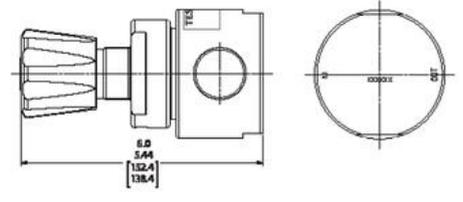

Threaded End Connector Part Number Selection

BASIC SERIES	6	1	J	2	8	1	OPTIONS
BODY MATERIAL	OUTLET PRESSURE RANGE	SEAT	SCALE	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	MAXIMUM INLET PRESSURE	
44-32	1 - Brass 6 - 316 Stainless Steel	0 - 0.75 psig 0 - 1.7 bar 1 - 0.50 psig 0 - 3.4 bar 2 - 0.100 psig 0 - 6.9 bar 3 - 0.150 psig 0 - 10.3 bar 4 - 0.200 psig 0 - 13.8 bar	M, N, PCTE	PTEE, O ring PTEE, Spring Emergently Sealed	2 - NPT	1/4 - 1/2 1/4 - 1/2 3/8 - 1/2	401 - One 1/8" gauge port at 90° Cv = 1.8 402 - No gauge ports 403 - No gauge ports 206 - One 1/8" gauge port at 90° Cv = 1.8

Flanged End Connector Part Number Selection:

BASIC SERIES	6	2	1	B	J	52	1		
BODY, PIPE & FLANGE MATERIAL	OUTLET PRESSURE RANGE	DASH NO.	FLOW CAPACITY	SEAT	OPERATING TEMPERATURE	GAUGE PORT OPTIONS	FLANGE SIZE	FLANGE CLASS	FLANGE FACE
44-32W	6 - 316 SS	0 - 2.5 psig 0 - 1.7 bar 1 - 0.50 psig 0 - 3.4 bar 2 - 0.100 psig 0 - 6.9 bar 3 - 0.150 psig 0 - 10.3 bar 4 - 0.200 psig 0 - 13.8 bar	1	1.0	PCTE PTEE -30 to 180°C -29 to 60°C	A - 1/8" ball, no gauge port B - 1/8" ball, 1/8" gauge port at 90° J - 1/8" ball, 2 gauge ports at 90°	1 - 1 1/2 3 - 1"	11 - 1500 21 - 3000 41 - 6000 52 - 9000 / 15000	1 - RT 2 - RT

