

44-4600-SARJAN PAINEENSÄÄDIN

Alle ilmakehän paineen toimiva

44-4600
 44-4600-sarja

- Max. sisääntulopaine: 27,6 bar
- Max. ulostulopaine: 1,6 bar
- Lämpötila alue: -40 - 74°C
- CV: 0.24
- Vuototestaus: Kuplatiivis



SPRING LOADED




DOME LOADED




AIR LOADED

TUOTEKUVAUS

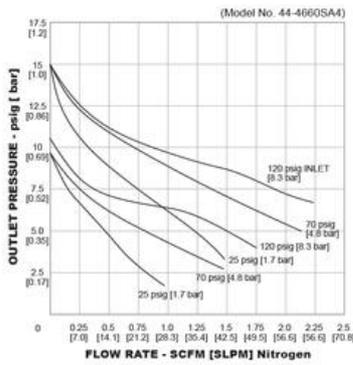



Example for selecting a part number:

| 44-46 | 6 | 0 | 5 | 2 | 4 | - | See Number Below |
|--------------|--------------------------|--|-----------|----------------------------|----------------------------|---|--|
| BASIC SERIES | BODY MATERIAL | OUTLET PRESSURE RANGE | SOFT GOOD | INLET AND OUTLET PORT TYPE | INLET AND OUTLET PORT SIZE | | MODIFICATIONS |
| 44-46 | 6-316 Stainless Steel | 0-50 mmHg absolute 15 psig / 1.0 bar [1.28 MPa = 50 mmHg absolute] | 5-PTFE | 2-NPT | 4-1/4" | | 001 - One 1/4" gauge port at 90° 002 - Two 1/4" gauge ports at 60° (Spring) 019 - 1000 (psi) / 241 bar maximum inlet pressure C _v = 0.06 |

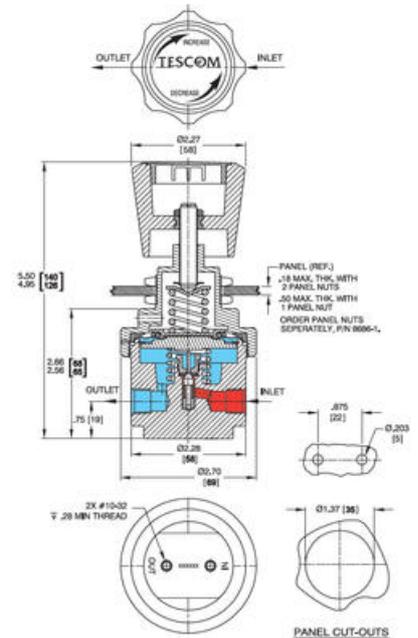

44-4600 Series Typical Application



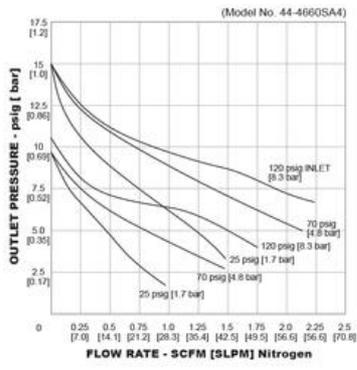

Example for selecting a part number:

| 44-46 | 6 | 0 | 5 | 2 | 4 | - | See Number Below |
|--------------|---------------------|----------------------------|-----------|----------------------------|----------------------------|---|---|
| BASIC SERIES | BODY MATERIAL | OUTLET PRESSURE RANGE | SOFT GOOD | INLET AND OUTLET PORT TYPE | INLET AND OUTLET PORT SIZE | | MODIFICATIONS |
| 44-46 | 316 Stainless Steel | 15 psig / 1.0 bar | PTFE | NPT | 1/4" | | 001 One 1/4" gauge port at 90° 002 Two 1/4" gauge ports at 90° (Ergo) 019 7500 psig / 241 bar maximum inlet pressure C ₁ - 100% |
| | | 1.28 Hg = 50 mmHg absolute | | | | | |

44-4600 Series Typical Application

