



CP32-SARJAN PAINEENSÄÄDIN


Piloottiventtiili

CP32
 CP32-sarja

- Max. sisääntulopaine: 207 bar
- Max. ulostulopaine: 34.5
- Lämpötila alue: -26 - 60°C
- CV: 1.0
- Vuototestaus: Kuplatiivis






TUOTEKUVAUS




Example for selecting a part number:

CP32	1	4	0	2	2	00	0
BASIC SERIES							
BODY MATERIAL	1 - Brass	4 - 316 Stainless Steel					
OUTLET PRESSURE	2 - 0-100 psig 0-6.9 bar						
SEAT AND SEAL MATERIAL	0 - PCTE, PTFE						
O-RING MATERIAL	0 - Nitril, Buna N, 2 - Fluor (Viton®-A)						
INLET AND OUTLET PORT TYPE	2 - NPTF						
INLET AND OUTLET PORT SIZE	00 - 1/2"						
GAUGE OPTIONS (Bottom view)							0 - Outlet Gauge at 90° 0-100 psig 0-6.9 bar 1 - Outlet Gauge at 90° 0-500 psig 0-34.5 bar 2 - Outlet Gauge at 270° 0-100 psig 0-6.9 bar 3 - Outlet Gauge at 90° 0-500 psig 0-34.5 bar

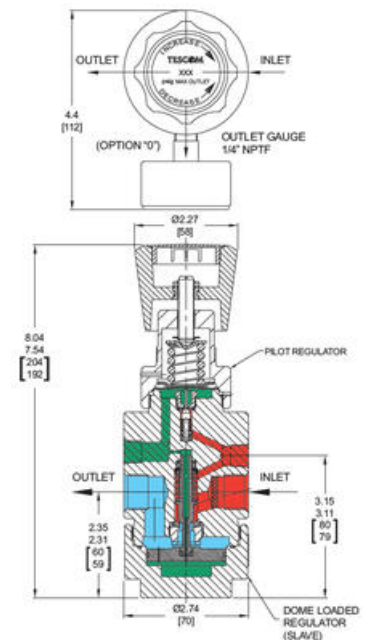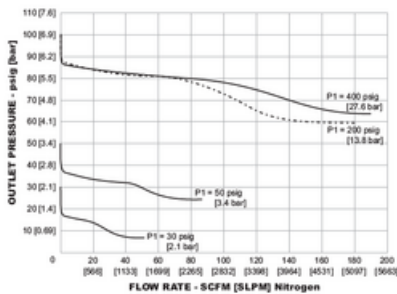

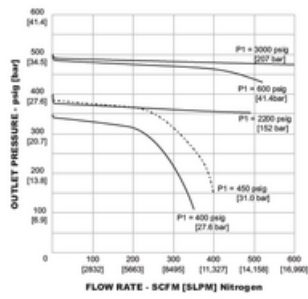

CP3220 - Lowest P1 pressures
(CP3214822880-001)

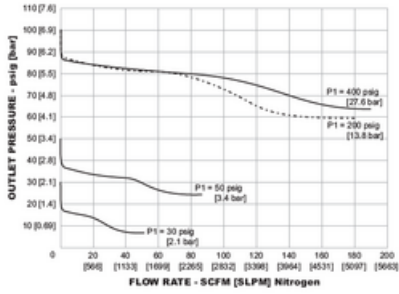

Example for selecting a part number:

BASIC SERIES	1	4	0	2	2	08	0
BASIC SERIES	BODY MATERIAL	OUTLET PRESSURE	SEAT AND SEAL MATERIAL	O-RING MATERIAL	INLET AND OUTLET PORT TYPE	INLET AND OUTLET PORT SIZE	GAUGE OPTIONS (Bottom View)
CP32	1 - Brass 6 - 316 Stainless Steel	2 - 0-100 psig 0-6.9 bar 3 - 0-270 psig 0-12.2 bar 4 - 0-500 psig 0-34.5 bar	0 - PTFE PTFE	0 - Nitrile, Buna N, Viton [®] -A	2 - NPT	08 - 1/2"	0 - Outlet Gauge at 90° 0-100 psig 0-6.9 bar 1 - Outlet Gauge at 90° 0-100 psig 0-34.5 bar 2 - Outlet Gauge at 270° 0-100 psig 0-11.8 bar 3 - Outlet Gauge at 90° 0-100 psig 0-20.7 bar

