

DK-SARJAN PAINEENSÄÄDIN

Kupoli sekä ilmakeuhmitteinen

DK
 DK-sarja


- Max. sisääntulopaine: 69 bar
- Max. ulostulopaine: 48.3
- Lämpötila alue: -26 - 73°C
- CV: 0.35
- Vuototestaus: Kuplatiivis



DK AIR LOAD
 SHOWN WITH
 THE ER5000




DK DOME LOAD

TUOTEKUVAUS

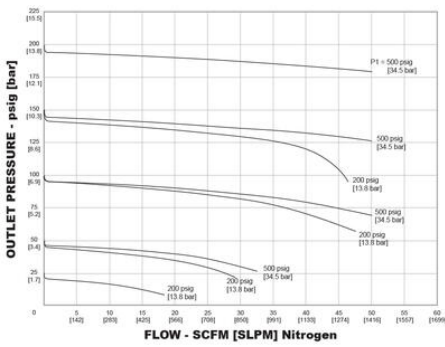

Example for selecting a part number:

BASIC SERIES	LOAD TYPE	BODY, BONNET, BACK-CAP MATERIAL	OUTLET PRESSURE RANGE	VALVE SEAT MATERIAL	DIAPHRAGM OR O-RING MATERIAL	VENTING	OPTIONAL	PORTING	PORT SIZE AND TYPE
DK	D - Dome load	1 - Brass	Air load only 4 - 0.600 (psig) 0-41.4 bar	C - PTFE	B - Nitrile, Buna N	V - Segregated (optional part 1/8)	9 - None	A - No gauge ports at 60° B - Two gauge ports at 60° D - One outlet gauge at 90°	A - 1/4" NPT B - 3/8" NPT C - 1/2" NPT F - 1/4" NPT H - 1/2" NPT M - 1/2" NPT N - None
A	Air load	4 - 316 Stainless Steel	Dome load only 7 - 0.300 (psig) 0-48.3 bar	T - PTFE V - Polytetrafluorethylene (Vespel®)	E - E.P. V - Viton® (Viton® A)				

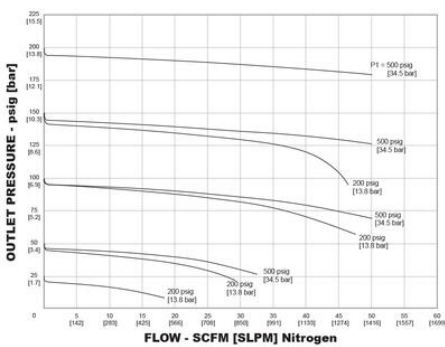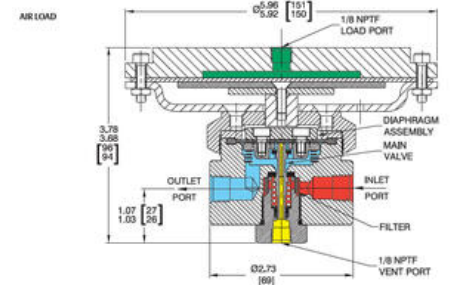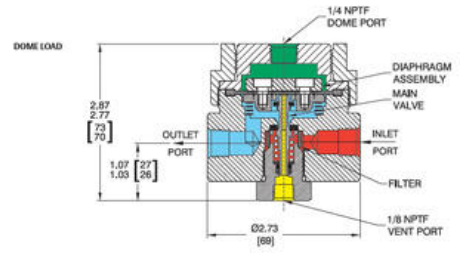

Example for selecting a part number:

BASIC SERIES	LOAD TYPE	BODY, BONNET, BACK-CAP MATERIAL	OUTLET PRESSURE RANGE	VALVE SEAT MATERIAL	DIAPHRAGM OR O-RING MATERIAL	VENTING	OPTIONAL	PORTING	PORT SIZE AND TYPE
DK	D - Dome load	1 - Brass	Air load only 4 - 0.600 (psig) 0-41.4 bar	C - PTFE	B - Nitrile, Buna N	V - Segregated (optional part 1/8)	9 - None	A - No gauge ports at 60° B - Two gauge ports at 60° D - One outlet gauge at 90°	A - 1/4" NPT B - 3/8" NPT C - 1/2" NPT F - 1/4" NPT H - 1/2" NPT M - 1/2" NPT N - None
A	Air load	4 - 316 Stainless Steel	Dome load only 7 - 0.300 (psig) 0-48.3 bar	T - PTFE V - Polytetrafluorethylene (Vespel®)	E - E.P. V - Viton® (Viton® A)				

