

DHM5/DH05-OHJELMOITAVA PULSSIANTURI

Ohjelmoitava perusmalli teollisuuskäyttöön

DHM510RGXXEPROGGMR
Pulssiant. aks. 10mm, ohj. M12-liitin

- Halkaisija 58 mm, 6,8 ja 10 mm akseli tai 14 ja 15 mm reikä
- Ohjelmoitava resoluutio, laskentasuunta, 0-pulssin pituus ja paikka. Ohjelmointi meillä tai ohjelmointityökalun avulla
- Resoluutio max. 500 000 p/k
- IP65, optio IP67
- Kaapelilla tai M12-liittimellä



TUOTEKUVAUS


Tämä tuotesarja on rakennettu vankalle ja luotettavalle mekaaniselle ja sähköiselle alustalle ja se rakennettiin alusta alkane olemaan luotettava ja kestävä. Sähköinen suojaus on sisäänrakennettu vähentämään "ensimmäisen asennuksen" virheitä. Mekaanisesti erittäin tarkasti tiivistetyt laakerit takaavat pitkän käyttöiän myös ankarissa olosuhteissa. Tuote on testattu toimimaan -40°C - +100°C ympäristöissä. Tämä on paras 58mm pulssianturi raskaaseen teolliseen käyttöön.

TEKNISET TIEDOT


TIEDOT

Anturin tyyppi	Inkrementtianturi
Kotelon halkaisija	58 mm
Akselin halkaisija	10 mm
Liitäntä	M12-liitin
IP-luokka	IP65
Max. pyörimisnopeus	12000 rpm
Min. syöttöjännite DC	4,75 V DC
Max. syöttöjännite DC	30 V DC
Min. käyttölämpötila	-30 °C
Max. käyttölämpötila	100 °C
Ulostulo	Push/Pull


Directions Possibilities⁽⁵⁾

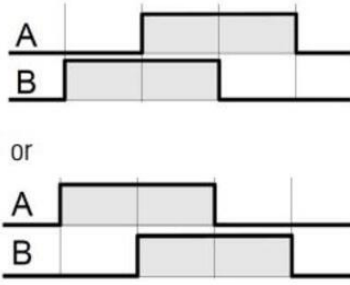

DHMS_10 Connection G6R (Radial M23)

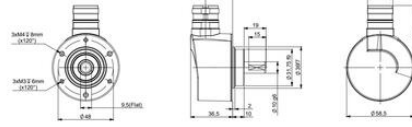

DHMS_06 Connection GMA (Axial M12)



STANDARD CONNECTIONS

		-	+	A or S	B or C	Z	A/or S/	B/or C/	Z/	Ground
GM	M12 - 8 Pins	1	2	3	4	5	6	7	8	Connector Body
G6	M23 - 12 Pins CW	1	2	3	4	5	6	7	8	Connector Body
G6	M23 - 12 Pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connector Body
U3	PVC Cable - 8 Wires	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding
GC	PVC Cable - 8 Wires	BK (Black)	RD (Red)	GN (Green)	BN (Brown)	VT (Violet)	YE (Yellow)	OG (Orange)	BU (Blue)	General Shielding
G3	PVC Cable - 8 Wires	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding
GP	PVC Cable - 12 Wires (incl. G3)	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	BK (Black)	General Shielding
TE	Silicone Cable ⁽⁶⁾ - 8 Wires (incl. G3)	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding

STANDARD CONNECTIONS

		-	+	A or S	B or C	Z	A/or S/	B/or C/	Z/	Ground
GM	M12 - 8 Pins	1	2	3	4	5	6	7	8	Connector Body
G6	M23 - 12 Pins CW	1	2	3	4	5	6	7	8	Connector Body
G6	M23 - 12 Pins CCW	10 + 11	2 + 12	8	5	3	1	6	4	Connector Body
U3	PVC Cable - 8 Wires	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding
GC	PVC Cable - 8 Wires (incl. G3)	BK (Black)	RD (Red)	GN (Green)	BN (Brown)	VT (Violet)	YE (Yellow)	OG (Orange)	BU (Blue)	General Shielding
G3	PVC Cable - 8 Wires	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding
GP	PVC Cable - 12 Wires (incl. G3)	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	BK (Black)	General Shielding
TE	Silicone Cable ⁽⁶⁾ - 8 Wires (incl. G3)	WH (White)	BN (Brown)	GN (Green)	YE (Yellow)	DY (Grey)	PK (Pink)	BU (Blue)	RD (Red)	General Shielding