

AS58 CANOPEN-ANTURI

CanOpen

AS58S-1314CB10RM

Canopen, monikrs, akseli, M12-liitin

- CanOpen ulostulo
- 58mm, akseli- tai reikämalli
- Yksi- (18-bit) tai monikierros (16x14-bit)
- IP65
- M12-liittimellä



TUOTEKUVAUS

LIKAn 58 mm CanOpen-anturi on valittavissa joko akseli- tai reikämallisena. Valikoimassa on myös muita väyliä saatavilla, kysy näistä tarkemmin.

TEKNISET TIEDOT

TIEDOT

Anturin tyyppi	Absoluuttianturi
Kotelon halkaisija	58 mm
Akselin halkaisija	10 mm
Resoluutio	13x14-bit
Liitäntä	M12-liitin
IP-luokka	IP65
Max. pyörimisnopeus	6000 rpm
Min. syöttöjännite DC	10 V DC
Max. syöttöjännite DC	30 V DC
Min. käyttölämpötila	-25 °C
Max. käyttölämpötila	85 °C
Ulostulo	CANopen
Versio	Monikierros

DIP A = BAUD RATE
Default = 1101 = 500Kbit/s, binary value

ON

2	3	4
1	3	4

LSB MSB ON / OFF

DIP B = NODE-ID
Default = 00000001, binary value

ON

2	3	4	5	6	7	8
1						

LSB OFF MSB Not used



RT BUS TERMINATION


ON

1	2
1	2

1 = 2 = ON (first or last device in the network)

OFF

1 = 2 = OFF

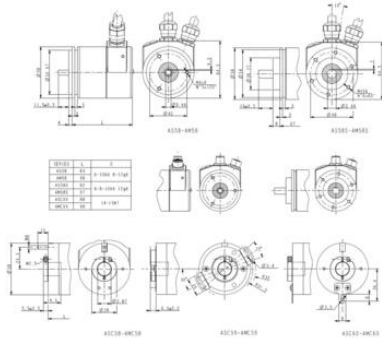


Electrical connection

Description	Terminal	M12 5-pin
CAN Shield	PG	1, shield
+12VDC - +24VDC	V+	2
0VDC	V-	3
CAN HIGH	HD	4
CAN LOW	LD	5

CANopen certified cables core Ø < 1.5mm (0.06")

1 Connect the cable shield to the cable gland.
2 CAN signals (V+/-) referenced, it is not connected to 0VDC supply voltage.



DIP A = BAUD RATE
Default = 1101 = 500Kbit/s, binary value

ON

2	3	4
1	3	4

LSB MSB ON / OFF

DIP B = NODE-ID
Default = 00000001, binary value

ON

2	3	4	5	6	7	8
1						

LSB OFF MSB Not used



RT BUS TERMINATION


ON

1	2
1	2

1 = 2 = ON (first or last device in the network)

OFF

1 = 2 = OFF

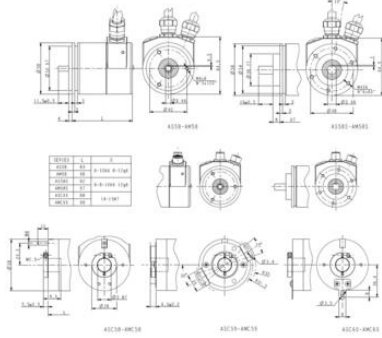

Electrical connection

Description	Terminal	M12 5-pin
CAN Shield	PG	1, shield
+12VDC - +24VDC	V+	2
0VDC	V-	3
CAN HIGH	HD	4
CAN LOW	LD	5

CANopen certified cables core Ø < 1.5mm (0.06")

1 Connect the cable shield to the cable gland.
2 CAN signals (V+/-) referenced, it is not connected to 0VDC supply voltage.

