


MIKROKYTKIN V4

83170002

Mikrokytkin V4, W2

- 0,1-10 A/250 V AC
- Min. virta 1 mA 4 V DC
- Myös sienipainikkeella
- Toimivarsi voidaan asentaa molempiin päihin

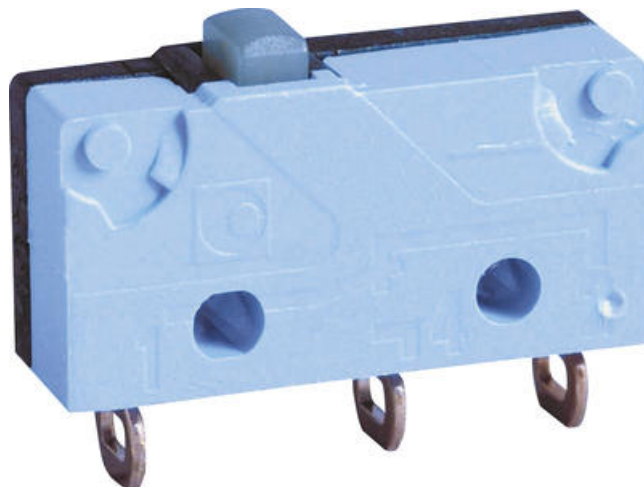

TUOTEKUVAUS

Standardien EN 61058 ja UL 1054 mukainen.

Valittavana toimipäitä 2 mahdollisella kiinnitysasennolla.


TEKNISEET TIEDOT

TIEDOT


Koskettimet	Vaihtokosketin
IP-luokka	IP40
Liitäntä	W2
Nimellisvirta 250 V AC	10 A
Nimellisvirta, 250 V AC	12,5 A
Min. käyttölämpötila	-40 °C
Max. käyttölämpötila	125 °C
Max. käyttövoima	1,8 N
Max. lepoasento	9,2 mm
Max. ohjausvoima	1,5 N
Min. jälkiliikevoima	0,5 mm
Min. paluuliikkeen voima	0,3 N
Max. hystereesi	0,15 mm
Max. jälkiliikevoima	10 N
KytKentäpiste	8,4 ±0,3 mm
Kontaktiväli	0,4 mm

Technical drawing of a mechanical part with dimensions:


- Top horizontal dimension: $13 \pm 0,1$
- Left vertical dimension: $2,4 \pm 0,15$
- Right vertical dimension: $4,3 \pm 0,2$
- Bottom horizontal dimension: $4,1 \pm 0,1$
- Bottom right vertical dimension: $6 \pm 0,15$

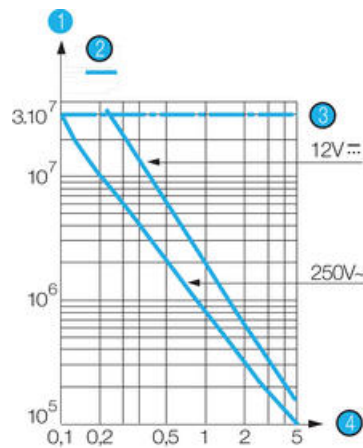

- 1 Number of cycles
- 2 Resistive load
- 3 Mechanical life
- 4 Current (A)

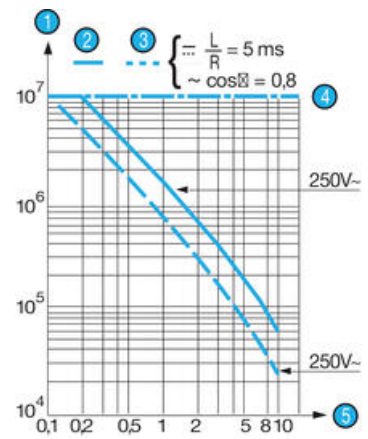

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

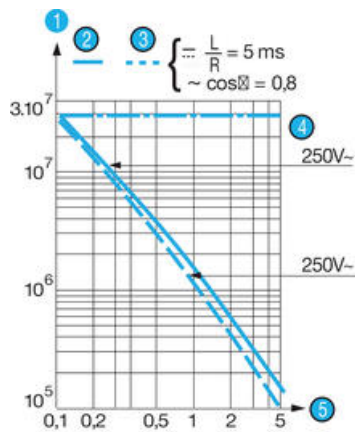

- 1 Number of cycles
- 2 Resistive load
- 3 Inductive load
- 4 Mechanical life
- 5 Current (A)

Partially



Breaking



Conclusion





Technical drawing of a mechanical part with dimensions:


- Overall width: 19.8 ± 0.2
- Top right corner radius: $R 2.5$
- Top left corner radius: $R 2.5$
- Top left corner hole diameter: $\varnothing 2.5 \pm 0.1$
- Top left corner hole position: 2.4 ± 0.1
- Top right corner hole diameter: $\varnothing 2.2 \pm 0.03 (x 3)$
- Top right corner hole position: 7.5 ± 0.2
- Top right corner hole position: 5 ± 0.1
- Top right corner hole position: 9.6 ± 0.2
- Top right corner hole position: 2.4 ± 0.1
- Top right corner hole position: $0.5 \pm 0.03 (x 3)$
- Top right corner hole position: 9.5 ± 0.1
- Top right corner hole position: 6.35 ± 0.2
- Top right corner hole position: 12.2 ± 0.2
- Top right corner hole position: 8.9 ± 0.2
- Top right corner hole position: 2.2 ± 0.1
- Top right corner hole position: 4 ± 0.1
- Top right corner hole position: 6.4 ± 0.2

- $$1 \quad OL = 7.6$$


Mounted with M2 screws
Recommended tightening torque: 2 cm daN

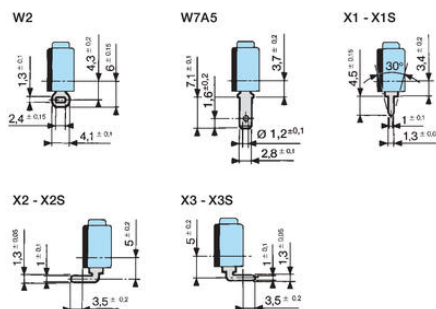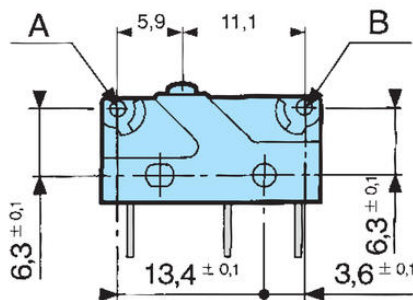


83 170 Symmetrical version

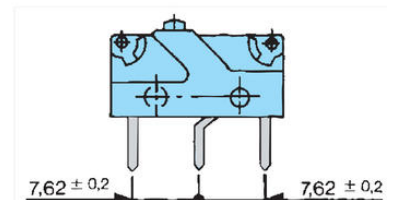

170 E
Arm with roll

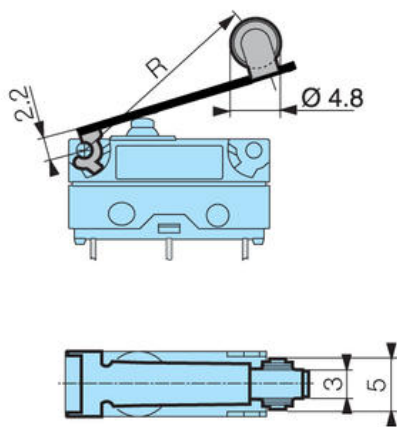

170 A
Straight-arm

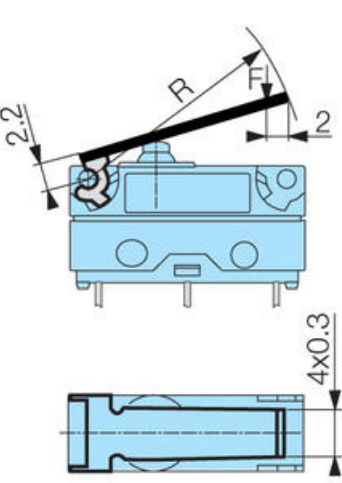

170 F
Arm with simulated scroll

