

KAHVAT JA TARVIKKEET SÄHKÖLUKOILLE

APG1A-111P

Kahva NG-sähkölukolle P-KUBE 2

- Kahvaratkaisut
- Lock out -laitteet
- Liitoskaapelit




TUOTEKUVAUS

Kahvat ja tarvikkeet sähkölukeille


Sturdiness and easy installation

The handle is provided with 8 mm thick sturdy brackets in painted steel. The slots in the brackets allow independent adjustments to be performed. This ensures easy installation, eliminating the need to make changes to structure of the existing guard.
The adjustments make it possible to attach the handle to aluminum profiles or steel frames of various dimensions, from 40 x 40 mm to 80 x 60 mm for the hinge pins (A) and from 20 x 20 mm to 40 x 40 mm for the door (B).
It can be installed both on hinged doors and sliding doors, either with right or left closing.
The handle is supplied with all of the components necessary for fastening at the appropriate distances with tamperproof screws. The installer only has to assemble the components according to the application, fix the selected switch (supplied separately) and make centring adjustments.

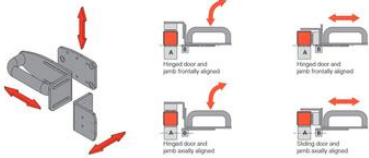

Padlocking option for protecting against errors

The lock out device is simply pushed downwards to expose the holes for mounting padlocks. As a result, padlocks can no longer be mounted incorrectly, since the holes are not exposed until the switch is fully locked. 9 holes for padlocks with a diameter of 7 mm are present. The head of the switch can be quickly rotated in four different directions after loosening the fixing screws, while the lock out device reliably protects on 3 sides. The lock out device can thus be used on hinged and sliding doors - with both right and left closing - without any modification.

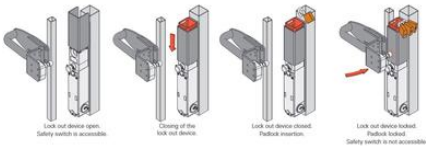

AP G1A-111 • safety handles

