



NAUHAMALLINEN MONIPISTETERMOELEMENTTI

TC95

TC95

Nauhamallinen monipistetermoelementti kiristimellä

- Asiakassovelletut versiot
- Laaja valikoima prosessiliitäntöjä
- Suojataskulla tai ilman
- Vaihdeettava mittaosa
- Jopa 10 mittauspistettä



TUOTEKUVAUS

TEKNISET TIEDOT

Aineen kanssa kosketuksissa olevien osien
materiaali

Alloy, Hiiliteräs


Hyväksynnät

NAMUR, Ex-ia


Materiaali

Ruostumaton teräs 316L, Ruostumaton teräs 316Ti


Multipoint thermometer without thermowell (for installation in a thermowell)

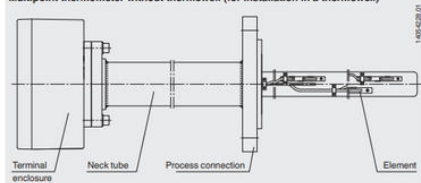


Multipoint thermometer with integrated thermowell

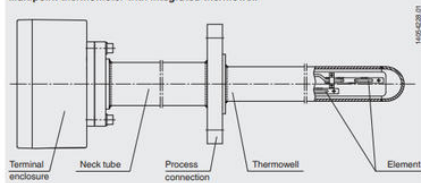

■ Thermowell (option)

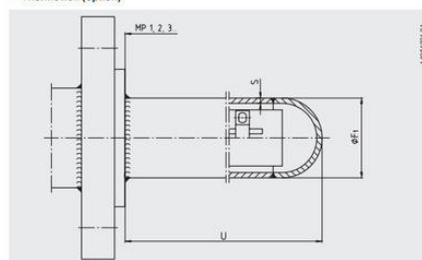


■ Element (flat-steel band design with spring elements)

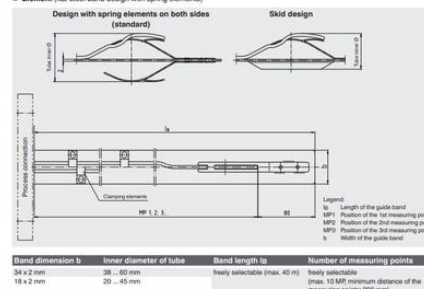


■ Neck tube


Straight tube design

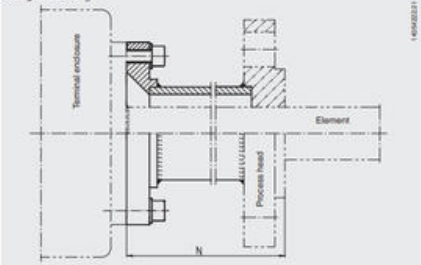


Separable threaded connection (rotatable)

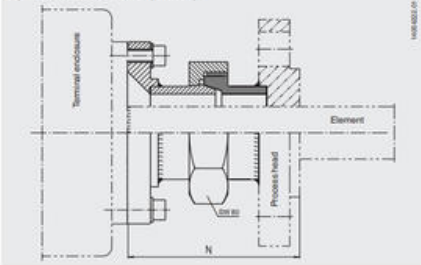


Connection terminals




Transmitters



Transmitter on terminal



Terminal on transmitter on terminal



The actual wiring can deviate from the illustration in the data sheet.

Connection options in the terminal enclosure	Terminal enclosure dimensions in mm		
	cs 160 x 160	cs 192 x 250	cs 250 x 400
Connection terminals	up to 10 MP	up to 10 MP	up to 10 MP
Transmitters	up to 4 MP	up to 8 MP	up to 10 MP
Transmitter on terminal	up to 3 MP	up to 8 MP	up to 10 MP
Terminal on transmitter on terminal	up to 2 MP	up to 4 MP	up to 8 MP