

Date:2025/11/05


UCT series VSSP Communication Protocol  
Specification

|          |                |          |          |       |                                                         |            |            |           |
|----------|----------------|----------|----------|-------|---------------------------------------------------------|------------|------------|-----------|
|          |                |          |          |       |                                                         |            |            |           |
| △        | Correction     |          |          |       | 10                                                      | 2026-04-23 | Momodori   | RS-2537   |
| SYMBOL   | AMENDED REASON |          |          |       | PAGES                                                   | DATE       | AMENDED BY | REFERENCE |
| APPROVED | CHECKED        | DRAFTED  | DESIGNED | TITLE | UCT series VSSP Communication<br>Protocol Specification |            |            |           |
| Yamamoto | Hosoda         | Momodori | Momodori |       | DRAWING NO.<br>C-42-04610                               |            |            | 1 / 25    |

## 1 Overview

The UCT series is a 3D scanning sensor that combines scanning by a mirror and a motor, as shown in the figure below, and supports communication using the Volumetric Scanning Sensor Protocol (VSSP) Version 2.3.

This document describes the VSSP communication specification for the UCT series.

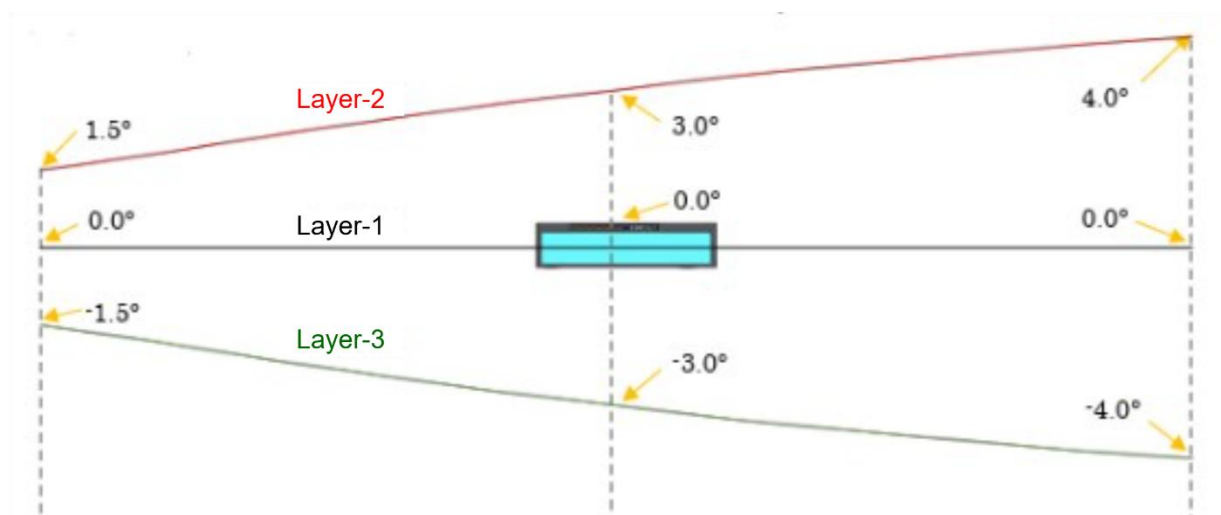

## 2 Communication Method

The session layer uses TCP/IP. Error detection and correction are handled by the layers below the session layer and are not performed by VSSP itself.

Factory default network settings are as follows:

| Item            | Default       | Notes                                  |
|-----------------|---------------|----------------------------------------|
| IP Address      | 192.168.0.10  | (Changeable via IPDiscovery, URGBenri) |
| Subnet Mask     | 255.255.255.0 | (Changeable via IPDiscovery, URGBenri) |
| Default Gateway | 192.168.0.1   | (Changeable via IPDiscovery, URGBenri) |
| Port            | 10940 (fixed) | —                                      |

### 3 Definition of Measurement Data


The unit of measurement data obtained by scanning is defined as follows.

This sensor performs measurements in three layers with different vertical angles. In the VSSP protocol, the set of one layer is called a "line", and the set of three lines (three layers) is called a "frame".

The number of spots per line is 801 spots, from spot 0 to spot 800. When viewing the sensor from the front, the right side corresponds to spot 0.

Names and meanings of measurement data:

| Notation | Meaning                                                                                          |
|----------|--------------------------------------------------------------------------------------------------|
| Echo     | One measurement in a specific direction.                                                         |
| Spot     | All echoes in a specific direction (a group of multiple echoes, equivalent to a "step" in SCIP). |
| Line     | A group of spots for one mirror (one layer).                                                     |
| Frame    | A group of three lines corresponding to one motor scan cycle.                                    |

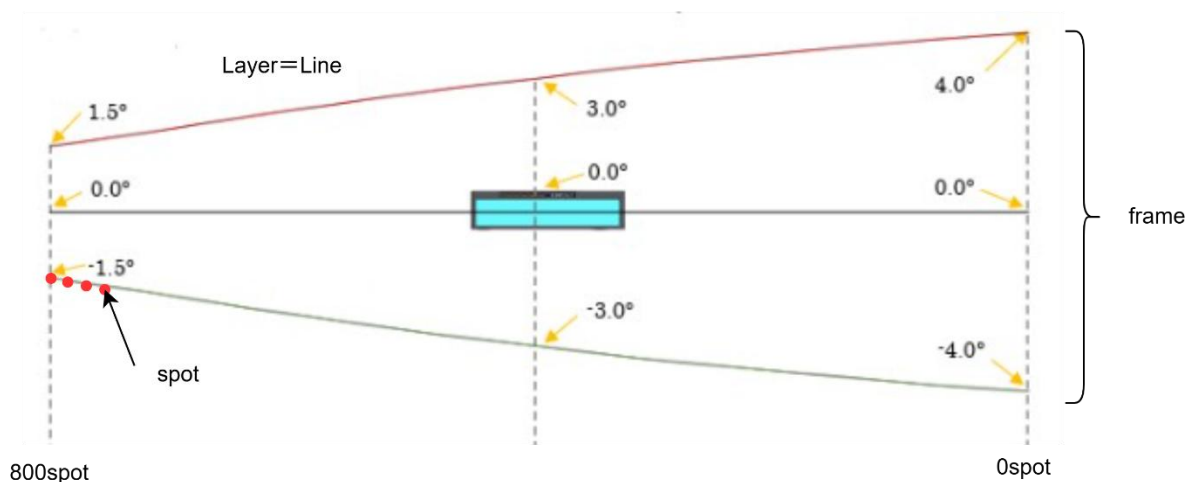

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 3 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

## 4 Vertical Interlacing

To obtain measurement data for all three layers, the vertical interlace count must be set to "3".

The number of vertical interlaces that can be set can be obtained from the parameter "spec.remInterlaceCount". In multi-layer measurement mode it is "3", and in single-layer measurement mode it is "1".

The measurement mode can be changed using AreaDesignerPrime, and the setting is retained even when the power is turned off.

In VSSP, layers 1, 2, and 3 are referred to as vertical fields 1, 2, and 3 respectively.

## 5 Data Representation Format

VSSP uses both human-readable character strings and binary data. In this document, the notation of data is defined as follows.

| Notation | Meaning                                                                                    |
|----------|--------------------------------------------------------------------------------------------|
| 'A'      | A fixed readable character of 1 byte (for example, the character 'A').                     |
| "ABC"    | A fixed character string.                                                                  |
| C(n)     | A readable character string of n bytes (for example, C(4): a 4-character readable string). |
| C(*)     | A variable-length readable character string.                                               |
| LF       | Line feed = 0x0A.                                                                          |
| CR       | Carriage return = 0x0D.                                                                    |
| RT       | Terminator = LF, CR, or LF + CR.                                                           |
| U8       | Unsigned 1-byte integer.                                                                   |
| U16      | Unsigned 2-byte integer, little-endian.                                                    |
| S16      | Signed 2-byte integer, little-endian.                                                      |
| U32      | Unsigned 4-byte integer, little-endian.                                                    |
| S32      | Signed 4-byte integer, little-endian.                                                      |
| RSV      | Reserved area. Empty data = 0x00.                                                          |

Note: Data is aligned so that the total size is a multiple of 4 bytes (4-byte alignment).

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 4 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

## 6 Commands

Commands consist of request commands sent from the host to the sensor and response commands sent from the sensor to the host. VSSP response commands are classified into three types:

- Handshake type
- Continuous data transmission type
- Spontaneous error notification type

### 6.1 Basic Format

Basic format of a request command:

#### 【Request Command】

|                    |                  |    |
|--------------------|------------------|----|
| command code(C(3)) | parameters(C(*)) | RT |
|--------------------|------------------|----|

- command code: A 3-character string that indicates the command to execute.
- parameters: Parameters for the command. The length and meaning depend on the command.
- RT: Request terminator (one character of CR or LF, or two characters of CR+LF). When a request command is echoed back in a response command, the terminator of the echoed request is always LF.

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 5 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

Basic format of a response command:

**【Response Command】**

|                   |                     |                        |                         |              |    |                    |
|-------------------|---------------------|------------------------|-------------------------|--------------|----|--------------------|
| “VSSP”            |                     | packet type(C(3))      | “:                      | status(C(3)) | LF | VSSP common header |
| header bytes(U16) | response bytes(U16) | request timestamp(U32) | response timestamp(U32) |              |    |                    |
| data              |                     |                        |                         |              |    |                    |

- packet type: Type of packet.
- status: Status code.

| Category              | Code  | Description                       |
|-----------------------|-------|-----------------------------------|
| Normal                | “000” | Works well                        |
|                       | “021” | Internal process overload timeout |
|                       | “022” | Transmission timeout              |
|                       | “098” | Sleeping                          |
|                       | “099” | Initializing...                   |
| Request command error | “101” | Command is unknown                |
|                       | “102” | Command structure is mismatch     |
|                       | “103” | Command parameter is mismatch     |
|                       | “104” | Command parameter is out of range |
|                       | “105” | Element count is mismatch         |
|                       | “106” | Couldn't get this parameter       |
| System error          | “201” | System boot failed                |
|                       | “202” | System fault                      |

- header bytes: Number of bytes in the header (24 fixed).
- response bytes: Total number of bytes in the response command.
- request timestamp: Timestamp when the request command was received [ms].
- response timestamp: Timestamp when the response command was sent [ms].
- data: Response data for each command (some commands have no data).

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 6 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

## 6.2 Response Check (PNG Command)

This command is used only to confirm that a response can be returned; it does not return any special information.

### 【Request Command】

|       |    |
|-------|----|
| "PNG" | RT |
|-------|----|

### 【Response Command】

|                    |
|--------------------|
| VSSP common header |
|--------------------|

- VSSP common header (packet type: "PNG")

## 6.3 Version Information (VER Command)

This command obtains a set of version-related parameters that can also be obtained by the GET command.

### 【Request Command】

|       |    |
|-------|----|
| "VER" | RT |
|-------|----|

### 【Response Command】

|                    |     |                        |    |
|--------------------|-----|------------------------|----|
| VSSP common header |     |                        |    |
| "vend"(C(4))       | “:” | vendor name(C(*))      | LF |
| "prod"(C(4))       | “:” | product name(C(*))     | LF |
| "firm"(C(4))       | “:” | firmware version(C(*)) | LF |
| "prot"(C(4))       | “:” | protocol version(C(*)) | LF |
| "seri"(C(4))       | “:” | serial number(C(*))    | LF |

- VSSP common header (packet type: "VER")
- vendor name: Vendor name.
- product name: Product model.
- firmware version: Firmware version.
- protocol version: Protocol version.
- serial number: Serial number.

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 7 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

## 6.4 Get Parameters (GET Command)

This command reads the value of a parameter. See the parameter table on the next pages for the types of parameters.

### 【Request Command】

|       |     |                         |    |
|-------|-----|-------------------------|----|
| "GET" | “.” | parameter<br>name(C(*)) | RT |
|-------|-----|-------------------------|----|

- parameter name: Parameter name (see parameter table).

### 【Response Command】

|                       |    |
|-----------------------|----|
| VSSP common header    |    |
| echo back(C(*))       | LF |
| parameter value(C(*)) | LF |
| parameter value(C(*)) | LF |
| ...                   |    |

- VSSP common header (packet type: "GET")
- echo back: Echoed request command (terminator converted to LF).
- parameter value: Parameter values (at least one line; may span multiple lines).

## 6.5 Set Parameters (SET command)

This command writes a value to a parameter. Parameters that can be written are listed in the parameter table.

### 【Request Command】

|       |     |                          |     |                           |    |
|-------|-----|--------------------------|-----|---------------------------|----|
| "SET" | “.” | parameter<br>name (C(*)) | “=” | parameter<br>value (C(*)) | RT |
|-------|-----|--------------------------|-----|---------------------------|----|

- parameter name: Parameter name (RW parameters in the parameter table).
- parameter value: Value to be written to the parameter.

### 【Response Command】

|                    |    |
|--------------------|----|
| VSSP common header |    |
| echo back(C(*))    | LF |

- VSSP common header (packet type: "SET")
- echo back: Echoed request command (terminator converted to LF).

|       |                                                         |                |            |        |
|-------|---------------------------------------------------------|----------------|------------|--------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 8 / 25 |
|-------|---------------------------------------------------------|----------------|------------|--------|

● Parameter Table

There are two types of parameters: read-only parameters and read/write parameters.

In the parameter list they are indicated as follows.

| Type | Meaning                                     |
|------|---------------------------------------------|
| RO   | Read-only parameter (read only parameter)   |
| RW   | Read/write parameter (read/write parameter) |

The parameters are listed below.

| parameter                                                                                                       | Type                    | Description                                                                                                                                                                                                                                     |                            |         |        |                            |        |                            |        |                            |
|-----------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|--------|----------------------------|--------|----------------------------|--------|----------------------------|
| “vend”                                                                                                          | RO                      | Vendor name.                                                                                                                                                                                                                                    |                            |         |        |                            |        |                            |        |                            |
| “prod”                                                                                                          | RO                      | Product name.                                                                                                                                                                                                                                   |                            |         |        |                            |        |                            |        |                            |
| “firm”                                                                                                          | RO                      | Firmware version.                                                                                                                                                                                                                               |                            |         |        |                            |        |                            |        |                            |
| “prot”                                                                                                          | RO                      | Protocol version.                                                                                                                                                                                                                               |                            |         |        |                            |        |                            |        |                            |
| “seri”                                                                                                          | RO                      | Serial number.                                                                                                                                                                                                                                  |                            |         |        |                            |        |                            |        |                            |
| “_itv”                                                                                                          | RW                      | Vertical interlacing setting.                                                                                                                                                                                                                   |                            |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         | The following character strings specify each setting:                                                                                                                                                                                           |                            |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         | <table><tr><th>Setting value</th><th>Meaning</th></tr><tr><td>“0,01”</td><td>Vertical interlace count 1</td></tr><tr><td>“0,02”</td><td>Vertical interlace count 2</td></tr><tr><td>“0,03”</td><td>Vertical interlace count 3</td></tr></table> | Setting value              | Meaning | “0,01” | Vertical interlace count 1 | “0,02” | Vertical interlace count 2 | “0,03” | Vertical interlace count 3 |
|                                                                                                                 |                         | Setting value                                                                                                                                                                                                                                   | Meaning                    |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         | “0,01”                                                                                                                                                                                                                                          | Vertical interlace count 1 |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         | “0,02”                                                                                                                                                                                                                                          | Vertical interlace count 2 |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         | “0,03”                                                                                                                                                                                                                                          | Vertical interlace count 3 |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |
| The available setting range depends on the sensor. For this sensor it is as follows:                            |                         |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |
| <table><tr><th>Sensor</th><th>Available setting range</th></tr><tr><td>UCT series</td><td>1～3</td></tr></table> | Sensor                  | Available setting range                                                                                                                                                                                                                         | UCT series                 | 1～3     |        |                            |        |                            |        |                            |
| Sensor                                                                                                          | Available setting range |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |
| UCT series                                                                                                      | 1～3                     |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |
|                                                                                                                 |                         |                                                                                                                                                                                                                                                 |                            |         |        |                            |        |                            |        |                            |

|                                                      |                 |                                                                                       |                                                                                                                                                                                                                                                |
|------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “tblh[00]”<br>“tblh[01]”<br>“tblh[02]”<br>“tblh[03]” | ⚠<br><br><br>RO | Horizontal direction coordinate conversion table (single layer)                       |                                                                                                                                                                                                                                                |
|                                                      |                 | Usage                                                                                 | Used for calculating the horizontal direction (angle) of each spot in a line.The index n corresponds to a spot group divided into 256 spots.<br><br>Example:<br>tblh[01] : horizontal-direction coordinate conversion table for spots 256–511. |
|                                                      |                 | Numerical value                                                                       | For each spot in the line, this is the horizontal offset from the first spot in the line, represented as a 16-bit value where the first spot is 0 and the last spot is 65535 (relative-angle table).                                           |
|                                                      |                 | Value representation                                                                  | Numeric representation: readable hexadecimal characters<br>Separator: “,” (comma)<br>Spot groups:<br>[00] 0–255 spots<br>[01] 256–511 spots<br>[02] 512–767 spots<br>[03] 768–800 spots                                                        |
| “tblv[00]”<br>“tblv[01]”<br>“tblv[02]”<br>“tblv[03]” | ⚠<br><br><br>RO | Vertical direction coordinate conversion table (common to single-layer / multi-layer) |                                                                                                                                                                                                                                                |
|                                                      |                 | Usage                                                                                 | Vertical direction coordinate conversion table (common to single-layer / multi-layer)<br><br>Example:<br>tblv[01] : vertical-direction coordinate conversion table for spots 256–511.                                                          |
|                                                      |                 | Numerical value                                                                       | The vertical direction is expressed as the absolute angle seen from the sensor, with 0° in the vertical direction and the left direction taken as positive, covering 0–360° represented as a 16-bit value (absolute-angle table).              |
|                                                      |                 | Value representation                                                                  | Numeric representation: readable hexadecimal characters<br>Separator: “,” (comma)<br>Spot groups:<br>[00] 0–255 spots<br>[01] 256–511 spots<br>[02] 512–767 spots<br>[03] 768–800 spots                                                        |

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 10 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

|                                                                                                                                                                      |    |                                                                                                                   |                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “tv00[00]”<br>“tv00[01]”<br>“tv00[02]”<br>“tv00[03]”<br>“tv01[00]”<br>“tv01[01]”<br>“tv01[02]”<br>“tv01[03]”<br>“tv02[00]”<br>“tv02[01]”<br>“tv02[02]”<br>“tv02[03]” | RO | Vertical direction coordinate conversion table (multi-layer)                                                      |                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                      |    | Usage                                                                                                             | Used for calculating the vertical direction (sensor rotation direction) of each spot in a line.The characters that follow tv indicate the vertical interlace number.<br>The index n indicates a spot group divided into 256 spots.<br>Example:<br>tv01[01] : vertical-direction coordinate conversion table for Layer 2, spots 256–511. |
|                                                                                                                                                                      |    | Numerical value                                                                                                   | For each spot in the line, this is the vertical offset from the first spot in the line.It is represented as a 16-bit value whose first spot is 0 and last spot is 65535 (relative-angle table).                                                                                                                                         |
|                                                                                                                                                                      |    | Value representation                                                                                              | Numeric representation: readable hexadecimal characters<br>Separator: “,” (comma)<br>Spot groups:<br>[00] 0–255 spots<br>[01] 256–511 spots<br>[02] 512–767 spots<br>[03] 768–800 spots                                                                                                                                                 |
|                                                                                                                                                                      |    | Returns the transmission status of the measurement data.<br>For details of the measurement data, see Section 6.6. |                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                      |    | Value                                                                                                             | Meaning                                                                                                                                                                                                                                                                                                                                 |
|                                                                                                                                                                      |    | ‘0’                                                                                                               | Transmission stopped                                                                                                                                                                                                                                                                                                                    |
|                                                                                                                                                                      |    | ‘1’                                                                                                               | Transmitting                                                                                                                                                                                                                                                                                                                            |
|                                                                                                                                                                      |    | Example:When only _ro (distance-only data) is being transmitted<br>_ro=1<br>_ri=0<br>ax=0                         |                                                                                                                                                                                                                                                                                                                                         |

|          |    |                                                                                                                                                                                                |  |                                                      |                                  |       |
|----------|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------|----------------------------------|-------|
| “stat”   | RO | Returns whether measurement of the data is possible.<br>For details of the measurement data, see Section 6.6.                                                                                  |  |                                                      |                                  |       |
|          |    | Setting value                                                                                                                                                                                  |  | Meaning                                              |                                  |       |
|          |    | “000;Works well”                                                                                                                                                                               |  | Measurement possible                                 |                                  |       |
|          |    | “099;Initializing...”                                                                                                                                                                          |  | Measurement not possible<br>(during startup)         |                                  |       |
|          |    | “105;Command is not currently available”                                                                                                                                                       |  | Measurement not possible<br>(sensor in standby mode) |                                  |       |
|          |    | “202;System fault”                                                                                                                                                                             |  | Measurement not possible<br>(sensor failure)         |                                  |       |
|          |    | Example) When all data can be measured<br>_ro=000;Works well<br>_ri=000;Works well<br>_ax=000;Works well                                                                                       |  |                                                      |                                  |       |
| “swdr”   | RO | Represents the scanning direction. For this sensor the value is fixed to 1.                                                                                                                    |  |                                                      |                                  |       |
| “spec.*” | RO | Parameter for obtaining sensor specification information.<br>By substituting the * in spec.* with one of the specification item names shown below, each piece of information can be retrieved. |  |                                                      |                                  |       |
|          |    | Name                                                                                                                                                                                           |  | Type                                                 | Meaning                          | Value |
|          |    | “spec.remInterlaceCount”                                                                                                                                                                       |  | Decimal integer                                      | Maximum vertical interlace count | 3     |
|          |    | “spec.firstLineNumber”                                                                                                                                                                         |  | Decimal integer                                      | Measurement start line number    | 0     |
|          |    | “spec.lastLineNumber”                                                                                                                                                                          |  | Decimal integer                                      | Measurement end line number      | 0     |
|          |    | “spec.spotCount”                                                                                                                                                                               |  | Decimal integer                                      | Maximum number of spots          | 801   |
|          |    | “spec.echoCount”                                                                                                                                                                               |  | Decimal integer                                      | Maximum number of echoes         | 3     |
|          |    | “spec.accelScale”                                                                                                                                                                              |  | Decimal integer                                      | Accelerometer scale [g]          | 16    |
|          |    | “spec.gyroScale”                                                                                                                                                                               |  | Decimal integer                                      | Gyroscope scale[dps]             | 2000  |

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 12 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

## 6.6 Start/Stop Measurement Data Acquisition (DAT Command)

This command starts or stops acquisition of measurement data. After the response to the DAT command, the requested measurement data is sent from the sensor to the host in continuous transmission format. Only the first response contains the VSSP common header and an echo back of the request command; subsequent responses are sent only in the continuous data formats described in Sections 6.6.1 and 6.6.2.

### 【Request Command】

|       |     |                 |     |             |    |
|-------|-----|-----------------|-----|-------------|----|
| “DAT” | ‘:’ | data type(C(2)) | ‘=’ | state(C(1)) | RT |
|-------|-----|-----------------|-----|-------------|----|

➤ data type : Measurement data format

| data type | Meaning            |
|-----------|--------------------|
| “ro”      | distance-only      |
| “ri”      | distance+intensity |
| “ax”      | auxiliary          |

➤ state : Start/stop state. A value that selects whether to start or stop transmission of the specified data type.

| state | Meaning | Remarks                                                                                                                                                                                                                                            |
|-------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ‘0’   | Stop    | <ul style="list-style-type: none"><li>• For ro and ri, specifying either one stops acquisition of data in both formats.</li><li>• For ax, only acquisition of ax data is stopped (it does not affect the acquisition state of ro or ri).</li></ul> |
| ‘1’   | Start   | <ul style="list-style-type: none"><li>• For ri and ro, the setting that is configured later takes effect.</li><li>• Starting ax begins acquisition of ax data (it does not affect the acquisition state of ro or ri).</li></ul>                    |

### 【Response Command】

|                    |    |
|--------------------|----|
| VSSP common header |    |
| echo back(C(*))    | LF |

- VSSP common header (packet type: "DAT")
- echo back of the request command (terminator converted to LF)

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 13 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

### 6.6.1 ro/ri Format Data (\_ro / \_ri Response Command)

These are the distance or distance+intensity data that are sent continuously in response to a DAT start request. The distance-only format is returned as an "\_ro" packet and the distance+intensity format is returned as an "\_ri" packet.

#### 【Response Command】

|                                  |
|----------------------------------|
| VSSP common header               |
| Distance measurement data header |
| Echo index array                 |
| Measurement data array           |

- VSSP common header (packet type: "\_ro"/"\_ri")

#### 【Distance measurement data header】

| header bytes(U16)   | head timestamp(U32) |                          |               | tail timestamp(U32) |                        |                            | head direction(U16) |
|---------------------|---------------------|--------------------------|---------------|---------------------|------------------------|----------------------------|---------------------|
| tail direction(U16) | frame num(U8)       | horizontal field num(U8) | line num(U16) | head spot num(U16)  | vertical field num(U8) | vertical interlace num(U8) | RSV(U16)            |

- header bytes: Number of bytes in the distance measurement data header.
- head timestamp: Timestamp of the first spot in the line [ms].
- tail timestamp: Timestamp of the last spot in the line [ms].
- head direction: Vertical angle of the first spot in the line. The front direction is 0°, upward is positive, and the range 0–360° is represented as a 16-bit value.
- tail direction: Vertical angle of the last spot in the line. The front direction is 0°, upward is positive, and the range 0–360° is represented as a 16-bit value.
- frame num: Frame number (fixed to 0 for this sensor).
- horizontal field num: Horizontal field number (fixed to 0 for this sensor).
- line num: Line number (fixed to 1 for this sensor).
- head spot num: Spot number of the first data in this line.
- vertical field num: Vertical field index. This field is present only when the vertical interlace count is 2 or greater.
- vertical interlace num: Vertical interlace count. This field is present only when the vertical interlace count is 2 or greater.

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 14 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

### 【Echo index array】

|                              |                       |                       |                       |                   |
|------------------------------|-----------------------|-----------------------|-----------------------|-------------------|
| echo index array<br>num(U16) | spot num(U16)         | spot position[0](U16) | spot position[1](U16) | ...               |
| ...                          | spot position[n](U16) | all echo num(U16)     | RSV* <sup>1</sup>     | RSV* <sup>1</sup> |

- echo index array num: Byte length of the echo index array.
- spot num: Number of spots included in this data.
- spot position[0], spot position[1], ..., spot position[n]: For each spot, the position of the first echo in the expanded measurement data array. The number of elements is equal to spot num.
- all echo num: Total number of echoes in this line.

\*1 The echo index array may include reserved (padding) bytes so that the total size of the array is aligned in 32-bit units, depending on the number of spots.

### 【Measurement data array】

|                             |                             |                             |     |                             |
|-----------------------------|-----------------------------|-----------------------------|-----|-----------------------------|
| measurement<br>data[0](U16) | measurement<br>data[1](U16) | measurement<br>data[2](U16) | ... | measurement<br>data[n](U16) |
|-----------------------------|-----------------------------|-----------------------------|-----|-----------------------------|

For **\_ro** (distance-only) format, the measurement data array contains distance values only.

For **\_ri** (distance+intensity) format, the measurement data array contains alternating distance and intensity values.

Specifically:

- **\_ro** format: measurement\_data[0], measurement\_data[1], ..., measurement\_data[n]

Each element is a distance value [mm]. A total of all\_echo\_num distances are stored.

- **\_ri** format: measurement\_data[0], measurement\_data[1], ..., measurement\_data[2 \* n + 1]

Even-indexed elements (0, 2, 4, ...) are distance values [mm].

Odd-indexed elements (1, 3, 5, ...) are intensity values.

A concrete example of an **\_ri** response and detailed explanation of the echo index array and measurement data array is given in the Appendix (section 7.1).

|           |                                                         |                |            |         |
|-----------|---------------------------------------------------------|----------------|------------|---------|
| T I T L E | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 15 / 25 |
|-----------|---------------------------------------------------------|----------------|------------|---------|

## 6.6.2 ax Format Data (\_ax Response Command)

Auxiliary sensor data (such as angular velocity and acceleration) is sent continuously in response to a DAT start request for auxiliary data. This data is returned in packets with packet type "\_ax".

### 【Response Command】

|                              |
|------------------------------|
| VSSP common header           |
| Auxiliary sensor data header |
| Auxiliary sensor data        |

- VSSP common header (packet type: "\_ax")


### 【Auxiliary sensor data header】

|                      |                        |                   |                 |            |
|----------------------|------------------------|-------------------|-----------------|------------|
| header<br>bytes(U16) | head<br>timestamp(U32) | data<br>type(U32) | data<br>num(U8) | period(U8) |
|----------------------|------------------------|-------------------|-----------------|------------|

- header bytes: Number of bytes in the auxiliary sensor data header (12 bytes).
- head timestamp: Timestamp of the first auxiliary data sample [ms].
- data type: Bit field that represents the type of data contained in the auxiliary data array. For this sensor, bits 32–27 are used, so the data type is always "0xFC000000".

| Bit  | Description        |
|------|--------------------|
| 32   | Angular velocity X |
| 31   | Angular velocity Y |
| 30   | Angular velocity Z |
| 29   | Acceleration X     |
| 28   | Acceleration Y     |
| 27   | Acceleration Z     |
| 26~1 | Reserved           |

The axes for angular velocity and acceleration are defined so that the sensor's front, left, and upward directions correspond to the positive X, Y, and Z axes respectively.

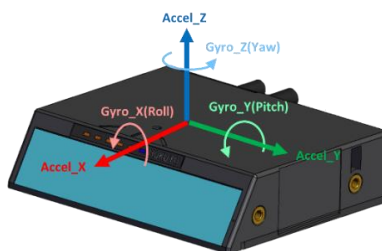

- data num: Number of auxiliary data samples contained in this packet.
- period: Time interval between auxiliary data samples [ms].

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 16 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

【Auxiliary sensor data】

|              |              |     |              |
|--------------|--------------|-----|--------------|
| data[0](S32) | data[1](S32) | ... | data[5](S32) |
|--------------|--------------|-----|--------------|

| Data name | Contents           | Remarks                                                                                                                                                                             |
|-----------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| data[0]   | Angular velocity X | A value in the range $\pm 2000$ dps is represented as a signed 16-bit integer (-32768 to 32767).<br>Example when the value is 10000:<br>$10000 \times 2000 / 32768 = 610.35$ [dps]. |
| data[1]   | Angular velocity Y | A value in the range $\pm 2000$ dps is represented as a signed 16-bit integer (-32768 to 32767).                                                                                    |
| data[2]   | Angular velocity Z | A value in the range $\pm 2000$ dps is represented as a signed 16-bit integer (-32768 to 32767).                                                                                    |
| data[3]   | Acceleration X     | A value in the range $\pm 16$ g is represented as a signed 16-bit integer (-32768 to 32767). Example when the value is 10000:<br>$10000 \times 16 / 32768 = 4.88$ [g]               |
| data[4]   | Acceleration Y     | A value in the range $\pm 16$ g is represented as a signed 16-bit integer (-32768 to 32767).                                                                                        |
| data[5]   | Acceleration Z     | A value in the range $\pm 16$ g is represented as a signed 16-bit integer (-32768 to 32767).                                                                                        |

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 17 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

## 6.7 Reboot (RST Command)

This command restarts the sensor. The behavior is equivalent to turning the power off and on again.

### 【Request Command】

|       |    |
|-------|----|
| "RST" | RT |
|-------|----|

### 【Response Command】

|                    |
|--------------------|
| VSSP common header |
|--------------------|

- VSSP common header (packet type: "RST")

## 6.8 Error Information (ERR Command)

When the sensor receives an undefined command, a command with an invalid format, or when it cannot return a normal response to a request command because of its internal state, it returns an "ERR" response command instead of the normal response.

### 【Response Command】

|                    |    |
|--------------------|----|
| VSSP common header |    |
| echo back(C(*))    | LF |
| information(C(*))  | LF |
| ...                |    |
| information(C(*))  | LF |

- VSSP common header  
(packet type: "ERR")  
(status: a non-"0\*\*" status code indicating the error condition; see the status list)
- echo back: Echoed request command (with the terminator converted to LF).
- information: Error information. Contains one or more lines of text and may span multiple lines.

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 18 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

## 6.9 \_er Format Data (\_er Response Command)

This is a spontaneous notification that the sensor sends when its internal error state changes. It is not a response to a specific request command.

### 【Response Command】

|                    |    |
|--------------------|----|
| VSSP common header |    |
| information(C(*))  | LF |
| ...                |    |
| information(C(*))  | LF |

- VSSP common header  
(packet type: "\_er")  
(status: a non-"0\*\*" status code indicating the current error condition)
- information: Error information. Contains one or more lines of text and may span multiple lines.

7 Appendix

7.1 Explanation of Measurement Data Acquisition Commands

Section 6.6.1 describes the format of the measurement data. This appendix shows a concrete example of an \_ri-format distance+intensity data packet in both binary and ASCII, and explains each part. Only the continuous-transmission response format is described here.

An \_ri response packet consists of the following four blocks in order:

- 1) VSSP common header
- 2) Distance measurement data header
- 3) Echo index array
- 4) Measurement data array

All data from block (3) onward is binary. Multi-byte values are encoded in little endian.

7.1.1 VSSP common header

In the example communication log shown in the original document, the highlighted portion corresponds to the VSSP common header. The left column is a hexadecimal byte index, the middle column is binary data, and the right column is the ASCII representation.

|      |                                                     |                      |
|------|-----------------------------------------------------|----------------------|
| 0030 | 0b 68 7f 3a 00 00 56 53 53 50 5f 72 69 3a 30 30     | ·h· · ·VS SP _ri:00  |
| 0040 | 30 0a 18 00 24 04 24 37 59 00 04 38 59 00 18 00     | 0 · · ·\$·\$7 Y· ① ② |
| 0050 | de 82 82 ③ c d6 ④ 7 82 5c ⑤ 2 23 6b 1a ⑥ 3 11 03 00 | ···\···\ ·#k·@···    |
| 0060 | 00 00 00 04 2d 00 7c 01 bb 00 00 00 01 00 02 00     | ····· · ······       |

In this example:

- ① packet type = "\_ri"
- ② status = "000" (normal)
- ③ header bytes = 0x0018 = 24 bytes (20 bytes for this sensor)
- ④ response bytes = 0x0424 = 1060 bytes
- ⑤ request timestamp = 0x00593724
- ⑥ response timestamp= 0x00593804

### 7.1.2 Distance measurement data header

In the example log, the distance measurement data header immediately follows the common header. It contains fields such as head timestamp, tail timestamp, head direction, tail direction, frame number, horizontal field number, line number, head spot number, vertical field number, and vertical interlace number.

|      |                         |                          |                     |
|------|-------------------------|--------------------------|---------------------|
| 0030 | 0b 68 7f 3a 00 00 56 53 | 53 50 5f 72 69 3a 3 ⑦ 30 | ·h·:·:·V\$ SP_ri:00 |
| 0040 | 30 0:⑧18 00 24 04⑨4 37  | !⑩00 ⑪38 ⑫⑬18 00         | 0·:·\$·\$7 Y·:8Y·:· |
| 0050 | de 82 82 5c d6 87 82 5c | 92 23 6b 1a 40 11 03 00  | ·:·\·:·\·:·#k·@·:·  |
| 0060 | 00 00 00 04 2d 00 7c 01 | bb 00 00 00 01 00 0:⑭00  | ·:·:·:· ·:·:·:·     |
|      | ⑮ ⑯ ⑰ ⑱                 |                          |                     |

In this example:

- ⑦ Header byte count 0x0018 = 24 (Note 1)
- ⑧ Timestamp of the first spot in the line 0x5c8282de
- ⑨ Timestamp of the last spot in the line 0x5c8287d6
- ⑩ Vertical direction of the first spot in the line  $0x2392 = 9106 \rightarrow 9106 \times 360 / 65535 = 50.0^\circ$  (Note2)
- ⑪ Vertical direction of the last spot in the line  $0x1a6b = 6763 \rightarrow 6763 \times 360 / 65535 = 37.15^\circ$  (Note2)
- ⑫ Frame number  
0x40 = 64
- ⑬ Horizontal field number  
0x11 = 17 (for this sensor it is fixed to 0)
- ⑭ Line number  
0x0003 = 3 (for this sensor it is fixed to 1)
- ⑮ Head spot number of the line  
0x0000 = 0
- ⑯ Vertical field number  
0x00 = 0
- ⑰ Vertical interlace count  
0x04 = 4 (maximum is 3 for this sensor)
- ⑱ Reserved

#### Notes

Note 1: When the horizontal interlace count is 1, the size is 20 bytes and items ⑯, ⑰, and ⑱ are omitted.

Note 2: Angles are defined with the front direction as  $0^\circ$ , and upward as the positive direction.

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 21 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

7.1.3 Echo index array

The echo index array follows the distance header. In the example log, the highlighted part shows the echo index array, whose structure is:

|      |                                      |                                                  |                     |
|------|--------------------------------------|--------------------------------------------------|---------------------|
| 0030 | 0b 68 7f 3a 00 00 56 53              | 53 50 5f 72 69 3a 30 30                          | ·h·:·:V\$ SP_ri:00  |
| 0040 | 30 0a 18 00 24 04 24 37              | 59 00 04 38 59 00 18 00                          | 0-·-\$·\$7 Y··8Y··· |
| 0050 | de 82 82 5c d6 87 82 <sup>⑰</sup> c  | 9 <sup>⑳</sup> 23 6t <sup>㉑</sup> la 40 11 03 00 | ···\···\··#k·@···   |
| 0060 | 00 00 00 04 2d 00 7c 01              | bb 00 00 00 01 00 02 00                          | ···-·· ···          |
| 0070 | 03 00 04 00 05 00 06 00              | 07 00 08 00 09 00 0a 00                          | ······              |
| :    |                                      |                                                  |                     |
| 01d0 | 96 00 97 00 98 00 99 00              | 9a 00 9b 00 9c 00 9d 00                          | ······              |
| 01e0 | 9e 00 6d 04 dc 01 6f 04              | e0 01 70 04 e8 01 64 <sup>㉒</sup> 14             | ··m··o··p··d·       |
| 01f0 | e4 <sup>㉓</sup> 11 6c 04 e4 01 53 04 | e8 01 4a 04 d4 01 6c 04                          | ··l··S··J··l·       |
| 0200 | e4 01 60 04 e0 01 6a 04              | dc 01 66 04 e0 01 6a 04                          | ··`··j··f··j·       |

- ⑰ echo index array bytes = 0x017C = 380
- ⑳ spot num = 0x00BB = 187
- ㉑ spot position[i] = first echo position for spot i in the expanded data array
- ㉒ all echo num = total number of echoes
- ㉓ reserved = padding so that the array length is aligned to 32-bit units

The spot position array is used to locate the echo data for each spot in the measurement data array. Depending on the number of spots, reserved bytes are used so that the echo index array is aligned to a 32-bit boundary.

### 7.1.4 Measurement data array and access procedure

For an \_ri distance+intensity packet, the measurement data array contains alternating distance and intensity values. The echo index array and data array can be used together to access all echoes for any given spot. Consider the following example:

line = 1

head spot number = 0

index[] = {0, 1, 3, 5, 5, ...}

data[] = {100, 30, 150, 20, 180, 35, 102, 22, 103, 31, 111, 27, ...}

For \_ri data, multiplying each index element by 2 gives the start position of each spot's data in the measurement data array: {0, 2, 6, 10, 10, ...}. (For \_ro data, the index values are used directly without multiplying by 2.)

| line1 |               |       |               |       |               |       |               |       |               |       |               |
|-------|---------------|-------|---------------|-------|---------------|-------|---------------|-------|---------------|-------|---------------|
| spot0 |               | spot1 |               |       |               | spot2 |               |       |               | spot4 |               |
| echo1 |               | echo1 |               | echo2 |               | echo1 |               | echo2 |               | echo1 |               |
| range | inte<br>nsity | range | inte<br>nsity | range | inte<br>nsity | range | inte<br>nsity | range | inte<br>nsity | range | inte<br>nsity |
| 100   | 30            | 150   | 20            | 180   | 35            | 102   | 22            | 103   | 31            | 111   | 27            |

Thus, the data for each spot can be obtained as follows (C-like pseudocode):

```
/* Number of echoes in spot i */
```

```
echo_count = index[i + 1] - index[i];
```

```
/* If index[i] == index[i + 1], there is no echo for this spot. */
```

```
/* Access all echoes of spot i */
```

```
for (p = index[i], echo = 0; p < index[i + 1]; ++p, ++echo) {
```

```
    /* Distance */
```

```
    distance[i][echo] = data[p * 2];
```

```
    /* Intensity */
```

```
    intensity[i][echo] = data[p * 2 + 1];
```

```
}
```

## 7.2 Three-Dimensional Transformations

Using the distance data contained in the packets and the coordinate conversion tables, the 3D coordinates of each measured point can be calculated.

In this document, a right-handed coordinate system is used in which the sensor's front, left, and up directions correspond to the positive X, Y, and Z axes respectively. Length units are omitted, and angles are expressed in radians.

### 7.2.1 Computation of horizontal and vertical angles for each spot

$i$  : spot index

$tblv[i]$  : value of the horizontal coordinate conversion table for spot  $i$

(obtained with the GET command "tv\*\*")

$tblh[i]$  : value of the vertical coordinate conversion table for spot  $i$

(obtained with the GET command "tblh")

$\phi_{\text{head}}$  : vertical angle of the first spot in the line (head direction)

$\phi_{\text{tail}}$  : vertical angle of the last spot in the line (tail direction)

[Horizontal angle  $\theta_i$ ]

$$\theta_i = tblv[i] \times \frac{2\pi}{65535}$$

The horizontal measurement range is common to all lines, so the horizontal coordinate conversion table  $tblv$  can be used to compute the horizontal angle for each spot.

[Vertical angle  $\phi_i$ ]


$$\phi_i = \left( \phi_{\text{head}} + (\phi_{\text{tail}} - \phi_{\text{head}}) \times \frac{tblh[i]}{65535} \right) \times \frac{2\pi}{65535}$$

The vertical measurement range varies from line to line. Therefore, the vertical angle of each spot is calculated from the absolute angles of the first and last spots in the line ( $\phi_{\text{head}}$  and  $\phi_{\text{tail}}$ ) and the vertical coordinate conversion table  $tblh$ , which represents the relative vertical position of each spot within the line.

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 24 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|

7.2.2 Conversion to Cartesian coordinates

Each spot can be represented in a spherical coordinate system as shown in the figure in the original document.

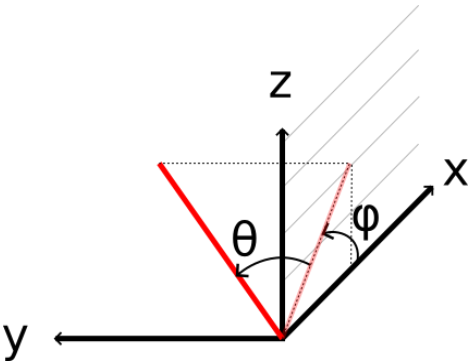

Let  $r_i$  be the distance of spot  $i$ ,  $\phi_i$  its vertical angle, and  $\theta_i$  its horizontal angle. The Cartesian coordinates  $(x_i, y_i, z_i)$  are given by:

$$x_i = r_i \cdot \cos(\phi_i) \cdot \cos(\theta_i)$$

$$y_i = r_i \cdot \cos(\phi_i) \cdot \sin(\theta_i)$$

$$z_i = r_i \cdot \sin(\phi_i)$$

|       |                                                         |                |            |         |
|-------|---------------------------------------------------------|----------------|------------|---------|
| TITLE | UCT series VSSP Communication<br>Protocol Specification | Drawing<br>NO. | C-42-04610 | 25 / 25 |
|-------|---------------------------------------------------------|----------------|------------|---------|