

JAKAJAT / KYTKIMET

ORL0404300

Jakokytkin 4 CAM EXT

- Kytkimet useamman kameran liittämiseksi monitoriin
- Kameroiden liittäminen kolmannen osapuolen tuotteisiin
- MultiView boxit monitorin kuvanjakoon
- Videojakajat (esim. kuvanjako useammalle monitorille)






TUOTEKUVAUS


Jakajien "switchers" avulla saadaan monitorille kytkettyä maksimissaan neljä (4) kameraa. Jakajilla saadaan monitorille yhden kameran kuva kerrallaan. Haluttaessa jakaa näyttö useamman kameran kesken täytyy käyttää Multiview boxia.

Esimerkkejä näytön jaosta käytettäessä Multiview boxia:

Options for channel 1-4:

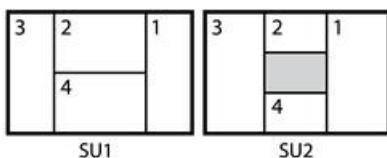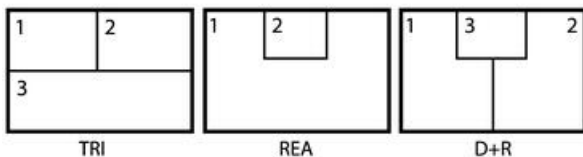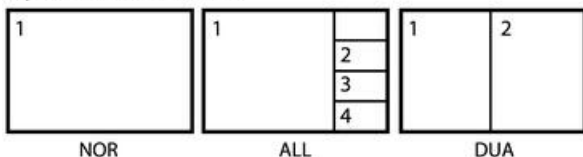

Default channel 5:



TEKNISET TIEDOT

IP-luokka	IP54
Max. käyttölämpötila	85 °C
Min. käyttölämpötila	-40 °C
Tyyppi	Analogia

Electrical connections

Camera connectors

- Cam 1,2,3,4
1 = Video in
2 = Video GND
3 = Power out
4 = GND



4p female connector

Output connector

Monitor

- 1 = Video out
2 = Video GND
3 = Power in (When fuse in FH101)
4 = GND



4p male connector

Switch wires, 8p female connector

- 1 = Red = Power in (When fuse in FH100)
2 = White = GND
3 = Blue = Select Cam 1
4 = Brown = Select Cam 2
5 = White/yellow = Select Cam 3
6 = Grey = Select Cam 4
7 = Yellow = Feedback Cam select, see dipswitch settings



8p female connector

Dimensions

