



SME52 JA SMAZ-LINEAARIANTURIT

Kosketukseton lineaarianturi

SMAZ-AI120PROGL010

Lineaarianturi, 4-20mA

- Kosketukseton mittaus
- Ulostulot: push-pull, SSI, tai analogia
- Lukuteippi myydään erikseen



TUOTEKUVAUS

Lika Electronicilta löytyy laaja valikoima lineaariantureita. Lineaariantureissa on pitkä käyttöikä, koska tekniikka on kosketukseton. Valikoimissa on myös erikoismalleja eri käyttökohteisiin.

TEKNISET TIEDOT



TIEDOT

IP-luokka	IP67
Max. syöttöjännite DC	30 V DC
Min. käyttölämpötila	-25 °C
Max. käyttölämpötila	85 °C
Anturin tyyppi	Absoluuttianturi
Min. syöttöjännite DC	10 V DC
Ulostulo	4-20 mA
Liitäntä	Kaapeli

Order code - Magnetic tape

MTX	-	XXX	-	XX	-	XXXXX	-	X	-	X	-	X	-	XXX	(SMAZ)
MTX															
MTX															


① CODING	② PROFILE LENGTH	③ BLANKHEAD	④ COVER STRIP	⑤ ACCURACY CLASS
A101 = SMAZ absolute coding (MTX)	000000 = 200 mm (S) = 200 only for MTX	B = supplied	C = supplied	050 = ± 20µm
A102 = SMAZ absolute coding (MTX)	000000 = 300 mm (S) = 300 only for MTX	N = not supplied	N = not supplied	
	000000 = 400 mm (S) = 400 only for MTX			
⑥ WIDTH	000000 = 110 mm (S) = 1100 only for MTX	⑦ PRINTING		
20 = 20 mm		P = standard		
		S = custom		
				⑧ CUSTOM VERSION

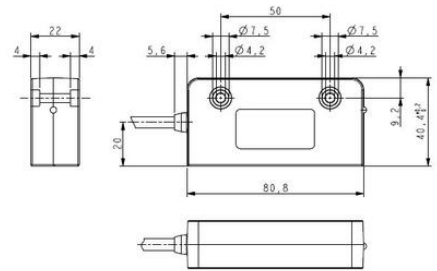

SMAZ • SMAZ


A	Reference sensor "R"
B	Dust wipers
C	Limit switch sensors
D	Diagnostic LEDs
E	Gap/Speed error (red)
R	Reference detection (green)
1	Limit switch (green)
2	Limit switch (green)

SME52

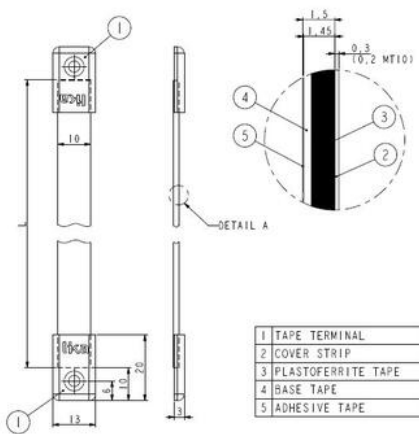


1	TAPE TERMINAL
2	COVER STRIP
3	PLASTOFERRITE TAPE
4	BASE TAPE
5	ADHESIVE TAPE

MTI-0500-10

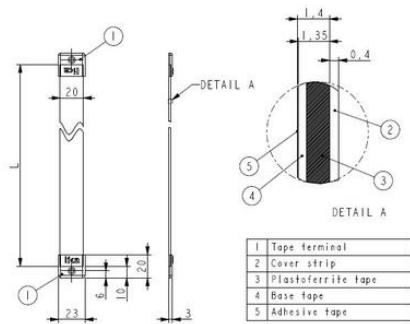


1	Tape terminal
2	Cover strip
3	Plastoferrite tape
4	Base tape
5	Adhesive tape

MTA-A301 • MTA-A302

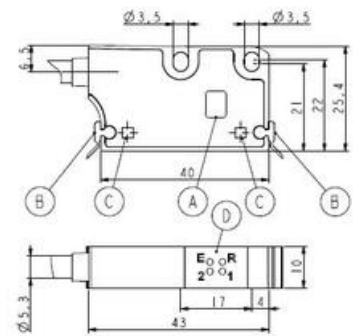


A	Reference sensor "R"
B	Dust wipers
C	Limit switch sensors
D	Diagnostic LEDs
E	Gap/Speed error (red)
R	Reference detection (green)
1	Limit switch (green)
2	Limit switch (green)

SME52

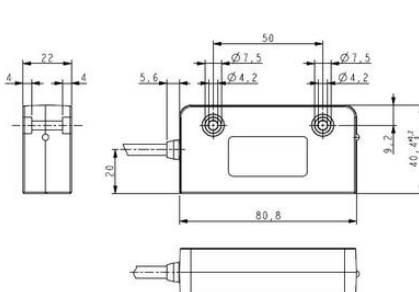


SMAZ • SMAZ

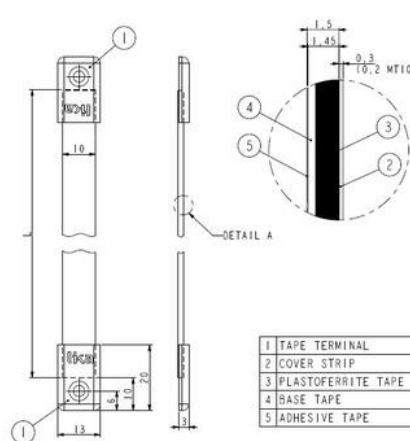

1	TAPE TERMINAL
2	COVER STRIP
3	PLASTOFERRITE TAPE
4	BASE TAPE
5	ADHESIVE TAPE

MTI-0500-10

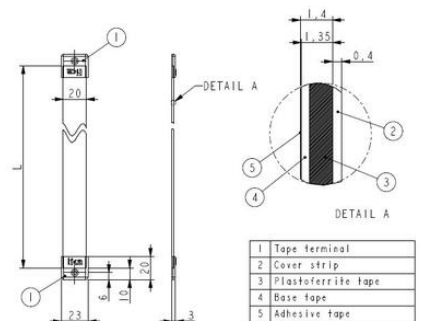

1	Tape terminal
2	Cover strip
3	Plastoferrite tape
4	Base tape
5	Adhesive tape

MTA-A301 • MTA-A302

